



Since 1935

TIRE CATALOGUE

PASSENGER CAR TIRE
TRUCK & BUS TIRE
SPECIALTY TIRE



TIRE CATALOGUE

**PASSENGER CAR TIRE
TRUCK& BUS TIRE
SPECIALTY TIRE**

CONTENTS

04
LINGLONG 5+3 GLOBAL LAYOUT

06
SPORTS EVENTS

10
OEMs

12

PCR
TIRE


30

TBR
TIRE

48

SPECIALTY
TIRE

LINGLONG 5+3 GLOBAL LAYOUT

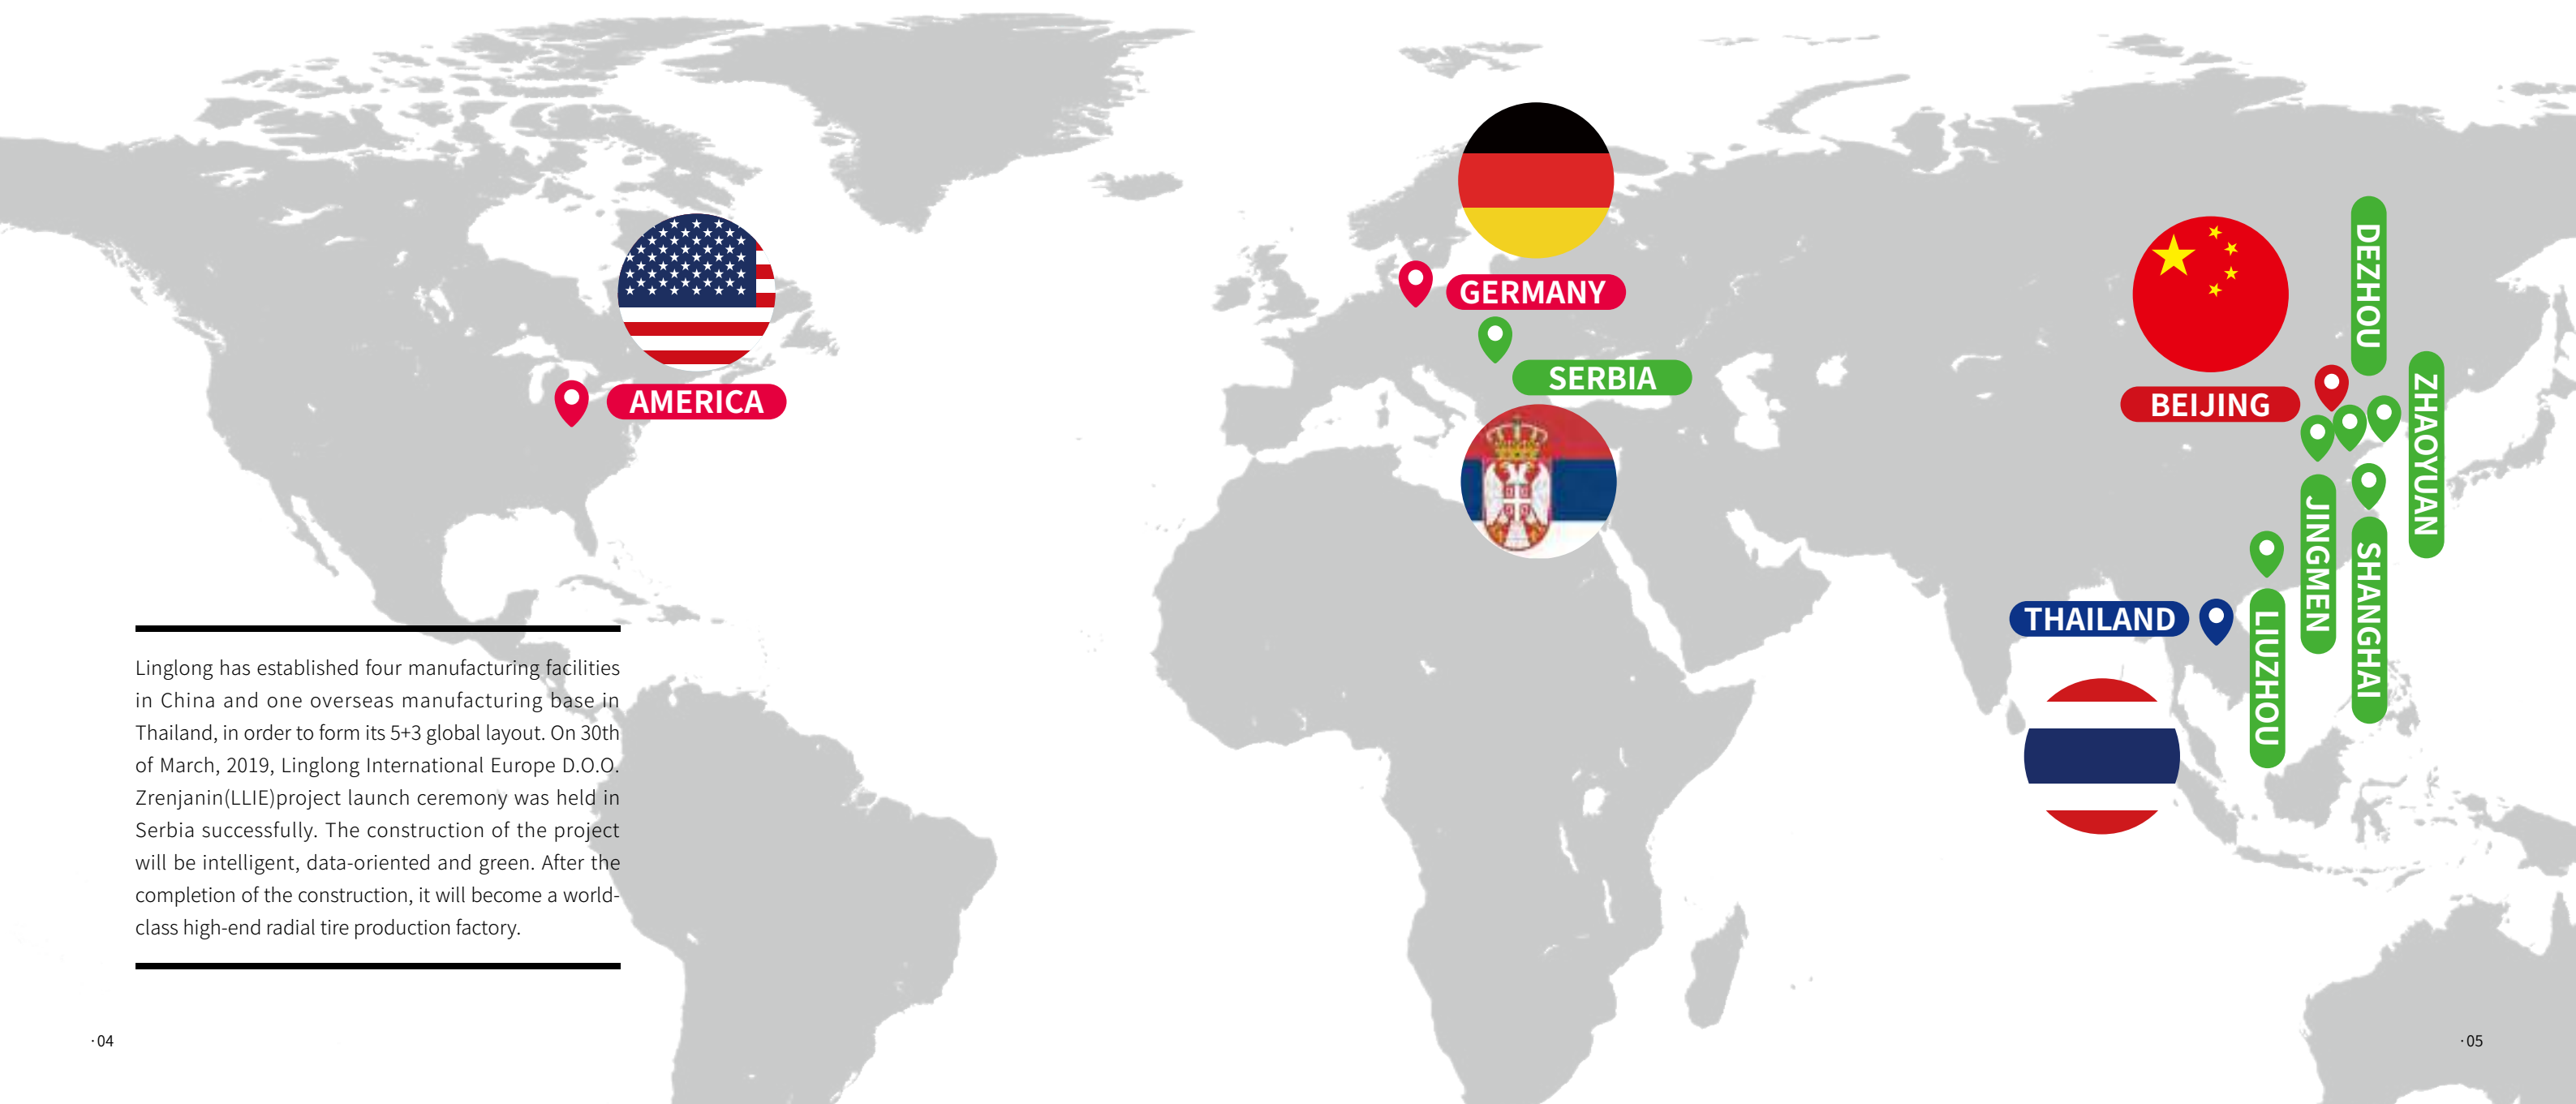

AMERICA



GERMANY



SERBIA



THAILAND



BEIJING



DEZHOU



JINGMEN



SHANGHAI



ZHAOYUAN



Linglong has established four manufacturing facilities in China and one overseas manufacturing base in Thailand, in order to form its 5+3 global layout. On 30th of March, 2019, Linglong International Europe D.O.O. Zrenjanin(LLIE)project launch ceremony was held in Serbia successfully. The construction of the project will be intelligent, data-oriented and green. After the completion of the construction, it will become a world-class high-end radial tire production factory.

SPORTS EVENTS



JUVENTUS
Official Tire

Sponsor the VfL Wolfsburg



Sponsor the
Ratchaburi Mitr
Phol FC

Title Sponsor Of
Serbian Super league



Set up ATLAS drift team for D1 GRAND PRIX
SERIES in China



Set up Linglong drift team for
D1 GRAND PRIX in Japan

Official Tire Of
The Tampa Bay
Lightning



OEMS

Passenger cars



Truck and Bus



PCR TIRE





FORCE HP




© Made in Thailand



Asymmetric tread pattern design for better drainage performance inside and grip performance outside, excellent steering and handling performance.



Multiple variable pitch design-Multiple variable pitch design to optimize pitch ratio and pitch arrangement, reduce noise and enhance handling performance.



High angle of shoulder groove Improve steering performance.



Strength rib of central pattern block-Increase stiffness of central pattern block, improve braking performance and traction performance.

RIM	Size	Load Index & Speed Symbols	Standard Rim	Standard Load	Inflated Pressure	Overall Diameter	Overall Width	Tread Depth	UTQG
				lbs	psi	in	in	32nds	
14	185/60R14▲	82H	5 1/2J	1047	36	22.76	7.44	9.83	700/A/A
	185/65R14▲	86H	5 1/2J	1168	36	23.46	7.44	9.83	700/A/A
15	175/65R15▲	84H	5J	1102	36	23.98	6.97	9.70	700/A/A
	185/55R15▲	82V	6J	1047	36	23.03	7.64	9.83	700/A/A
	185/65R15▲	88H	5 1/2J	1235	36	24.45	7.44	9.83	700/A/A
	195/50R15▲	82H	6J	1047	36	22.72	7.91	9.95	700/A/A
	195/55R15▲	85V	6J	1135	36	23.43	7.91	9.95	700/A/A
	195/60R15▲	88H	6J	1235	36	24.21	7.91	9.95	700/A/A
	195/65R15▲	91H	6J	1356	36	25.00	7.91	9.95	700/A/A
	205/60R15	91H	6J	1356	36	24.69	8.23	10.08	700/A/A
	205/65R15	94H	6J	1477	36	25.47	8.23	10.08	700/A/A
	215/60R15	94H	6 1/2J	1477	36	25.16	8.70	10.20	700/A/A
16	195/50R16▲	84V	6J	1102	36	23.70	7.91	9.95	700/A/A
	195/55R16▲	87V	6J	1201	36	24.41	7.91	9.95	700/A/A
	205/50R16	87V	6 1/2J	1201	36	24.09	8.43	10.08	700/A/A
	205/55R16	91V	6 1/2J	1356	36	24.88	8.43	10.08	700/A/A
	205/60R16	92V	6J	1389	36	25.67	8.23	10.08	700/A/A
	205/65R16	95H	6J	1521	36	26.46	8.23	10.08	700/A/A
	215/55R16 XL	97H	7J	1609	42	25.28	8.90	10.20	700/A/A
	215/60R16	95V	6 1/2J	1521	36	26.14	8.70	10.20	700/A/A
	215/65R16	98H	6 1/2J	1653	36	27.01	8.70	10.20	700/A/A
	225/55R16	95V	7J	1521	36	25.75	9.17	9.95	700/A/A
	225/60R16	98H	6 1/2J	1653	36	26.61	8.98	10.33	700/A/A
	225/65R16	100H	6 1/2J	1764	36	27.48	8.98	10.33	700/A/A
	235/60R16	100H	7J	1764	36	27.09	9.45	10.46	700/A/A
	205/50R17 XL	93V	6 1/2J	1433	42	25.12	8.43	10.08	700/A/A
17	215/45R17 XL	91V	7J	1356	42	24.65	8.39	10.20	700/A/A
	215/50R17 XL	95V	7J	1521	42	25.51	8.90	10.20	700/A/A
	215/55R17	94V	7J	1477	36	26.30	8.90	10.20	700/A/A
	225/45R17 XL	94V	7 1/2J	1477	42	24.96	8.86	10.33	700/A/A
	225/50R17 XL	98V	7J	1653	42	25.91	9.17	10.33	700/A/A
	225/55R17	97V	7J	1609	36	26.77	9.17	10.33	700/A/A
	225/60R17	99H	6 1/2J	1709	36	27.64	8.98	10.33	700/A/A
	225/65R17	102H	6 1/2J	1874	36	28.50	8.98	10.33	700/A/A
	235/45R17 XL	97V	8J	1609	42	25.35	9.29	10.46	700/A/A
	235/55R17	99V	7 1/2J	1709	36	27.17	9.65	10.46	700/A/A
	235/60R17	102H	7J	1874	36	28.11	9.45	10.46	700/A/A
	235/65R17	104H	7J	1984	36	29.06	9.45	10.46	700/A/A
	245/45R17 XL	99V	8J	1709	42	25.67	9.57	10.58	700/A/A
	245/50R17	99V	7 1/2J	1709	36	26.69	9.96	10.58	700/A/A
	225/40R18 XL	92V	8J	1389	42	25.08	9.06	10.33	700/A/A
18	225/45R18 XL	95V	7 1/2J	1521	42	25.94	8.86	10.33	700/A/A
	225/50R18 XL	99V	7J	1709	42	26.89	9.17	10.33	700/A/A
	225/55R18	98V	7J	1653	36	27.76	9.17	10.33	700/A/A
	225/60R18	100H	6 1/2J	1764	36	28.62	8.98	10.33	700/A/A
	235/40R18 XL	95V	8 1/2J	1521	42	25.39	9.49	10.46	700/A/A
	235/45R18	94V	8J	1477	36	26.34	9.29	10.46	700/A/A
	235/50R18	97V	7 1/2J	1609	36	27.28	9.65	10.46	700/A/A
	235/55R18	100V	7 1/2J	1764	36	28.15	9.65	10.46	700/A/A
	235/60R18	103V	7J	1929	36	29.09	9.45	10.46	700/A/A
	245/40R18 XL	97V	8 1/2J	1609	42	25.71	9.76	10.58	700/A/A
19	245/45R18 XL	100V	8J	1764	42	26.65	9.57	10.58	700/A/A
	235/55R19	101V	7 1/2J	1819	36	29.17	9.65	10.46	700/A/A
	245/40R19 XL	98V	8 1/2J	1653	42	26.73	9.76	10.58	700/A/A
20	255/50R19 XL	107V	8J	2149	42	29.09	10.43	10.71	700/A/A
	245/45R20	99V	8J	1709	36	28.66	9.57	10.58	700/A/A
	245/50R20	102V	7 1/2J	1874	36	29.69	9.96	10.58	700/A/A

▲: THREE GROOVES




© Made in Thailand




Asymmetric tread pattern design for better drainage performance inside and grip performance outside, excellent steering and handling performance.




3D sipes-Increase the stiffness of tread in the process of driving, improve the stability of tire when accelerating, braking and turning, improve steering performance



Strength rib of shoulder-Improve shoulder stiffness, improve handling performance. Reduce shoulder vibration to improve comfort performance and reduce noise.



The cross grooves is full depth of main grooves-Improve tire drainage speed, improve wet performance.



4 longitudinal groove design for wet braking and traction performance.

RIM	Size	Load Index & Speed Symbols	Standard Rim	Standard Load	Inflated Pressure	Overall Diameter	Overall Width	Tread Depth	UTQG
				lbs	psi	in	in	32nds	
16	205/50R16	87W	6 1/2J	1201	36	24.09	8.43	9.70	520/AA/A
	205/55R16	91W	6 1/2J	1356	36	24.88	8.43	9.70	520/AA/A
	215/55R16 XL	97W	7J	1609	42	25.28	8.90	9.83	520/AA/A
	225/50R16	92W	7J	1389	36	24.88	9.17	9.95	520/AA/A
	225/55R16	95W	7J	1521	36	25.75	9.17	9.95	520/AA/A
	195/45R16 XL	84V	6 1/2J	1102	42	22.91	7.68	9.70	520/AA/A
	215/50R16 XL	94W	7J	1477	42	24.49	8.90	9.70	520/AA/A
17	205/45R17 XL	88W	7J	1235	42	24.25	8.11	9.70	520/AA/A
	205/50R17 XL	93W	6 1/2J	1433	42	25.12	8.43	9.70	520/AA/A
	215/45R17 XL	91W	7J	1356	42	24.65	8.39	9.83	520/AA/A
	215/50R17 XL	95W	7J	1521	42	25.51	8.90	9.83	520/AA/A
	215/55R17	94W	7J	1477	36	26.30	8.90	9.83	520/AA/A
	225/45R17 XL	94W	7 1/2J	1477	42	24.96	8.86	9.95	520/AA/A
	225/50R17 XL	98W	7J	1653	42	25.91	9.17	9.95	520/AA/A
	225/55R17	97W	7J	1609	36	26.77	9.17	9.95	520/AA/A
	235/45R17 XL	97W	8J	1609	42	25.35	9.29	10.08	520/AA/A
	235/50R17	96W	7 1/2J	1565	36	26.30	9.65	10.08	520/AA/A
	235/55R17	99W	7 1/2J	1709	36	27.17	9.65	10.08	520/AA/A
	245/40R17	91W	8 1/2J	1356	36	24.72	9.76	10.20	520/AA/A
	245/45R17 XL	99W	8J	1709	42	25.67	9.57	10.20	520/AA/A
	275/40R17	98W	9 1/2J	1653	36	25.67	10.94	10.58	520/AA/A
	245/65R17 XL	111H	7J	2403	42	29.53	9.76	10.33	520/AA/A
	255/40R17 XL	98W	9J	1653	42	25.04	10.24	9.70	520/AA/A
	195/40R17 XL*	81V	7J	1019	42	23.15	7.87	9.70	520/AA/A
	195/45R17 XL	85W	6 1/2J	1135	42	23.94	7.68	9.70	520/AA/A
	215/40R18	85Y	7 1/2J	1135	36	24.76	8.58	9.83	520/AA/A
18	215/45R18 XL	93Y	7J	1433	42	25.63	8.39	9.83	520/AA/A
	225/40R18 XL	92Y	8J	1389	42	25.08	9.06	9.95	520/AA/A
	225/45R18 XL	95Y	7 1/2J	1521	42	25.94	8.86	9.95	520/AA/A
	225/50R18	95W	7J	1521	36	26.89	9.17	9.95	520/AA/A
	235/40R18 XL	95Y	8 1/2J	1521	42	25.39	9.49	10.08	520/AA/A
	235/45R18 XL	98Y	8J	1653	42	26.34	9.29	10.08	520/AA/A
	235/50R18	97Y	7 1/2J	1609	36	27.28	9.65	10.08	520/AA/A
	245/40R18 XL	97Y	8 1/2J	1609	42	25.71	9.76	10.20	520/AA/A
	245/45R18 XL	100Y	8J	1764	42	26.65	9.57	10.20	520/AA/A
	245/50R18	100Y	7 1/2J	1764	36	27.68	9.96	10.20	520/AA/A
	255/35R18 XL	94Y	9J	1477	42	25.00	10.24	10.33	520/AA/A
	255/40R18 XL	99Y	9J	1709	42	26.02	10.24	10.33	520/AA/A
	255/45R18 XL	103W	8 1/2J	1929	42	27.05	10.04	10.33	520/AA/A
	255/55R18 XL	109W	8J	2271	42	29.02	10.43	10.33	520/AA/A
	265/35R18 XL	97W	9 1/2J	1609	42	25.31	10.67	10.46	520/AA/A
	265/40R18 XL	101Y	9 1/2J	1819	42	26.34	10.67	10.46	520/AA/A
	275/35R18	95Y	9 1/2J	1521	36	25.55	10.94	10.58	520/AA/A
	275/40R18 XL	103Y	9 1/2J	1929	42	26.65	10.94	10.58	520/AA/A
	225/35R18 XL	87W	8J	1201	42	24.21	9.06	9.70	520/AA/A
	205/35R18 XL*	81W	7 1/2J	1019	42	23.66	8.35	9.70	520/AA/A
	305/30R18*	97W	11J	1609	36	25.35	12.32	10.33	520/AA/A

* New Specifications

FORCE UHP

RIM	Size	Load Index & Speed Symbols	Standard Rim	Standard Load	Inflated Pressure	Overall Diameter	Overall Width	Tread Depth	UTQG
				lbs	psi	in	in	32nds	
18	205/40R18 XL	86W	7 1/2J	1168	42	24.45	8.35	9.70	520/AA/A
	195/35R18 XL	79W	7J	963	42	23.50	7.87	9.70	520/AA/A
19	225/40R19 XL	93Y	8J	1433	42	26.10	9.06	9.95	520/AA/A
	225/45R19 XL	96Y	7 1/2J	1565	42	26.97	8.86	9.95	520/AA/A
	235/40R19 XL	96Y	8 1/2J	1565	42	26.42	9.49	10.08	520/AA/A
	235/55R19 XL	105Y	7 1/2J	2039	42	29.17	9.65	10.08	520/AA/A
	245/40R19 XL	98Y	8 1/2J	1653	42	26.73	9.76	10.20	520/AA/A
	245/45R19 XL	102W	8J	1874	42	27.68	9.57	10.20	520/AA/A
	245/50R19 XL	105W	7 1/2J	2039	42	28.70	9.96	10.20	520/AA/A
	255/35R19 XL	96Y	9J	1565	42	26.02	10.24	10.33	520/AA/A
	255/40R19 XL	100Y	9J	1764	42	27.05	10.24	10.33	520/AA/A
	255/45R19 XL	104Y	8 1/2J	1984	42	28.07	10.04	10.33	520/AA/A
	255/50R19 XL	107Y	8J	2149	42	29.09	10.43	10.33	520/AA/A
	265/40R19 XL	102Y	9 1/2J	1874	42	27.36	10.67	10.46	520/AA/A
	265/50R19 XL	110W	8 1/2J	2337	42	29.49	10.91	10.46	520/AA/A
	275/35R19 XL	100Y	9 1/2J	1764	42	26.57	10.94	10.58	520/AA/A
	275/40R19 XL	105Y	9 1/2J	2039	42	27.68	10.94	10.58	520/AA/A
	285/35R19 XL	103Y	10J	1929	42	26.89	11.42	10.71	520/AA/A
	235/35R19 XL	91Y	8 1/2J	1356	42	25.47	9.49	9.70	520/AA/A
	265/30R19 XL	93W	9 1/2J	1433	42	25.31	10.67	9.70	520/AA/A
	245/35R19 XL	93W	8 1/2J	1433	42	25.79	9.76	9.70	520/AA/A
	255/60R19	109H	7 1/2J	2271	36	31.06	10.24	10.33	520/AA/A
20	275/45R19 XL	108W	9J	2205	42	28.78	10.75	10.33	520/AA/A
	275/55R19	111W	8 1/2J	2403	36	30.91	11.18	10.33	520/AA/A
	285/45R19 XL	111W	9 1/2J	2403	42	29.09	11.22	10.33	520/AA/A
	295/30R19 XL	100W	10 1/2J	1764	42	26.02	11.85	9.70	520/AA/A
	245/55R19	103V	7 1/2J	1929	36	29.65	9.96	10.33	520/AA/A
	225/35R19 XL	88W	8J	1235	42	25.24	9.06	9.70	520/AA/A
	275/30R19 XL*	96W	9 1/2J	1565	42	25.55	10.94	10.33	520/AA/A
	215/35R19 XL	85V	7 1/2J	1135	42	24.92	8.58	9.70	520/AA/A
	265/35R19 XL*	98Y	9 1/2J	1653	42	26.34	10.67	9.70	520/AA/A
	225/30R20*	85W	9J	1135	36	26.06	10.24	9.95	520/AA/A
	225/35R20 XL	90W	8J	1323	42	26.22	9.06	9.95	520/AA/A
	245/35R20 XL	95W	8 1/2J	1521	42	26.77	9.76	10.20	520/AA/A
	245/40R20 XL	99Y	8 1/2J	1709	42	27.72	9.76	10.20	520/AA/A
	245/45R20 XL	103Y	8J	1929	42	28.66	9.57	10.20	520/AA/A
	255/35R20 XL	97Y	9J	1609	42	27.01	10.24	10.33	520/AA/A
	255/45R20 XL	105Y	8 1/2J	2039	42	29.06	10.04	10.33	520/AA/A
	255/50R20 XL	109Y	8J	2271	42	30.08	10.43	10.33	520/AA/A
	265/35R20 XL	99Y	9 1/2J	1709	42	27.32	10.67	10.46	520/AA/A
	265/45R20 XL	108Y	9J	2205	42	29.37	10.47	10.46	520/AA/A
	275/30R20 XL	97Y	9 1/2J	1609	42	26.54	10.94	10.58	520/AA/A
20	275/25R30 XL	101W	10J	1819	42	35.43	11.14	10.33	520/AA/A
	275/40R20 XL	106Y	9 1/2J	2094	42	28.66	10.94	10.58	520/AA/A
	275/45R20 XL	110W	9J	2337	42	29.76	10.75	10.58	520/AA/A
	235/30R20 XL	88W	8 1/2J	1235	42	25.59	9.53	9.70	520/AA/A

* New Specifications

FORCE UHP

RIM	Size	Load Index & Speed Symbols	Standard Rim	Standard Load	Inflated Pressure	Overall Diameter	Overall Width	Tread Depth	UTQG
				lbs	psi	in	in	32nds	
20	245/50R20	102V	7 1/2J	1874	36	29.69	9.96	10.33	520/AA/A
	235/35R20 XL	92W	8 1/2J	1389	42	26.46	9.49	9.70	520/AA/A
	245/30R20 XL	90W	8 1/2J	1323	42	25.83	9.76	9.70	520/AA/A
	255/30R20 XL	92W	9J	1389	42	26.06	10.24	9.70	520/AA/A
	255/40R20 XL	101W	9J	1819	42	28.03	10.24	10.33	520/AA/A
	285/25R20 XL	93W	10 1/2J	1433	42	25.59	11.61	9.70	520/AA/A
	295/25R20 XL	95Y	10 1/2J	1521	42	25.83	11.85	9.70	520/AA/A
	305/25R20 XL	97Y	11J	1609	42	25.98	12.32	10.33	520/AA/A
	315/35R20 XL	110W	11J	2337	42	28.66	12.60	10.33	520/AA/A
	265/50R20 XL	111V	8 1/2J	2403	42	30.47	10.91	10.33	520/AA/A
	285/50R20	112V	9J	2469	36	31.26	11.69	10.33	520/AA/A
	215/30R20 XL*	82W	7 1/2J	1047	42	25.24	8.58	9.70	520/AA/A
	295/35R21 XL	107Y	10 1/2J	2149	42	29.09	11.85	10.83	520/AA/A
	245/35R21 XL	96W	8 1/2J	1565	42	27.76	9.76	9.70	520/AA/A
21	255/30R21 XL*	93W	9J	1433	42	27.05	10.24	9.70	520/AA/A
	285/30R21 XL*	100Y	10J	1764	42	27.76	11.42	9.70	520/AA/A
	235/35R21	89W	8 1/2J	1279	36	27.64	9.49	9.70	520/AA/A
	245/30R21 XL*	91W	8 1/2J	1356	42	26.81	9.76	9.70	520/AA/A
	265/40R21 XL	105V	9 1/2J	2039	42	29.33	10.67	10.33	520/AA/A
	275/35R21	99W	9 1/2J	1709	36	28.54	10.94	10.33	520/AA/A
	245/30R22 XL	92W	8 1/2J	1389	42	27.83	9.76	10.20	520/AA/A
	255/30R22 XL	95W	9J	1521	42	28.07	10.24	10.33	520/AA/A
22	285/35R22 XL	106W	10J	2094	42	29.88	11.42	10.71	520/AA/A
	265/30R22 XL	97W	9 1/2J	1609	42	28.31	10.67	9.70	520/AA/A
	265/40R22 XL	106V	9 1/2J	2094	42	30.35	10.67	10.33	520/AA/A
	285/25R22 XL	95Y	10 1/2J	1521	42	27.60	11.61	9.70	520/AA/A
	285/40R22 XL	110V	10J	2337	42	30.98	11.42	10.33	520/AA/A
	285/45R22 XL	114V	9 1/2J	2601	42	32.09	11.22	10.33	520/AA/A
	295/25R22 XL*	97W	10 1/2J	1609	42	27.83	11.85	9.70	520/AA/A
	305/25R22 XL*	99Y	11J	1709	42	27.99	12.32	10.33	520/AA/A
	305/45R22 XL	118V	10J	2910	42	32.80	11.93	10.33	520/AA/A
	265/35R22 XL	102V	9 1/2J	1874	42	29.33	10.67	9.70	520/AA/A
	305/40R22 XL	114V	11J	2601	42	31.61	12.32	10.33	520/AA/A
	255/30R24 XL	97W	9J	1609	42	30.08	10.24	10.33	520/AA/A
	275/25R24 XL*	96W	10J	1565	42	29.45	11.14	10.33	520/AA/A
	275/30R24 XL	101W	9 1/2J	1819	42	30.55	10.94	10.33	520/AA/A
	295/35R24 XL	110V	10 1/2J	2337	42	32.13	11.85	10.33	520/AA/A
	305/35R24 XL	112V	11J	2469	42	32.44	12.32	10.33	520/AA/A
26	255/30R26 XL*	99W	9J	1709	42	32.05	10.24	10.33	520/AA/A
	275/25R26 XL*	98W	10J	1653	42	31.42	11.14	10.33	520/AA/A
	295/30R26 XL	107W	10 1/2J	2149	42	32.99	11.85	10.33	520/AA/A
	305/30R26 XL*	109W	11J	2271	42	33.23	12.32	10.33	520/AA/A
28	295/25R28 XL	103V	10 1/2J	1929	42	33.82	11.85	10.33	520/AA/A
	275/25R28 XL	99W	10J	1709	42	33.54	11.06	10.33	520/AA/A
30	275/25R30 XL*	101W	10J	1819	42	35.43	11.14	10.33	520/AA/A

* New Specifications



PARALLER 4X4 HP




© Made in Thailand




Asymmetric tread pattern design for better drainage performance inside and grip performance outside, excellent steering and perfect handling performance.



4 longitudinal groove design for wet braking and traction performance.



Continuous shoulder design, improve the shoulder stiffness,high speed performance more stability.



Groove and sipe groove imrove handling and comfort.

RIM	Size	Load Index & Speed Symbols	Standard Rim	Standard Load	Inflated Pressure	Overall Diameter	Overall Width	Tread Depth	UTQG
				lbs	psi	in	in	32nds	
16	215/65R16 XL	102H	6 1/2J	1874	42	27.01	8.70	10.08	480/A/A
	215/70R16	100H	6 1/2J	1764	36	27.87	8.70	10.08	480/A/B
	225/75R16	104H	6J	1984	36	29.29	8.78	10.08	480/A/B
	235/70R16*	106H	7J	2094	36	28.98	9.45	10.08	480/A/B
	245/70R16 XL*	111H	7J	2403	42	29.53	9.76	10.08	480/A/B
	265/70R16*	112H	8J	2469	36	30.63	10.71	10.08	480/A/B
17	225/55R17 XL	101V	7J	1819	42	26.77	9.17	9.70	480/A/A
	225/65R17	102H	6 1/2J	1874	36	28.50	8.98	10.08	480/A/A
	215/60R17	96H	6 1/2J	1565	36	27.17	8.70	10.08	480/A/A
	225/60R17	99H	6 1/2J	1709	36	27.64	8.98	10.08	480/A/A
	235/55R17 XL	103W	7 1/2J	1929	42	27.17	9.65	9.70	480/A/A
	235/60R17 XL	106V	7J	2094	42	28.11	9.45	10.08	480/A/A
	235/65R17	108V	7J	2205	42	29.06	9.45	10.08	480/A/A
	245/65R17 XL	111H	7J	2403	42	29.53	9.76	10.08	480/A/A
	255/65R17	110H	7 1/2J	2337	36	30.08	10.24	10.08	480/A/A
	265/65R17	112H	8J	2469	36	30.55	10.71	10.08	480/A/A
18	225/60R18	100H	6 1/2J	1764	36	28.62	8.98	10.08	480/A/A
	235/55R18 XL	104V	7 1/2J	1984	42	28.15	9.65	9.70	480/A/A
	235/60R18 XL*	107V	7J	2149	42	29.09	9.45	10.08	480/A/A
	235/65R18	106H	7J	2094	36	30.04	9.45	10.08	480/A/A
	245/60R18	105V	7J	2039	36	29.57	9.76	10.08	480/A/A
	255/55R18 XL	109V	8J	2271	42	29.02	10.43	9.70	480/A/A
	265/60R18*	110H	8J	2337	36	30.51	10.71	10.08	480/A/A
	265/65R18*	114H	8J	2601	36	31.54	10.71	10.08	480/A/A
	275/65R18*	116H	8J	2756	36	32.09	10.98	10.08	480/A/A

* New Specifications



PARALLER H/T



© Made in Thailand



4 longitudinal groove variable groove wall break line design for wet braking and traction performance.



Unique tread fine pattern – Easy to destroy water film, enhance wet performance.



Cross groove and semi-cross groove design ,improve the wet performance also keep the tread stiffness,ensure the high speed wear performance.

RIM	Size	Ply Rating	Load Index & Speed Symbols	Standard Rim	Standard Load	Inflated Pressure	Overall Diameter	Overall Width	Tread Depth
					lbs	psi	in	in	32nds
15	235/75R15 XL*	/	109T	6 1/2J	2271	42	28.86	9.25	10.96
	215/70R16*	/	100T	6 1/2J	1764	36	27.87	8.70	10.96
16	225/70R16*	/	103T	6 1/2J	1929	36	28.43	8.98	10.96
	265/70R16*	/	112T	8J	2469	36	30.63	10.71	11.59
	265/75R16*	/	116T	7 1/2J	2756	36	31.65	10.51	11.59
	235/70R16	/	106T	7J	2094	36	28.98	9.45	10.96
	245/70R16	/	107T	7J	2149	36	29.53	9.76	11.59
	245/75R16	/	111T	7J	2403	36	30.47	9.76	11.59
	255/70R16	/	111T	7 1/2J	2403	36	30.08	10.24	11.59
	LT215/85R16	10PR	115/112S	6J	D 2470 S 2680	80	30.39	8.50	13.48
	LT225/75R16	10PR	115/112S	6J	D 2470 S 2680	80	29.29	8.78	13.48
	LT235/85R16	10PR	120/116R	6 1/2J	D 2835 S 3085	80	31.73	9.25	13.48
	LT245/75R16*	10PR	120/116R	7J	D 2778 S 3042	80	30.47	9.76	13.48
	LT265/75R16*	10PR	123/120R	7 1/2J	D 3085 S 3415	80	31.65	10.51	13.48
	LT265/70R17*	10PR	121/118R	8J	D 2910 S 3195	80	31.65	10.71	13.00
	235/65R17	/	104T	7J	1984	36	29.06	9.45	10.96
17	245/65R17	/	107T	7J	2149	36	29.53	9.76	11.59
	245/70R17	/	110T	7J	2337	36	30.55	9.76	11.59
	265/65R17	/	112T	8J	2469	36	30.55	10.71	11.59
	265/70R17	/	115T	8J	2679	36	31.65	10.71	11.97
	265/50R20 XL	/	111V	8 1/2J	2403	42	30.47	10.91	11.34
	275/55R20 XL	/	117T	8 1/2J	2833	42	31.89	11.18	11.34
20	275/60R20*	/	115T	8J	2679	36	32.99	10.98	11.00

* New Specifications



© Made in Thailand



Symmetric pattern design, optimization of tire grounding mark shape, balanced force, avoid abnormal wear and tear, improve wear resistance.



Direction of tire rolling reinforcement design, and improve the pattern piece of rigid, is the tyres have stronger control performance.



Shoulder circumferential reinforcement design, tire shoulder decorative pattern design, improve the tire traction in soft ground conditions, improve the cross-country through performance of tire.

RIM	Size	Ply Rating	Load Index & Speed Symbols	Standard Rim	Standard Load	Inflated Pressure	Overall Diameter	Overall Width	Tread Depth
					lbs	psi	in	in	32nds
15	235/75R15 XL OWL*	/	109T	6 1/2J	2271	42	28.86	9.25	11.59
16	LT215/85R16*	10PR	115/112Q	6J	D 2470 S 2680	80	30.39	8.50	13.86
	LT225/75R16*	10PR	115/112Q	6J	D 2470 S 2680	80	29.29	8.78	13.86
	LT235/85R16 OWL*	10PR	120/116S	6 1/2J	D 2778 S 3042	80	31.73	9.25	13.86
	LT245/75R16 OWL	10PR	120/116Q	7J	D 2778 S 3042	80	30.47	9.76	15.37
	LT265/75R16 OWL*	10PR	123/120R	7 1/2J	D 3086 S 3417	80	31.65	10.51	14.99
	LT285/75R16 OWL*	10PR	126/123R	8J	D 3415 S 3750	80	32.83	11.26	16.00
	235/70R16 OWL*	/	106T	7J	2094	36	28.98	9.45	11.59
	245/70R16 XL OWL*	/	111T	7J	2403	42	29.53	9.76	12.98
	245/75R16*	/	111T	7J	2403	36	30.47	9.76	12.98
	255/70R16 OWL*	/	111S	7 1/2J	2403	36	30.08	10.24	12.98
	265/70R16 OWL	/	112T	8J	2469	36	30.63	10.71	12.98
17	265/75R16*	/	116T	7 1/2J	2756	36	31.65	10.51	12.98
	245/65R17 XL*	/	111T	7J	2403	42	29.53	9.76	13.00
	LT235/80R17*	10PR	120/117R	6 1/2J	D 2835 S 3085	80	31.81	9.25	13.86
	LT245/70R17 OWL	10PR	119/116Q	7J	D 2755 S 3000	80	30.55	9.76	14.99
	LT245/75R17	10PR	121/118R	7J	D 2910 S 3195	80	31.50	9.76	14.99
	LT265/70R17 OWL*	10PR	121/118R	8J	D 2910 S 3195	80	31.65	10.71	14.99
	265/65R17*	/	112T	8J	2469	36	30.55	10.71	12.98
18	265/70R17 OWL	/	115T	8J	2679	36	31.65	10.71	13.23
	LT275/65R18 OWL	10PR	123/120S	8J	D 3085 S 3415	80	32.09	10.98	14.99
	LT275/70R18*	10PR	125/122S	8J	D 3305 S 3640	80	33.19	10.98	14.99
	275/65R18 OWL*	/	116T	8J	2756	36	32.09	10.98	12.98

* New Specifications



PARALLER M/T




© Made in Thailand



The half - crescent pattern blocks provide a strong gravel traction.



The stepped groove wall, zigzag tire shoulder pattern blocks and tire shoulder decoration area provide strong traction on muddy road.



The enhanced tread side decoration and reinforcing bars corresponding to the pattern block protect the tread side from punctures and cuts on non-paved pavement.



Stiffeners prevent premature wear of gravel and trench bottoms.

RIM	Size	Ply Rating	Load Index & Speed Symbols	Standard Rim	Standard Load	Inflated Pressure	Overall Diameter	Overall Width	Tread Depth
					lbs				
15	265/70R15*	/	112Q	8J	2469	36	29.65	10.71	14.74
	265/75R15*	/	112Q	7 1/2J	2469	36	30.67	10.51	14.74
	30X9.50R15LT*	6PR	104Q	7 1/2J	1985	50	29.76	9.45	17.89
	31X10.50R15LT*	6PR	109Q	8 1/2J	2270	51	30.75	10.55	18.52
	33X12.50R15LT	6PR	108Q	10J	2205	36	32.76	12.52	18.52
	35X12.50R15LT*	6PR	113Q	10J	2535	35	34.76	12.52	18.52
	LT 215/75R15	6PR	100/97Q	6J	D 1610 S1765	50	29.1	8.2	17.26
	LT 235/75R15	6PR	104/101Q	6 1/2J	D 1820 S1985	50	29.09	9.25	17.26
16	205R16LT*	8PR	110/108Q	6J	D 2205/S 2335	65	29.13	8.19	17.26
	LT225/75R16*	8PR	110/107Q	6J	D 2150/S 2335	65	29.53	8.78	17.26
	LT235/85R16*	10PR	120/116Q	6 1/2J	D 2778/S 3042	80	31.97	9.25	17.26
	LT245/75R16*	10PR	120/116QQ	7J	D 2778/S 3042	80	30.71	9.76	17.26
	LT255/70R16*	8PR	115/112Q	7 1/2J	D 2470/S 2680	65	30.31	10.24	18.52
	LT265/70R16*	6PR	110/107Q	8J	D 2150/S 2335	50	30.87	10.71	18.14
	LT265/75R16	10PR	123/120Q	7 1/2J	D 3085/S 3415	80	31.89	10.51	18.52
	LT285/75R16	10PR	126/123Q	8J	D 3415/S 3750	80	33.07	11.26	18.52
	LT305/70R16	10PR	124/121Q	9J	D 3195/S 3525	65	33.07	12.24	19.91
	LT315/75R16*	10PR	127/124Q	8 1/2J	D 3525/S 3860	65	34.80	12.32	19.91
	LT375/65R16*	8PR	126/123Q	11J	D 3415/S 3750	50	35.43	15.04	19.91
	35X12.50R17LT*	10PR	121Q	10J	3195	65	34.76	12.52	18.52
17	37X12.50R17LT*	8PR	124Q	10J	3525	50	36.77	12.52	18.52
	40X13.50R17LT*	6PR	121Q	11J	3195	35	39.76	13.58	19.91
	LT235/80R17	10PR	120/117Q	6 1/2J	D 2835/S 3085	80	32.05	9.25	17.26
	LT265/65R17*	10PR	120/117Q	8J	D 2835/S 3085	80	30.79	10.71	18.52
	LT265/70R17	10PR	121/118Q	8J	D 2910/S 3195	80	31.89	10.71	18.52
	LT285/70R17	10PR	121/118Q	8 1/2J	D 2910/S 3195	80	32.99	11.50	18.52
	LT295/70R17*	10PR	121/118Q	8 1/2J	D 2910/S 3195	80	33.54	11.77	19.91
	LT305/65R17*	10PR	121/118Q	9J	D 2910/S 3195	65	32.83	12.24	19.91
	LT305/70R17*	8PR	119/116Q	9J	D 2755/S 3000	50	34.09	12.24	19.91
	LT315/70R17*	8PR	121/118Q	9 1/2J	D 2910/S 3195	50	34.65	12.72	19.91
	33X12.50R18LT	10PR	118Q	10J	2910	65	32.76	12.52	18.52
	35X12.50R18LT	10PR	123Q	10J	3415	65	34.76	12.52	18.52
18	37X13.50R18LT*	8PR	124Q	11J	3525	50	36.77	13.58	19.91
	LT275/70R18	10PR	125/122Q	8J	D 3305/S 3640	80	33.43	10.98	18.14
	LT295/70R18*	10PR	129/126Q	8 1/2J	D 3750/S 4080	80	34.53	11.77	19.91
	LT305/60R18*	10PR	121/118Q	9J	D 2910/S 3195	65	32.64	12.24	19.91
	LT305/70R18*	10PR	126/123Q	9J	D 3415/S 3750	65	35.08	12.24	19.91
	33X12.50R20LT	10PR	114Q	10J	2600	65	32.76	12.52	18.52
	35X12.50R20LT	10PR	121Q	10J	3195	65	34.76	12.52	18.52
20	36X15.50R20LT*	10PR	126Q	12 1/2J	3750	65	35.75	15.55	19.91
	37X13.50R20LT*	10PR	127Q	11J	3860	65	36.77	13.58	19.91
	38X15.50R20LT*	8PR	125Q	12 1/2J	3640	50	37.76	15.55	19.91
	40X14.50R20LT*	8PR	128Q	11 1/2J	3970	50	39.76	14.45	19.91
	LT285/55R20	10PR	122/119Q	9J	D 3000/S 3305	80	32.60	11.69	18.52
	LT285/65R20*	10PR	127/124Q	8 1/2J	D 3525/S 3860	80	34.80	11.50	18.52
	LT295/60R20*	10PR	126/123Q	8 1/2J	D 3415/S 3750	80	34.17	11.77	19.91
	33X12.50R22LT*	10PR	109Q	10J	2270	65	32.76	12.52	18.52
22	35X12.50R22LT*	10PR	117Q	10J	2835	65	34.76	12.52	18.52

* New Specifications

Trailer



F835

Special Trailer

1. Recommended for Trailer applications.
2. Variable angled tread pattern reduces stone retention.
3. Strong carcass materials help promote tire durability.
4. All steel radial tire.

© Made in China

Size	Load Index &Speed symbols	PR	Load Range	Rim	Max Load and Inflated Pressure				Overall Diameter (in)	Overall Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
ST235/85R16	132/127M	14	G	6 1/2J	3860	110	4400	110	31.34	9.25	11.2
ST235/80R16	129/125M	14	G	6.50	3640	110	4080	110	30.79	9.25	11.2
ST245/75R16	123/119M	10	E	7.00	3000	80	3420	80	30.47	9.76	14.0



AT R781

Trailer Tire

1. Ultra-wide tread design Increase the contact area with the ground and avoid the eccentric wear.
2. Popular size design Most popular size in USA market.
3. Big pattern design big pattern design guarantee theHigh performance on the bad road condition.
4. Economical tvre Lower weight with low cost.

© Made in China

Size	Ply Rating	Load Index & Speed Symbols	Standard Rim	Standard Load	Inflated Pressure	Overall Diameter (in)	Overall Width (in)	Tread Depth (32nds)
				lbs	psi			
ST175/80R13	6PR	91/87M	5J	1360/1200	50	24.02	6.97	7.94
ST205/75R14	6PR	100/96M	5.5J	1760/1570	50	26.14	7.99	7.94
ST215/75R14	6PR	102/98M	6J	1870/1650	50	27.13	7.99	7.94
ST205/75R15	6PR	101/97M	5.5J	1820/1610	50	27.13	7.99	7.94
ST205/75R15	8PR	107/102M	5.5J	2150/1870	65	26.69	8.50	7.94
ST225/75R15	8PR	113/108M	6J	2540/2200	65	28.31	8.78	7.94
ST225/75R15	10PR	117/112M	6J	2830/2470	80	28.31	8.78	7.94
ST235/80R16	10PR	123/119M	6.5J	3420/3000	80	30.79	9.25	7.94
ST235/85R16	10PR	125/121M	6.5J	3640/3200	80	31.73	9.25	7.94

A close-up, low-angle shot of a large truck tire and its multi-hole steel rim. The tire is dark and shows some wear. The rim is silver and has several black lug nuts. In the background, another similar wheel and part of the truck's chassis are visible, slightly out of focus.

TBR TIRE

© Made in Thailand



Long Haul



DRV-09

Radial Truck Tire (Long Haul)

- 1. Recommended for on-highway Long Haul and Regional drive applications.
- 2. Shoulder and center block design provides traction in all conditions.
- 3. Construction optimized for long service life.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
11R22.5	144/142M	14	G	8.25	5840	105	6175	105	41.93	10.98	27.7
11R22.5	146/143M	16	H	8.25	6005	120	6610	120	41.93	10.98	27.7
11R24.5	146/143M	14	G	8.25	6005	105	6610	105	43.94	10.98	27.7
11R24.5	149/146M	16	H	8.25	6610	120	7160	120	43.94	10.98	27.7
285/75R24.5	144/141M	14	G	8.25	5675	110	6175	110	41.81	11.14	27.7
285/75R24.5	147/144M	16	H	8.25	6175	120	6780	120	41.81	11.14	27.7
295/75R22.5	144/141M	14	G	9.00	5675	110	6175	110	40.39	11.73	27.7
295/75R22.5	146/143M	16	H	9.00	6005	120	6610	120	40.39	11.73	27.7



SMARTWAY

DRV-09e+

Radial Truck Tire (Long Haul)

- 1. Recommended for on-highway Long Haul and Regional drive applications.
- 2. Shoulder and center block design provides traction in all conditions.
- 3. Low rolling resistant to save fuel costs.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
295/75R22.5	144/141M	14	G	9.00	5675	110	6175	110	40.39	11.73	27.7
295/75R22.5	146/143M	16	H	9.00	6005	120	6610	120	40.39	11.73	27.7
11R22.5	144/142M	14	G	8.25	5840	105	6175	105	41.93	10.98	22.0
11R22.5	146/143M	16	H	8.25	6005	120	6610	120	41.93	10.98	22.0
11R24.5	146/143M	14	G	8.25	6005	105	6610	105	43.94	10.98	27.7
11R24.5	149/146M	16	H	8.25	6610	120	7160	120	43.94	10.98	27.7
285/75R24.5	144/141M	14	G	8.25	5675	110	6175	110	41.81	11.14	27.7
285/75R24.5	147/144M	16	H	8.25	6175	120	6780	120	41.81	11.14	27.7



STRD-09e+

Radial Truck Tire (Long Haul)

- 1.Recommended for long haul applications.
- 2.Decoupling groove in shoulder to control irregular wear.
- 3.Construction optimized for fuel economy and long tread life.

SMARTWAY

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
11R22.5	144/142M	14	G	8.25	5840	105	6175	105	41.50	10.98	18.3
11R22.5	146/143M	16	H	8.25	6005	120	6610	120	41.50	10.98	18.3
11R24.5	146/143M	14	G	8.25	6005	105	6610	105	43.46	10.98	18.3
11R24.5	149/146M	16	H	8.25	6610	120	7160	120	43.46	10.98	18.3
285/75R24.5	144/141M	14	G	8.25	5675	110	6175	110	41.34	11.14	18.3
285/75R24.5	147/144M	16	H	8.25	6175	120	6780	120	41.34	11.14	18.3
295/75R22.5	144/141M	14	G	9.00	5675	110	6175	110	39.92	11.73	18.3
295/75R22.5	146/143M	16	H	9.00	6005	120	6610	120	39.92	11.73	18.3



STRD-09e+ II

Radial Truck Tire for Highway(Long Haul)

- 1. Recommended for on-highway trailer applications.
- 2. Decoupling groove in shoulder to control irregular wear.
- 3. Wide footprint for long mileage.
- 4. Low rolling resistant to save fuel costs.

SMARTWAY

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
11R22.5	144/142M	14	G	8.25	5840	105	6175	105	41.34	10.98	12.0
11R22.5	146/143M	16	H	8.25	6005	120	6610	120	41.34	10.98	12.0
11R24.5	146/143M	14	G	8.25	6005	105	6610	105	43.46	10.98	12.0
11R24.5	149/146M	16	H	8.25	6610	120	7160	120	43.46	10.98	12.0
285/75R24.5	144/141M	14	G	8.25	5675	110	6175	110	41.34	11.14	12.0
285/75R24.5	147/144M	16	H	8.25	6175	120	6780	120	41.34	11.14	12.0
295/75R22.5	144/141M	14	G	9.00	5675	110	6175	110	39.92	11.73	12.6
295/75R22.5	146/143M	16	H	9.00	6005	120	6610	120	39.92	11.73	12.6



DRV-29e+

Radial Truck Tire (Long Haul)

- 1.Closed shoulder design helps promote uniform wear throughout the life of the tire.
- 2.Aggressive center lugs help to improve traction in wet or dry conditions for the life of the tread.
- 3.Optimized the footprint for long and even wear.
- 4.Strong carcass materials help promote tire durability and provide tire retreadability.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
11R22.5	144/142L	14	G	8.25	5840	105	6175	105	41.99	10.98	30
11R22.5	146/143L	16	H	8.25	6005	120	6610	120	41.99	10.98	30
11R24.5	146/143L	14	G	8.25	6005	105	6610	105	43.99	10.98	30
11R24.5	149/146L	16	H	8.25	6610	120	7160	120	43.99	10.98	30
285/75R24.5	144/141M	14	G	8.25	5675	110	6175	110	42.03	11.14	30
285/75R24.5	147/144L	16	H	8.25	6175	120	6780	120	42.03	11.14	30
295/75R22.5	144/141L	14	G	9.00	5675	110	6175	110	40.50	11.73	30
295/75R22.5	146/143L	16	H	9.00	6005	120	6610	120	40.50	11.73	30



STRD-09

Radial Truck Tire (Long Haul)

- 1.Recommended for Long Haul applications.
- 2.Decoupling groove in shoulder to control irregular wear.
- 3.Construction optimized for fuel economy and long tread life.

Size	Load Index& Speed symbols	PR	Load Range	Rim	Max Load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
11R22.5	144/142M	14	G	8.25	5840	105	6175	105	41.50	10.98	18.3
11R22.5	146/143M	16	H	8.25	6005	120	6610	120	41.50	10.98	18.3
11R24.5	146/143M	14	G	8.25	6005	105	6610	105	43.46	10.98	18.3
11R24.5	149/146M	16	H	8.25	6610	120	7160	120	43.46	10.98	18.3
285/75R24.5	144/141M	14	G	8.25	5675	110	6175	110	41.34	11.14	18.3
285/75R24.5	147/144M	16	H	8.25	6175	120	6780	120	41.34	11.14	18.3
295/75R22.5	144/141M	14	G	9.00	5675	110	6175	110	39.92	11.73	18.3
295/75R22.5	146/143M	16	H	9.00	6005	120	6610	120	39.92	11.73	18.3

Regional



STR-29e+

Radial Truck Tire (Regional)

- 1.Wide shoulder ribs reduce shoulder step wear.
- 2.Each size is manufactured with a specially tread depth to meet a greater range of application.
- 3.Optimized the footprint for long and even wear.
- 4.Strong carcass materials help promote tire durability and provide tire retreadability.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
11R22.5	144/142L	14	G	8.25	5840	105	6175	105	41.56	10.98	23.0
11R22.5	146/143L	16	H	8.25	6005	120	6610	120	41.56	10.98	23.0
11R24.5	146/143M	14	G	8.25	6005	105	6610	105	43.56	10.98	23.0
11R24.5	149/146L	16	H	8.25	6610	120	7160	120	43.56	10.98	23.0
255/70R22.5	138/134M	14	G	7.50	4675	110	5205	110	36.64	10.04	18.0
255/70R22.5	140/137L	16	H	7.50	5070	120	5510	120	36.64	10.04	18.0
285/75R24.5	144/141M	14	G	8.25	5675	110	6175	110	41.60	11.14	23.0
285/75R24.5	147/144L	16	H	8.25	6175	120	6780	120	41.60	11.14	23.0
295/75R22.5	144/141L	14	G	9.00	5675	110	6175	110	40.06	11.73	23.0
295/75R22.5	146/143L	16	H	9.00	6005	120	6610	120	40.06	11.73	23.0



AW-09

Radial Truck Tire (Regional)

- 1.Recommended for Regional and Pick Up/Delivery applications.
- 2.Construction optimized for long service life.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
205/75R17.5	124/122M	14	G	6.00	3305	109	3525	109	29.65	8.07	15.7
215/75R17.5*	135/133J	16	H	6.00	4540	123	4805	123	30.20	8.35	15.7
235/75R17.5*	143/141J	18	J	6.75	5675	127	6005	127	31.38	9.17	16.4
225/70R19.5	125/123M	12	F	6.75	3415	95	3640	95	31.93	8.90	15.7
225/70R19.5	128/126M	14	G	6.75	3750	110	3970	110	31.93	8.90	15.7
245/70R19.5	133/131M	14	G	7.50	4300	110	4540	110	33.03	9.76	16.4
245/70R19.5	135/133M	16	H	7.50	4540	120	4805	120	33.03	9.76	16.4
265/70R19.5	140/138M	16	H	7.50	5205	112	5510	112	34.13	10.31	17.0
285/70R19.5	150/148J	18	J	8.25	6940	130	7390	130	35.24	11.14	17.6
255/70R22.5	140/137M	16	H	7.50	5070	120	5510	120	36.61	10.04	17.6
275/70R22.5	148/145M	16	H	8.25	6395	130	6945	130	37.72	10.87	18.3

*Recommended for low platform trailer application



AP-100

Radial Truck Tire (Regional)

- 1.Recommended for Regional All Position applications.
- 2.Construction optimized for long service life.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
11R22.5	144/142M	14	G	8.25	5840	105	6175	105	41.50	10.98	18.3
11R22.5	146/143M	16	H	8.25	6005	120	6610	120	41.50	10.98	18.3
11R24.5	146/143M	14	G	8.25	6005	105	6610	105	43.46	10.98	18.3
11R24.5	149/146M	16	H	8.25	6610	120	7160	120	43.46	10.98	18.3
285/75R24.5	144/141M	14	G	8.25	5675	110	6175	110	41.34	11.14	18.3
285/75R24.5	147/144M	16	H	8.25	6175	120	6780	120	41.34	11.14	18.3
295/75R22.5	144/141M	14	G	9.00	5675	110	6175	110	39.92	11.73	18.3
295/75R22.5	146/143M	16	H	9.00	6005	120	6610	120	39.92	11.73	18.3



AP-100e+

Radial Truck Tire (Regional)

- 1. Recommended for Regional All Position applications.
- 2.Optimized for low rolling resistant to save fuel costs.

SMARTWAY

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
11R22.5	144/142M	14	G	8.25	5840	105	6175	105	41.50	10.98	18.3
11R22.5	146/143M	16	H	8.25	6005	120	6610	120	41.50	10.98	18.3
11R24.5	146/143M	14	G	8.25	6005	105	6610	105	43.46	10.98	18.3
11R24.5	149/146M	16	H	8.25	6610	120	7160	120	43.46	10.98	18.3
285/75R24.5	144/141M	14	G	8.25	5675	110	6175	110	41.34	11.14	18.3
285/75R24.5	147/144M	16	H	8.25	6175	120	6780	120	41.34	11.14	18.3
295/75R22.5	144/141M	14	G	9.00	5675	110	6175	110	39.92	11.73	18.3
295/75R22.5	146/143M	16	H	9.00	6005	120	6610	120	39.92	11.73	18.3



AP-100_x

Radial Truck Tire(Regional)

- 1.Recommended for low platform trailer applications.
- 2.Construction optimized for long service life.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
215/75R17.5	135/133J	16	H	6.00	4540	123	4805	123	30.2	8.31	18.3
235/75R17.5	143/141J	18	J	6.75	5675	127	6005	127	31.38	9.17	18.3
245/70R17.5	143/141J	18	J	7.50	5675	127	6005	127	31.06	9.76	18.3



AP-100_{II}

Radial Truck Tire (Regional)

- 1. Designed for on-highway heavy load applications.
- 2. Wide footprint for even weight distribution.
- 3. Tread design helps deliver all-season traction.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
12R22.5	152/149L	18	J	9.00	7160	135	7825	135	42.68	11.81	18.3
295/80R22.5	152/149M	18	J	9.00	7160	130	7830	130	41.10	11.73	18.3
315/80R22.5	154/151M	18	J	9.00	7610	120	8270	120	42.36	12.28	18.3
315/80R22.5	157/154L	20	L	9.00	8270	130	9090	130	42.36	12.28	18.3



SMARTWAY

AT08CCe+

Radial Truck Tire (Regional)

- 1.Recommended for regional applications.
- 2. Variable angled tread pattern reduces stone retention.
- 3. Tread pattern delivers lateral traction in all weather conditions.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
11R22.5	146/143K	16	H	8.25	6005	120	6610	120	41.50	10.98	18.9
11R24.5	149/146K	16	H	8.25	6610	120	7160	120	43.46	10.98	19.5



DRV-OS_{IX}

Radial Truck Tire (Regional)

- 1.Recommended for Regional and Pickup/Delivery drive applications.
- 2.Pattern provides durability, versatility, and wear.
- 3.Tread pattern provides traction in all weather conditions.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
225/70R19.5	128/126M	14	G	6.75	3750	110	3970	110	31.93	8.90	18.3
245/70R19.5	135/133L	16	H	7.50	4540	120	4805	120	33.03	9.76	19.5



DRV-OS

Radial Truck Tire (Regional)

- 1.Recommended for on-highway Long Haul and Regional drive applications.
- 2.Open Shoulder tread pattern delivers traction in all weather conditions.
- 3.Construction optimized for long service life.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
11R22.5	144/142L	14	G	8.25	5840	105	6175	105	41.69	10.98	25.8
11R22.5	146/143L	16	H	8.25	6005	120	6610	120	41.69	10.98	25.8
11R24.5	146/143L	14	G	8.25	6005	105	6610	105	43.70	10.98	25.8
11R24.5	149/146L	16	H	8.25	6610	120	7160	120	43.70	10.98	25.8
285/75R24.5	144/141M	14	G	8.25	5675	110	6175	110	41.57	11.14	25.8
285/75R24.5	147/144M	16	H	8.25	6175	120	6780	120	41.57	11.14	25.8
295/75R22.5	144/141M	14	G	9.00	5675	110	6175	110	40.16	11.73	25.8
295/75R22.5	146/143M	16	H	9.00	6005	120	6610	120	40.16	11.73	25.8



DRV-OS_V

Radial Truck Tire (Regional)

- 1.Recommended for on-highway Regional and Pickup/Delivery drive applications.
- 2.Wide circumferential grooves reduce hydroplaning.
- 3.Open Shoulder tread pattern delivers traction in all weather conditions.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
215/75R17.5	135/133L	16	H	6.00	4540	123	4805	123	30.2	8.35	18.9
235/75R17.5	143/141J	18	J	6.75	5675	127	6005	127	31.38	9.17	19.5
245/70R17.5	143/141J	18	J	7.50	5675	127	6005	127	31.06	9.76	22.7
225/70R19.5	125/123M	12	F	6.75	3415	95	3640	95	31.93	8.90	18.9
225/70R19.5	128/126M	14	G	6.75	3750	110	3970	110	31.93	8.90	18.9
245/70R19.5	133/131M	14	G	7.50	4300	110	4540	110	33.03	9.76	20.8
245/70R19.5	135/133M	16	H	7.50	4540	120	4805	120	33.03	9.76	20.8
285/70R19.5	150/148J	18	J	8.25	6940	130	7390	130	35.24	11.14	20.2



TR-09

Radial Truck Tire (Regional)

- 1.Recommended for on-highway Long Haul and Regional trailer applications.
- 2.Rounded shoulder reduces the effects of scrubbing during sharp turns.
- 3.Construction optimized for long service life.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
11R22.5	144/142M	14	G	8.25	5840	105	6175	105	41.34	10.98	13.5
11R22.5	146/143M	16	H	8.25	6005	120	6610	120	41.34	10.98	13.5
11R24.5	146/143M	14	G	8.25	6005	105	6610	105	43.46	10.98	13.5
11R24.5	149/146M	16	H	8.25	6610	120	7160	120	43.46	10.98	13.5
255/70R22.5	140/137M	16	H	7.50	5070	120	5510	120	36.61	10.04	13.5
285/75R24.5	144/141M	14	G	8.25	5675	110	6175	110	41.34	11.14	13.5
285/75R24.5	147/144M	16	H	8.25	6175	120	6780	120	41.34	11.14	13.5
295/75R22.5	144/141M	14	G	9.00	5675	110	6175	110	39.92	11.73	13.5
295/75R22.5	146/143M	16	H	9.00	6005	120	6610	120	39.92	11.73	13.5



APW093

Radial Truck Tire (Regional)

- 1.Recommended for Regional applications.
- 2.Zig-zag groove tread design reduces stone retention.
- 3.Tread pattern delivers lateral traction in all weather conditions.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
425/65R22.5	162K	18	J	12.25	/	/	10500	110	44.25	16.61	22.0
425/65R22.5	165J	20	L	12.25	/	/	11400	120	44.25	16.61	22.0



SMARTWAY

TR-09e+

Radial Truck Tire (Regional)

- 1.Recommended for on-highway Long Haul and Regional trailer applications.
- 2.Rounded shoulder reduces the effects of scrubbing during sharp turns.
- 3.Optimized for low rolling resistant to save fuel costs.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
11R22.5	144/142M	14	G	8.25	5840	105	6175	105	41.34	10.98	12.6
11R22.5	146/143M	16	H	8.25	6005	120	6610	120	41.34	10.98	12.6
11R24.5	146/143M	14	G	8.25	6005	105	6610	105	43.46	10.98	13.5
11R24.5	149/146M	16	H	8.25	6610	120	7160	120	43.46	10.98	13.5
295/75R22.5	144/141M	14	G	9.00	5675	110	6175	110	39.92	11.73	12.6
295/75R22.5	146/143M	16	H	9.00	6005	120	6610	120	39.92	11.73	12.6
285/75R24.5	144/141M	14	G	8.25	5675	110	6175	110	41.34	11.14	13.5
285/75R24.5	147/144M	16	H	8.25	6175	120	6780	120	41.34	11.14	13.5



APW092

Radial Truck Tire (Regional)

- 1.Recommended for Regional applications.
- 2.Zig-zag groove tread design reduces stone retention.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
385/65R22.5	158K	18	J	11.75	/	/	9370	120	42.20	15.31	20.8
385/65R22.5	160J	20	L	11.75	/	/	9920	130	42.20	15.31	20.8



Mixed Service



AT08CC

Radial Truck Tire (Mixed Service)

- 1.Recommended for Mixed Service applications.
- 2.Variable angled tread pattern reduces stone retention.
- 3.Tread pattern delivers lateral traction in all weather conditions.

Size	Load Index& Speed symbols	PR	Load Range	Rim	Max Load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
7.50R16LT	122/118M	14	G	6.00G	2910	112	3305	112	31.69	8.46	15.7
7.50R16LT	120/116M	12	F	6.00G	2755	97	3085	97	31.69	8.46	15.7
8.25R16LT	126/122L	14	G	6.50H	3305	97	3705	97	33.66	9.25	17.0
8.25R16LT	128/124L	16	H	6.50H	3525	112	3970	112	33.66	9.25	17.0
9.00R20	144/142K	16	H	7.0	5840	130	6175	130	40.12	10.20	18.9
10.00R20	146/143K	16	H	7.5	6005	120	6610	120	41.50	10.94	19.5
10.00R20	149/146K	18	J	7.5	6610	135	7160	135	41.50	10.94	19.5
11.00R20	150/147K	16	H	8.0	6780	120	7390	120	42.72	11.54	20.8
11.00R20	152/149K	18	J	8.0	7160	135	7830	135	42.72	11.54	20.8
12.00R20	154/151K	18	J	8.5	7610	120	8270	120	44.29	12.40	20.8
11R22.5	146/143K	16	H	8.25	6005	120	6610	120	41.50	10.98	18.9
11R24.5	149/146K	16	H	8.25	6610	120	7160	120	43.46	10.98	20.8
12R22.5	152/149K	16	H	9.00	7160	135	7825	135	42.68	11.81	21.4
12.00R24	158/155K	18	J	8.5	8540	120	9370	120	48.27	12.32	21.4
12.00R24	160/156K	20	L	8.5	8815	123	9915	123	48.27	12.32	21.4
315/80R22.5	157/154K	20	L	9.00	8270	130	9090	130	42.13	12.28	22.0
255/70R22.5	140/137M	16	H	7.50	5070	120	5510	120	36.61	10.04	16.0



AP-09,

Radial Truck Tire (Mixed Service)

- 1.Recommended for Mixed Service applications.
- 2.Pattern provides durability, versatility, and wear.
- 3.Provides good traction in a variety of conditions.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
10.00R20	146/143K	16	H	7.5	6005	120	6610	120	41.50	10.94	20.2
10.00R20	149/146K	18	J	7.5	6610	135	7160	135	41.50	10.94	20.2
11R22.5	146/143M	16	H	8.25	6005	120	6610	120	41.73	10.98	23.9



APW095

Radial Truck Tire (Mixed Service)

- 1.Recommended for Mixed Service applications.
- 2.Designed for heavy loads and rough road conditions.
- 3.Tread pattern delivers traction in all weather conditions.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
385/65R22.5	160K	20	L	11.75	/	/	9920	130	42.20	15.31	20.8
425/65R22.5	165K	20	L	12.25	/	/	11400	120	44.25	16.61	22.0
445/65R22.5	168K	20	L	13.00	/	/	12300	120	45.28	17.48	22.7



DRV-MIII

Radial Truck Tire (Mixed Service)

- 1.Recommended for Mixed Service drive applications.
- 2.Heavy lugs optimized for cut, tear and puncture resistance.
- 3.Reinforced bead enhances load capability.
- 4.New Tread compound for resistance to cuts, chips and tearing.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
11R22.5	146/143J	16	H	8.25	6005	120	6610	120	41.50	10.98	24.6
275/80R22.5	149/146J	16	H	8.25	6610	123	7160	123	39.84	10.87	24.6
295/80R22.5	150/147F	16	H	9.00	6780	120	7390	120	41.10	11.73	24.6
295/80R22.5	152/148F	16	H	9.00	6945	123	7825	123	41.10	11.73	24.6



DRV-MIV

Radial Truck Tire (Mixed Service)

- 1.Recommended for Mixed Service applications.
- 2.Variable angled tread pattern reduces stone retention.
- 3.Reinforced bead enhances load capability.
- 4.New Tread compaund for resistance to cuts, chips and tearing.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
295/80R22.5	152/148F	16	H	9.00	6945	123	7825	123	41.34	11.73	27.7
295/80R22.5	152/149F	18	J	9.00	7160	130	7830	130	41.34	11.73	27.7



DRV-950

Radial Truck Tire (Logging)

- 1.Recommended for Short Haul Logging drive applications.
- 2.Designed for durability and long service life.
- 3.Provides excellent traction in a variety of conditions and surfaces.
- 4.Cut resistance compound.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
11R22.5	146/143K	16	H	8.25	6005	120	6610	120	41.93	10.98	29.0
11R24.5	149/146G	16	H	8.25	6610	120	7160	120	43.94	10.98	31.4
11R24.5	149/146F	16	H	8.25	6610	120	7160	120	43.94	10.98	31.4



DRV-960

Radial Truck Tire (Mixed Service)

- 1.Recommended for Mixed Service drive applications.
- 2.Deep and rigid block design provides traction in all conditions.
- 3.Cut resistance compound.

Size	Load Index & Speed Symbols	PR	Load Range	Rim	Max load and Max Air				Overall Diameter (in)	Section Width (in)	Tread Depth (32nds)
					Dual		Single				
					lbs	psi	lbs	psi			
12.00R24	158/155K	18	J	8.5	8540	120	9370	120	48.27	12.32	26.5
12.00R24	160/156K	20	L	8.5	8815	123	9915	123	48.27	12.32	26.5

A large red dump truck is shown from a low angle, driving through a deep, muddy trench. The truck's multiple heavy-duty tires are prominent, with some showing significant tread. The truck's body is red, and its suspension and mechanical components are visible. The ground is dark, wet mud, and the scene is lit with warm, golden light, suggesting a sunset or sunrise. The text "SPECIALTY TIRE" is overlaid in large, white, bold letters across the center of the image.

SPECIALTY TIRE

Radial OTR

Dump Truck



LMS401

Radial OTR
Exceptional traction
Massive tread blocks characterise this tyre, it delivers excellent tractive performance, better lateral adhesion and more efficient loading for machines working at the face.
Good self cleaning
Flower chimb angle changed design, it delivers good self cleaning.
Operating comfort
A wide, square tread gives better stability in loading operations and whilst travelling.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Width (in)	Overall Diameter (in)	Tread Depth (32nds)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (lbs)	Inflated Pressure (psi)	LOAD 10km/h Speed Symbol A2 (lbs)	Inflated Pressure (psi)			
23.5R25	☆☆	185	201	19.5/2.5	20400	69	32000	87	23.5	65.9	64.3
26.5R25	☆☆	193	209	22.00/3.0	25400	69	40800	87	26.5	71.0	70.6
29.5R25	☆☆	200	216	25.00/3.5	30900	69	49400	87	29.5	76.0	76.9



LB02S

Radial OTR
1.Exceptional traction and manoeuvrability.
2.Good flotation.
3.Excellent stability and comfort.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Width (in)	Overall Diameter (in)	Tread Depth (32nds)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (lbs)	Inflated Pressure (psi)	LOAD 10km/h Speed Symbol A2 (lbs)	Inflated Pressure (psi)			
18.00R33	☆☆	191	209	13.00/2.5	24000	94	40800	116	19.6	74.0	66.8



LB03S

Radial OTR

- 1.High safty.
- 2.Wide contact area with ground provides strong grip.
- 3.Low noise.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Width (in)	Overall Diameter (in)	Tread Depth (32nds)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (lbs)	Inflated Pressure (psi)	LOAD 10km/h Speed Symbol A2 (lbs)	Inflated Pressure (psi)			
16.00R25	☆☆	177	195	11.25/2.0	16100	94	26800	116	17.0	61.0	52.9
18.00R25	☆☆	185	204	13.00/2.5	20400	94	35300	116	19.6	65.9	58.0



LB06S

Radial OTR

- 1.Good traction and wear resistance.
- 2.Excellent tear resistance.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Width (in)	Overall Diameter (in)	Tread Depth (32nds)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (lbs)	Inflated Pressure (psi)	LOAD 10km/h Speed Symbol A2 (lbs)	Inflated Pressure (psi)			
750/65R25	☆☆	190	/	24.00/3.0	23400	62	40800	91	29.7	63.4	56.7
26.5R25	☆☆	193	209	22.00/3.0	25400	69	40800	87	26.5	69.0	55.4
29.5R25	☆☆	200	216	25.00/3.5	30900	69	49400	87	29.6	73.8	55.4



DM992

Radial OTR

- 1.Long life.
- 2.Excellent adhension and traction in bad conditions.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Width (in)	Overall Diameter (in)	Tread Depth (32nds)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (lbs)	Inflated Pressure (psi)	LOAD 10km/h Speed Symbol A2 (lbs)	Inflated Pressure (psi)			
14.00R25	☆☆☆	169	188	10.00	/	101	/	138	14.8	54.0	55.4



DM992+

Radial OTR

- 1.Long life.
- 2.Excellent adhension and traction in bad conditions.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Width (in)	Overall Diameter (in)	Tread Depth (32nds)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (lbs)	Inflated Pressure (psi)	LOAD 10km/h Speed Symbol A2 (lbs)	Inflated Pressure (psi)			
13.00R25	☆☆☆	163	182	8.50	10800	101	18700	138	13.8	51.2	32.8
14.00R24	☆☆☆	169	188	10.00	12800	101	22100	138	14.8	53.9	32.8



DO993(E-3)

Radial OTR(Short Haul)

- 1.Good traction resistance.
- 2.Chip,cut and abrasion resistance tread compound.
- 3.Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Width (in)	Overall Diameter (in)	Tread Depth (32nds)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (lbs)	Inflated Pressure (psi)	LOAD 10km/h Speed Symbol A2 (lbs)	Inflated Pressure (psi)			
13.00R25	☆☆☆	163	182	8.50	10800	101	18700	138	13.8	51.2	37.8
14.00R24	☆☆☆	169	188	10.00	12800	101	22100	138	14.8	53.9	37.8
14.00R25	☆☆☆	169	188	10.00	12800	101	22100	138	14.8	54.0	37.8



DO993+(E-3)

Radial OTR(Short Haul)

- 1.Good traction resistance.
- 2.Chip,cut and abrasion resistance tread compound.
- 3.Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Width (in)	Overall Diameter (in)	Tread Depth (32nds)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (lbs)	Inflated Pressure (psi)	LOAD 10km/h Speed Symbol A2 (lbs)	Inflated Pressure (psi)			
13.00R25	☆☆☆	163	182	8.50	10800	101	18700	138	13.8	51.2	37.8
14.00R24	☆☆☆	169	188	10.00	12800	101	22100	138	14.8	53.9	37.8
14.00R25	☆☆☆	169	188	10.00	12800	101	22100	138	14.8	54.0	37.8

Loader



LM01N

Radial OTR

- 1.Exceptional traction and manoeuvrability.
- 2.Good flotation.
- 3.Excellent stability and comfort.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Width (in)	Overall Diameter (in)	Tread Depth (32nds)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (lbs)	Inflated Pressure (psi)	LOAD 10km/h Speed Symbol A2 (lbs)	Inflated Pressure (psi)			
23.5R25	☆☆	185	201	19.5/2.5	20400	69	32000	87	23.5	63.7	38.4



LB01N

Radial OTR

- 1.Exceptional traction and manoeuvrability.
- 2.Good flotation.
- 3.Excellent stability and comfort.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Width (in)	Overall Diameter (in)	Tread Depth (32nds)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (lbs)	Inflated Pressure (psi)	LOAD 10km/h Speed Symbol A2 (lbs)	Inflated Pressure (psi)			
17.5R25	☆☆	167	182	14.00/1.5	12000	69	18700	87	17.5	53.1	34.0
20.5R25	☆☆	177	193	17.00/2.0	16100	69	25400	87	20.5	58.8	37.8
23.5R25	☆☆	185	201	19.5/2.5	20400	69	32000	87	23.5	63.7	41.6
26.5R25	☆☆	193	209	22.00/3.0	25400	69	40800	87	26.5	69.0	45.4
29.5R25	☆☆	200	216	25.00/3.5	30900	69	49400	87	29.6	73.8	49.1



LB03SD(L-5)

Radial OTR

Exceptionally robust in masacre conditions
A substantial crown, robust shoulders reinforced with a protection band make up a tyre particularly resistant to shock ruptures, cuts and tread tearing.
A particularly resilient casing with the addition of several specific steel belts constitute a tyre that is very resistant to punctures.
Excellent compromise of adhesion and traction
A very substantial, wide and aggressive tread functions perfectly to produce a good compromise between adhesion,traction and damage resistance.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Width (in)	Overall Diameter (in)	Tread Depth (32nds)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (lbs)	Inflated Pressure (psi)	LOAD 10km/h Speed Symbol A2 (lbs)	Inflated Pressure (psi)			
17.5R25	☆☆	167	182	14.00/1.5	12000	69	18700	87	17.5	55.1	80.6
20.5R25	☆☆	177	193	17.00/2.0	16100	69	25400	87	20.5	61.0	89.5
23.5R25	☆☆	185	201	19.5/2.5	20400	69	32000	87	23.5	65.9	97.7
26.5R25	☆☆	193	209	22.00/3.0	25400	69	40800	87	26.5	70.8	109.0
29.5R25	☆☆	200	216	25.00/3.5	30900	69	49400	87	29.6	75.7	118.4



LB02SD(L-5)

Radial OTR

Exceptional traction
Massive tread blocks characterise this tyre.
High Efficiency
The extra deep tread pattern (L5) of this tyre gives outstanding wear life potential
The sidewall/tread intersection design gives an excellent level of damage and cut resistance
Operating comfort
A wide, square tread gives better stability in loading operations and whilst travelling
A directional pattern.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Width (in)	Overall Diameter (in)	Tread Depth (32nds)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (lbs)	Inflated Pressure (psi)	LOAD 10km/h Speed Symbol A2 (lbs)	Inflated Pressure (psi)			
20.5R25	☆☆	177	193	17.00/2.0	16100	69	25400	87	20.5	61.0	89.5
23.5R25	☆☆	185	201	19.5/2.5	20400	69	32000	87	23.5	65.9	97.7
26.5R25	☆☆	193	209	22.00/3.0	25400	69	40800	87	26.5	70.8	109.0
29.5R25	☆☆	200	216	25.00/3.5	30900	69	49400	87	29.6	75.7	118.4



LB06S

Radial OTR

- 1.Good traction and wear resistance.
- 2.Excellent tear resistance.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Width (in)	Overall Diameter (in)	Tread Depth (32nds)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (lbs)	Inflated Pressure (psi)	LOAD 10km/h Speed Symbol A2 (lbs)	Inflated Pressure (psi)			
750/65R25	☆☆	190	/	24.00/3.0	23400	62	40800	91	29.7	63.4	56.7

Sand



LD702(E-7)

Radial OTR

- 1.Good traction and wear resistance.
- 2.Excellent tear resistance.

Size	Ply Rating	Load Index	Speed Symbol	Rim	Load Capacity (lbs)	Inflated Pressure (psi)	Overall Width (in)	Overall Diameter (in)	Tread Depth (32nds)
24R20.5	☆ /16PR	176	F	18.00	15700	87	23.6	54.0	27.7

Mobile Crane



LM11N

Radial OTR
1.Exceptional traction and manoeuvreability.
2.Good flotation.
3.Excellent stability and comfort.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (lbs)	Inflated Pressure (psi)	Overall Width (in)	Overall Diameter (in)	Tread Depth (32nds)
445/95R25	☆☆	177	E	11.25/2.0	16100	131	17.0	58.3	29.0
385/95R25	☆☆	170	E	10.00/1.5	13200	131	15.0	54.0	26.5

Off Road



D990

Radial OTR
1.Good traction and wear resistance.
2.Excellent tear resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (lbs)	Inflated Pressure (psi)	Overall Width (in)	Overall Diameter (in)	Tread Depth (32nds)
16.00R20	22PR	174/171	F	11.25	14800/13600	110	17.2	52.0	24.6

Snow Field



LSN201(E-2/L-2)

Radial OTR (Snow Works)
1.Good traction resistance.
2.Chip,cut and abrasion resistance tread compound.
3.Suitable for snow work.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY				Overall Width (in)	Overall Diameter (in)	Tread Depth (32nds)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (lbs)	Inflated Pressure (psi)	LOAD 10km/h Speed Symbol B (lbs)	Inflated Pressure (psi)			
15.5R25	☆☆	160	176	12.00/1.3	9900	69	15600	87	15.5	50.3	31.5
17.5R25	☆☆	167	182	14.00/1.5	11990	69	18700	87	17.5	53.1	35.3
20.5R25	☆☆	177	193	17.00/2.0	16060	69	25300	87	20.5	58.7	40.3
23.5R25	☆☆	185	201	19.50/2.5	20400	69	31900	87	23.5	63.7	41.6
26.5R25	☆☆	193	209	22.00/3.0	25300	69	40700	87	26.5	68.9	45.4



Bias OTR

Dump Truck



EM01(E-3)

OTR Tire

- 1.Deep tread pattern ensure tyre life.
- 2.Wider tread blocks enhance traction performance.
- 3.Special compound design ,low heat-generation,excellent wear and tear resistance.
- 4.Available for large rigid dump trucks.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		50km/h		Overall Width	Overall Diameter	Tread Depth	Type
					Max. Load	Inflated Pressure	Max. Load	Inflated Pressure				
					lbs	psi	lbs	psi			32nds	
13.00-25*	28	/	/	8.50/1.3	20400	152	10700	102	13.8	51.2	37.8	TT
14.00-24	28	/	/	10.0	22000	134	12300	94	14.8	53.9	40.3	TT
14.00-25	36	/	/	10.00/1.5	25400	174	14300	123	14.8	53.9	40.3	TT

* New Specifications



LL42(E-3)

OTR Tire

- 1.Available for large rigid dump trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		50km/h		Overall Width	Overall Diameter	Tread Depth	Type
					Max. Load	Inflated Pressure	Max. Load	Inflated Pressure				
					lbs	psi	lbs	psi			32nds	
14.00-24	28	/	/	10.0	22000	134	12300	94	14.8	53.9	34.0	TT
14.00-25	36	/	/	10.00/1.5	23700	160	12100	123	14.8	53.9	34.0	TT



LL131(E-3)

OTR Tire
1.Available for large rigid dump trucks.
2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		50km/h		Overall Width	Overall Diameter	Tread Depth	Type
					Max. Load	Inflated Pressure	Max. Load	Inflated Pressure				
					lbs	psi	lbs	psi			32nds	
13.00-25	28	/	/	8.50	/	/	696	103	13.2	51.2	30.9	TT



LL56(E-3)

OTR Tire
1.Available for large self-dumping trucks.
2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		50km/h		Overall Width	Overall Diameter	Tread Depth	Type
					Max. Load	Inflated Pressure	Max. Load	Inflated Pressure				
					lbs	psi	lbs	psi			32nds	
18.00-25	32	/	/	13.00/2.5	33100	109	19300	83	19.7	63.6	37.8	TT
18.00-25	36	/	/	13.00/2.5	35300	123	20400	91	19.7	63.6	37.8	TT



LL26(E-3)

OTR Tire
1.Available for large self-dumping trucks.
2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		50km/h		Overall Width	Overall Diameter	Tread Depth	Type
					Max. Load	Inflated Pressure	Max. Load	Inflated Pressure				
					lbs	psi	lbs	psi			32nds	
18.00-25	32	/	/	13.00/2.5	33100	109	19300	83	19.7	63.6	37.8	TT/TL
18.00-25	40	/	/	13.00/2.5	37500	138	21500	102	19.7	63.6	37.8	TT/TL



LL90(E-4)

OTR Tire
1.Available for large self-dumping trucks.
2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		50km/h		Overall Width	Overall Diameter	Tread Depth	Type
					Max. Load	Inflated Pressure	Max. Load	Inflated Pressure				
					lbs	psi	lbs	psi			32nds	
18.00-33	32	/	/	13.00	38600	109	22000	83	19.7	73.8	63.0	TL
18.00-33	36	/	/	13.00	40800	123	23300	91	19.7	73.8	63.0	TL
18.00-33	40	/	/	13.00	43000	138	24700	102	19.7	73.8	63.0	TL



E-4

OTR Tire
1.Available for large self-dumping trucks.
2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		50km/h		Overall Width	Overall Diameter	Tread Depth	Type
					Max. Load	Inflated Pressure	Max. Load	Inflated Pressure				
					lbs	psi	lbs	psi			32nds	
21.00-33	32	/	/	15.00/3.0	/	/	22700	73	22.4	76.4	52.9	TL
21.00-33	42	/	/	15.00/3.0	/	/	27100	100	22.4	76.4	52.9	TL



E-4

OTR Tire
1.Available for large self-dumping trucks.
2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		50km/h		Overall Width	Overall Diameter	Tread Depth	Type
					Max. Load	Inflated Pressure	Max. Load	Inflated Pressure			32nds	
					lbs	psi	lbs	psi			in	
21.00-35	32	/	/	15.00/3.0	46700	94	26800	73	22.4	80.7	52.9	TL
21.00-35	36	/	/	15.00/3.0	50700	109	28300	80	22.4	80.7	52.9	TL
21.00-35	40	/	/	15.00/3.0	53600	120	30900	91	22.4	80.7	52.9	TL



EM02(E-4)

OTR Tire
1.Available for large self-dumping trucks.
2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		50km/h		Overall Width	Overall Diameter	Tread Depth	Type
					Max. Load	Inflated Pressure	Max. Load	Inflated Pressure			32nds	
					lbs	psi	lbs	psi			in	
21.00-35	40	/	/	15.00/3.0	53600	120	30900	91	22.4	80.7	75.6	TL
24.00-35	42	/	/	17.00/3.5	64000	109	36400	80	25.8	85.6	75.6	TL



LL25(E-3)

OTR Tire
1.Available for large rigid dump trucks.
2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		50km/h		Overall Width	Overall Diameter	Tread Depth	Type
					Max. Load	Inflated Pressure	Max. Load	Inflated Pressure			32nds	
					lbs	psi	lbs	psi			in	
16.00-25	28	/	/	11.25/2.0	25400	109	14700	83	16.9	58.9	35.9	TT/TL
16.00-25	32	/	/	11.25/2.0	27600	127	16100	94	16.9	58.9	35.9	TT/TL
16.00-25	36	/	/	11.25/2.0	30000	141	17000	105	16.9	58.9	35.9	TT



Underground Work



LSM402

OTR Tire

- 1.Special tread compound design, High wear resistance performance.
- 2.Wide tread arc and deep pattern design, Increase tyre life.
- 3.Sole sidewall protection design, Enhance puncture resistance performance.
- 4.Novel appearance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
9.00-20	14	/	A2	7.0	9650	105	10.0	40.0	44.1	TT
9.00-20	16	/	A2	7.0	10500	120	10.0	40.0	44.1	TT
10.00-20*	14	/	A2	7.5	7150	98	10.9	42.2	56.7	TT
10.00-20*	16	/	A2	7.5	7800	112	10.9	42.2	56.7	TT
12.00-20*	18	/	A2	8.5	12800	113	12.4	46.3	75.6	TT
12.00-20*	20	/	A2	8.5	13600	123	12.4	46.3	75.6	TT
12.00-24	16	/	A2	8.5	13600	98	12.4	49.0	69.3	TT
12.00-24	18	/	A2	8.5	14300	109	12.4	49.0	69.3	TT
12.00-24	20	/	A2	8.5	15200	120	12.4	49.0	69.3	TT
12.00-24	24	/	A2	8.5	16500	141	12.4	49.0	69.3	TT
14.00-24	28	/	A2	10.0	22000	134	14.8	55.9	81.9	TT
14.00-24	32	/	A2	10.0	24000	152	14.8	55.9	81.9	TT
17.5-25	20	/	A2	14.00/1.5	18200	83	15.6	53.1	81.9	TT
17.5-25	32	/	A2	14.00/1.5	25800	120	15.6	53.1	81.9	TT
18.00-25	32	/	A2	13.00/2.5	33100	109	19.5	63.6	107.1	TL
18.00-25	40	/	A2	13.00/2.5	37500	138	19.5	63.6	107.1	TL

* New Specifications



LSM401(L-4S)

OTR Tire

- 1.Available for loaders operating under seriously tough service conditions in tunnels.
- 2.Excellent wear and cut resistance.
- 3.Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
10.00-20	14	/	A2	7.5	7150	98	10.9	42.2	44.1	TT
10.00-20	16	/	A2	7.5	7800	112	10.9	42.2	44.1	TT



LSM401(L-4S+)

OTR Tire

- 1.Available for loaders operating under seriously tough service conditions in tunnels.
- 2.Excellent wear and cut resistance.
- 3.Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
10.00-20	14	/	A2	7.5	7150	98	10.9	42.2	56.7	TT
10.00-20	16	/	A2	7.5	7800	112	10.9	42.2	56.7	TT



LL25(E-3/L-3)

OTR Tire

- 1.Available for loaders and dozers.
- 2.Wear and puncture resistance.
- 3.Wide application.

Loader

Size	Ply Rating	Rim	10km/h		50km/h		Overall Width	Overall Diameter	Tread Depth	Type
			lbs	psi	Max. Load (lbs)	Inflated Pressure (psi)	in	in	32nds	
15.5-25	12	12.00/1.3	12300	58	7150	36	15.6	50.2	31.5	TL
17.5-25	12	14.00/15	13600	51	8050	33	17.5	53.1	32.1	TT/TL
17.5-25	16	14.00/15	16100	69	9350	44	17.5	53.1	32.1	TT/TL
20.5-25	16	17.00/2.0	18200	51	12000	40	20.5	58.7	35.9	TT/TL
20.5-25	20	17.00/2.0	20900	65	13200	47	20.5	58.7	35.9	TT/TL
23.5-25	16	19.50/2.5	20900	44	13600	33	23.4	63.6	39.7	TT/TL
23.5-25	18	19.50/2.5	22700	51	14800	40	23.4	63.6	39.7	TT
23.5-25	20	19.50/2.5	24000	54	16100	44	23.4	63.6	39.7	TT/TL
23.5-25	24	19.50/2.5	27600	69	17600	51	23.4	63.6	39.7	TT
26.5-25	20	22.00/3.0	29100	51	18200	36	26.6	68.9	44.1	TT
26.5-25	24	22.00/3.0	30900	58	20400	44	26.6	68.9	44.1	TL
26.5-25	28	22.00/3.0	34200	69	22000	51	26.6	68.9	44.1	TT/TL
29.5-25	28	25.00/3.5	38600	62	25400	47	29.5	73.8	50.4	TL



LL136(E-3/L-3)

OTR Tire

- 1.Specialized pattern for sand and other soft surfaces.
- 2.High side-skid resistance and traction.
- 3.Excellent in self-cleaning,handling stability and driving comfot.
- 4.Larger contact area offers even wear and long life.

Size	Ply Rating	Rim	10km/h		50km/h		Overall Width	Overall Diameter	Tread Depth	Type
			lbs	psi	Max. Load (lbs)	Inflated Pressure (psi)	in	in	32nds	
23.5-25	16	19.50/2.5	20900	44	13600	33	23.4	63.6	39.7	TT



E-3/L-3

OTR Tire

- 1.Suitable for heavy loaders used on bad road condition of mine,stone pit and tunnel,etc.
- 2.Good impale and wear resistance.

Size	Ply Rating	Rim	10km/h		50km/h		Overall Width	Overall Diameter	Tread Depth	Type
			lbs	psi	Max.Load (lbs)	Inflated Pressure (psi)	in	in	32nds	
29.5-29	28	25.00/3.5	41900	62	26800	47.0	29.5	77.8	50.4	TL



LL55(E-3)

OTR Tire

- 1.Available for loaders and dozers.
- 2.Wear and puncture resistance.
- 3.Wide application.

Size	Ply Rating	Rim	10km/h		50km/h		Overall Width	Overall Diameter	Tread Depth	Type
			lbs	psi	Max. Load (lbs)	Inflated Pressure (psi)	in	in	32nds	
16/70-20	10	13	9100	47	5200	36	16.1	42.3	25.2	TT
16/70-20	14	13	11400	65	11400	65	16.1	42.3	25.2	TT



L301(E-3+)

OTR Tire

- 1.Deepen the pattern design, increase the service life of the tire.
- 2.Large tread pattern block design, uniform tread wear.
- 3.Special mine formula, anti cutting, anti tearing, super abrasion resistance.

Size	Ply Rating	Rim	10km/h		50km/h		Overall Width	Overall Diameter	Tread Depth	Type
			lbs	psi	Max. Load (lbs)	Inflated Pressure (psi)	in	in	32nds	
17.5-25	12	14.00/15	13600	51	8050	33	17.5	53.1	45.4	TT
23.5-25	16	19.50/2.5	20900	44	13600	33	23.4	63.6	56.7	TT



LP401(IND-4)

Port Tire

- 1.Extra deep tread pattern ensure tyre life.
- 2.Wider tread blocks enhance traction performance.
- 3.Special compound design for ports,low heat-generation,excellent wear and tear resistance.

Port

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
14.00-24	28	/	A2	10.0	29800	145	14.8	55.9	66.8	TT
16.00-25	36	/	A2	11.25/2.0	40800	145	16.9	61.0	84.4	TL
18.00-25*	40	/	A2	13.00/2.5	50700	145	19.7	65.9	84.4	TL

* New Specifications



EM03(E-4)

Port Tire

- 1.Deep tread pattern ensure tyre life.
- 2.Wider tread blocks enhance traction performance.
- 3.Special compound design ,low heat-generation,excellent wear and tear resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
12.00-24	24	/	A2	8.5	16500	141	12.4	50.2	50.4	TT



LP402(IND-3)

Port Tire

- 1.Extra deep tread pattern ensure tyre life.
- 2.Wider tread blocks enhance traction performance.
- 3.Special compound design for ports,low heat-generation,excellent wear and tear resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
18.00-25	44	/	A2	13.00/2.5	53600	145	19.7	65.9	55.4	TL
21.00-25	40	/	A2	15.00/3.0	60000	145	22.4	68.9	55.4	TL



G-2

OTR Tire

- 1.Good steer and traction.
- 2.Off-road pattern has self-cleaning performance and comfort.

Size	Ply Rating	Rim	10km/h		40km/h		Overall Width	Overall Diameter	Tread Depth	Type
			Max. Load (lbs)	Inflated Pressure (psi)	Max. Load (lbs)	Inflated Pressure (psi)	in	in	32nds	
13.00-24	12	8.00TG	12300	65	600	44	13.2	50.4	30.2	TL
13.00-24	18	8.00TG	14800	98	7600	65	13.2	50.4	30.2	TL
14.00-24	12	8.00TG	13900	62	6800	40	14.2	53.1	30.2	TT/TL
14.00-24	16	8.00TG	161400	80	8050	51	14.2	53.1	30.2	TT/TL



LG201(G-2)

OTR Tire

- 1.Good steer and traction.
- 2.Off-road pattern has self-cleaning performance and comfort.

Size	Ply Rating	Rim	10km/h		40km/h		Overall Width	Overall Diameter	Tread Depth	Type
			Max. Load (lbs)	Inflated Pressure (psi)	Max. Load (lbs)	Inflated Pressure (psi)	in	in	32nds	
16.00-24	12	11.25/2.5	15700	47	80050	33	16.9	58.7	35.9	TT
16.00-24	16	11.25/2.5	18200	62	9900	36	16.9	58.7	35.9	TT
16.00-24	20	11.25/2.5	20400	76	12000	61	16.9	58.7	35.9	TT



E2/L2

OTR Tire

- 1.Good steer and traction.
- 2.Off-road pattern has self-cleaning performance and comfort.

Size	Ply Rating	Rim	10km/h		40km/h		Overall Width	Overall Diameter	Tread Depth	Type
			Max. Load (lbs)	Inflated Pressure (psi)	Max.Load (lbs)	Inflated Pressure (psi)	in	in	32nds	
15.5-25	12	12.00/1.3	12300	58	7150	36	15.6	50.2	30.2	TL
17.5-25	12	14.00/1.5	13600	51	8050	33	17.5	53.1	32.1	TT/TL
17.5-25	16	14.00/1.5	16100	69	9350	44	17.5	53.1	32.1	TT/TL
20.5-25	16	17.00/2.0	18200	51	12000	40	20.5	58.7	35.9	TT/TL
20.5-25	20	17.00/2.0	20900	65	13200	47	20.5	58.7	35.9	TT/TL
23.5-25	16	19.50/2.5	20900	44	113600	33	23.4	63.6	39.7	TT/TL
23.5-25	20	19.50/2.5	24000	54	16100	44	23.4	63.6	39.7	TT/TL
23.5-25	24	19.50/2.5	27600	69	17600	51	23.4	63.6	39.7	TT



LC101

OTR Tire

- 1.Available for loaders operating under seriously tough service conditions in tunnels.
- 2.Excellent wear and cut resistance.
- 3.Flat and smooth tread improves the puncture resistance to stone.4.Lateral grip.

Size	Ply Rating	Rim	10km/h		Overall Width	Overall Diameter	Type
			lbs	psi	in	in	
13/80-20	16	9.0	11700	116	12.8	41.1	TT



LL66A

OTR Tire

- 1.Available for loaders operating under seriously tough service conditions in tunnels.
- 2.Excellent wear and cut resistance.
- 3.Flat and smooth tread improves the puncture resistance to stone.4.Lateral grip.

Size	Ply Rating	Rim	10km/h		Overall Width	Overall Diameter	Type
			lbs	psi	in	in	
7.50-16	14	6.00G	5200	102	8.5	31.9	TT
12.00-24	16	8.5	13600	98	12.4	49.0	TT
12.00-24	18	8.5	14300	109	12.4	49.0	TT
12.00-24	20	8.5	15200	120	12.4	49.0	TT



LL66B

OTR Tire

- 1.Available for loaders operating under seriously tough service conditions in tunnels.
- 2.Excellent wear and cut resistance.
- 3.Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Rim	10km/h		Overall Width	Overall Diameter	Type
			lbs	psi	in	in	
9.00-20	14	7.0	9650	105	10.0	40.0	TT



LL39

Industrial Tire

- 1.Good wear and crack resistance.
- 2.Lateral grip.

Industrial

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
18×7-8NHS	16	/	/	4.33R	3615	145	6.8	18.3	20.2	TT
6.50-10NHS	10	/	/	5.00F	3650	115	6.8	23.2	18.9	TT
6.50-10NHS	14	/	/	5.00F	4355	155	6.8	23.2	19.8	TT
7.00-15NHS	12	/	/	5.50S	6395	125	7.6	28.9	25.2	TT
28X9-15NHS 8.15-15NHS	12	/	/	7.0	7120	120	8.5	27.7	20.2	TT
28×9-15NHS	14	/	/	7.0	6725	140	8.6	27.9	16.4	TT



LL45

Industrial Tire

- 1.Good wear and side slip resistance.
- 2.Stable performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
5.00-8NHS	6	/	/	3.50D	1875	85	5.4	18.5	15.1	TT
5.00-8NHS	10	/	/	3.50D	2535	145	5.4	18.5	15.1	TT
6.00-9NHS	10	/	/	4.00E	3320	125	6.3	21.5	12.6	TT
6.50-10NHS	10	/	/	5.00F	3650	115	6.8	23.2	18.9	TT
7.00-9NHS	10	/	/	5.00S	4400	125	7.5	23.2	15.1	TT
7.00-12NHS	12	/	/	5.00S	5235	125	7.5	26.6	15.1	TT
7.50-15NHS	14	/	/	6.0	7440	135	8.5	30.7	22.6	TT
8.25-12NHS	12	/	/	6.5	6745	105	9.2	30.1	15.1	TT
8.25-15NHS	14	/	/	6.5	8320	120	9.2	33.1	18.8	TT
8.25-15NHS	18	/	/	6.5	9345	145	9.2	33.1	18.8	TT
9.00-16NHS	14	/	/	6.50H	9910	110	10.0	35.0	20.1	TT



LL65

Industrial Tire

- 1.Wear and crack resistance.
- 2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
10.00-15NHS	14	/	/	7.5	6170	110	11.0	36.8	15.1	TT



LL102

Industrial Tire

- 1.Wear and crack resistance.
- 2.Low rolling resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
10-16.5NHS	10	/	/	8.25	4705	75	10.3	30.4	16.3	TL
10-16.5NHS	12	/	/	8.25	5325	90	10.3	30.4	16.3	TL
12-16.5NHS	12	/	/	9.75	6315	80	12.0	32.7	16.3	TL



LL103

Industrial Tire

- 1.Wear and crack resistance.
- 2.Low rolling resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
12-16.5LT	10	/	/	9.75	D3125 S3560	60	12.0	32.7	16.3	TL
12-16.5LT	12	/	/	9.75	D3635 S4080	75	12.0	32.7	16.3	TL



LL2

Industrial Tire

- 1.Good wear and crack resistance.
- 2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
9.00-16NHS	14	/	/	6.50H	8995	105	10.0	35.0	15.7	TT
9.00-16NHS	14	/	/	6.50H	5215	105	10.0	35.0	15.7	TT



LF401

Industrial Tire

- 1.Wear resistance compound，High wear resistance performance. Increase tyre life.
- 2.Deep pattern design and wide tread arc， Enhance self-cleaning performance.
- 3.Variational pattern design， Novel appearance.
- 4.New stamping design.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
18X7-8NHS	16	/	/	4.33R	3615	145	6.8	18.3	22.6	TT
5.00-8NHS	10	/	/	3.50D	2535	145	5.4	18.5	18.9	TT
6.00-9NHS	10	/	/	4.00E	3320	125	6.3	21.5	18.9	TT
6.50-10NHS	10	/	/	5.00F	3650	115	6.8	23.2	20.1	TT
7.00-12NHS	12	/	/	5.00S	5235	125	7.5	26.6	26.5	TT
28X9-15NHS (8.15-15)	14	/	/	7.0	6725	140	8.6	27.9	22.6	TT
8.25-15NHS	14	/	/	6.5	8320	120	9.2	33.1	28.9	TT
250-15NHS	18	/	/	7.5	9060	150	9.8	28.9	29.6	TT
300-15NHS	18	/	/	8.0	12200	120	11.8	33.1	29.6	TT
7.50-16NHS	12	/	/	6.00G	7045	115	8.5	31.7	27.7	TT
9.00-20NHS	16	/	/	7.0	11500	110	10.1	40.1	32.5	TT



LD701

- 1.Available for gravel road.
- 2.Good delivery performance.
- 3.Low rolling resistance and good heat dissipation.
- 4.Lateral grip.

Size	Ply Rating	Rim	50km/h		Overall Width	Overall Diameter	Tread Depth	Type
			Max.Load (lbs)	Inflated Pressure (psi)	in	in	32nds	
18-20	14	14.00T	10200	52	17.9	42.9	20.2	TT/TL
20-20	16	14.00T	13200	52	19.9	46.5	21.4	TL
22-20	14	17.0	9100	41	21.9	42.3	22.7	TL



LL200

- 1.Available for gravel road.
- 2.Good delivery performance.
- 3.Low rolling resistance and good heat dissipation.
- 4.Lateral grip.

Size	Ply Rating	Rim	50km/h		Overall Width	Overall Diameter	Tread Depth	Type
			Max.Load (lbs)	Inflated Pressure (psi)	in	in	32nds	
9.00-15	8	5.50F	2090	36	9.3	33.1	10.1	TT
9.00-16	8	6.50H	2090	36	9.6	35.0	10.1	TT
14.00-20	20	10.00W	5840	50	14.8	48.0	10.71	TT

Tractors



LR861(R-1W)

Radial Agricultural Tire

- 1.Better traction and braking performance.
- 2.Save work time and fuel.
- 3.Better running stability.
- 4.Suitable for modern mechanical equipment

Radial Agricultural Tire

Size	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth
				lbs	psi	in	in	32nds
280/85R24	115/112	A8/B	W9 W10	2680	23.2	11.1	42.8	49.1
320/85R24	122/119	A8/B	W9 W10 W11	3300	23.2	12.6	45.4	51.7
320/85R28	124/121	A8/B	W9 W10 W11	3520	23.2	12.6	49.4	51.7
320/85R32	126/123	A8/B	W9 W10 W11	3740	23.2	12.6	53.4	51.7
320/85R32	142/139	A8/B	W9 W10 W11	5840	58.0	12.6	53.4	51.7
320/85R36	128/125	A8/B	W9 W10 W11	3960	23.2	12.6	57.4	51.7
340/85R24	125/122	A8/B	W11 W12	3640	23.2	13.5	46.8	52.9
340/85R28	127/124	A8/B	W11 W12	3860	23.2	13.5	50.7	52.9
340/85R32	142/139	A8/B	W11 W12	5840	51.5	13.5	54.8	52.9
340/85R36	132/129	A8/B	W11 W12	4400	23.2	13.5	58.7	52.9
340/85R38	133/130	A8/B	W11 W12	4540	23.2	13.5	60.7	52.9
380/85R24	131/128	A8/B	W11 W12 W13	4300	23.2	15.0	49.4	56.7
380/85R28	133/130	A8/B	W11 W12 W13	4540	23.2	15.0	53.4	56.7
380/85R30	135/132	A8/B	W11 W12 W13	4800	23.2	15.0	55.4	56.7
380/85R34	137/137	A8/B	W11 W12 W13	5080	23.2	15.0	59.4	56.7
380/85R34	147/147	A8/B	W11 W12 W13	6800	34.8	15.0	59.4	56.7
420/85R24	137/134	A8/B	W13 W14L W15L	5080	23.2	16.5	52.1	60.5
420/85R28	139/136	A8/B	W13 W14L W15L	5360	23.2	16.5	56.1	60.5
420/85R30	140/137	A8/B	W13 W14L W15L	5520	23.2	16.5	58.1	60.5
420/85R34	142/139	A8/B	W13 W14L W15L	5840	23.2	16.5	62.1	60.5
420/85R38	144/141	A8/B	W13 W14L W15L	6150	23.2	16.5	66.1	60.5
460/85R30	145/142	A8/B	W14L W15L W16L	6400	23.2	17.9	60.8	64.3
460/85R34	147/144	A8/B	W14L W15L W16L	6800	23.2	17.9	64.8	64.3
460/85R38	149/146	A8/B	W14L W15L W16L	7150	23.2	17.9	68.8	64.3
460/85R42	150/147	A8/B	W14L W15L W16L	7400	23.2	17.9	72.8	64.3
460/85R46	152/149	A8/B	W14L	7850	23.2	18.3	76.5	64.3
460/85R46	158/155	A8/B	W14L	9350	34.8	18.3	76.5	64.3
520/85R38	155/152	A8/B	DW16L DW18L	8550	23.2	20.3	72.8	68.0
520/85R42	157/154	A8/B	DW16L DW18L	9100	23.2	20.3	76.8	68.0
520/85R42	167/164	A8/B	DW16L DW18L	12000	46.4	20.3	76.8	68.0
420/80R46	145/142	A8/B	W12 W13	6400	23.2	16.5	72.4	59.2
420/80R46	151/148	A8/B	W12 W13	7600	34.8	16.5	72.4	59.2
480/80R42	151/151	A8/B	DD16L DW16L W16L DW16A* W16A*	7600	23.2	18.9	72.2	61.7
480/80R42	156/156	A8/B	DD16L DW16L W16L DW16A* W16A*	8800	34.8	18.9	72.2	61.7
480/80R46	158/158	A8/B	DD16L DW16L W16L DW16A* W16A*	9350	34.8	18.9	76.2	61.7
420/90R30	142/139	A8/B	DW13 W14L	5840	23.2	16.5	59.8	60.5
420/90R30	147/144	A8/B	DW13 W14L	6800	34.8	16.5	59.8	60.5
320/90R46(R-1)	146/143	A8/B	W9 W10 W11	6600	46.4	12.6	68.7	46.6
320/90R46(R-1)	148/148	A8/B	W9 W10 W11	6950	52.2	12.6	68.7	46.6
380/90R46	149/149	A8/B	W11 W12 W13	7150	34.8	15.0	72.9	56.7
380/90R46	157/157	A8/B	W11 W12 W13	9100	52.2	15.0	72.9	56.7



LR650(R-1W)

Radial Agricultural Tire

- 1.Longer service life.
- 2.Excellent stability and comfort.
- 3.More efficient traction.
- 4.Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth
				lbs	psi	in	in	32nds
440/65R24	128/131	D/A8	W13 W14L W15L	3960	23.2	17.4	46.5	56.7
440/65R28	131/134	D/A8	W13 W14L W15L	4300	23.2	17.4	50.5	56.7
480/65R24	133/136	D/A8	W14L W15L	4540	23.2	18.9	43.6	58.0
480/65R28	136/139	D/A8	W14L W15L	4940	23.2	18.9	52.6	58.0
540/65R24	140/143	D/A8	W16L W18L	5520	23.2	21.7	51.7	60.5
540/65R28	142/145	D/A8	W16L W18L	5840	23.2	21.7	55.6	60.5
540/65R30	150/153	D/A8	W16L W18L	7400	34.8	21.7	57.6	60.5
540/65R34	145/148	D/A8	W16L W18L	6400	23.2	21.7	61.7	60.5
540/65R38	153/156	D/A8	W16L W18L	8050	34.8	21.7	65.6	60.5
600/65R28	147/150	D/A8	DW20B W18L	6800	23.2	23.3	58.7	65.5
600/65R34	157/160	D/A8	DW20B W18L	9100	34.8	23.3	64.7	65.5
600/65R38	153/156	D/A8	DW20B W18L	8050	23.2	23.3	68.7	65.5
650/65R38	157/160	D/A8	DW20B	9100	23.2	25.4	71.3	70.6
650/65R42	165/168	D/A8	DW20B	11400	34.8	25.4	75.3	70.6
710/70R38	166/169	D/A8	DW23B	11700	23.2	28.2	77.1	71.8
710/70R42	168/171	D/A8	DW23B	12300	23.2	28.2	81.1	71.8
710/70R42	173/176	D/A8	DW23B	14300	34.8	28.2	81.1	71.8



LR700(R-1W)

Radial Agricultural Tire

- 1.Saving time and fuel.
- 2.Better self-cleaning capability.
- 3.Comfort on the road and in the field.

Size	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth
				lbs	psi	in	in	32nds
360/70R24	122/119	A8/B	W10 W11 W12	3300	22.9	14.1	45.4	52.9
360/70R24	127/124	A8/B	W10 W11 W12	3860	34.4	14.1	45.4	52.9
380/70R24	125/125	A8/B	W11 W12 W13	3640	22.9	15.0	46.9	54.2
420/70R24	130/127	A8/B	W12 W13 W14L	4180	22.9	16.5	49.1	55.4
420/70R24	136/133	A8/B	W12 W13 W14L	4940	34.4	16.5	49.1	55.4
420/70R28	133/130	A8/B	W12 W13 W14L	4540	22.9	16.5	53.1	55.4
420/70R28	139/136	A8/B	W12 W13 W14L	5360	34.4	16.5	53.1	55.4
480/70R24	138/135	A8/B	W14L W15L W16L	5200	22.9	18.9	51.8	59.2
480/70R28	140/137	A8/B	W14L W15L W16L	5520	22.9	18.9	55.9	59.2
480/70R28	145/142	A8/B	W14L W15L W16L	6400	34.4	18.9	55.9	59.2
480/70R28	151/148	A8/B	W14L W15L W16L	7600	45.8	18.9	55.9	59.2
480/70R34	143/143	A8/B	W14L W15L W16L	6000	22.9	18.9	62.2	59.2
480/70R38	145/142	A8/B	W14L W15L W16L	6400	22.9	18.9	66.2	59.2
520/70R38	150/150	A8/B	W15L W16L W18L	7400	22.9	20.3	68.9	60.5
580/70R38	155/155	A8/B	W18L	8550	22.9	22.7	71.9	63.0
580/70R38	170/167	A8/B	W18L	13200	40.1	22.7	71.9	63.0

Harvesters



LR8000(R-1W)

Radial Agricultural Tire

- 1.Longer service life.
- 2.Excellent stability and comfort.
- 3.More efficient traction.
- 4.Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth
				lbs	psi	in	in	32nds
800/65R32	167	D	DW25B DW27B DH27B	12000	23.2	31.4	73.0	73.0
800/65R32	172	D	DW25B DW27B DH27B	13900	34.8	31.4	73.0	73.0
800/65R32	178	D	DW25B DW27B DH27B	16500	46.4	31.4	73.0	73.0
800/65R32	181/181	A8/B	DW25B DW27B DH27B	18200	52.2	31.4	73.0	73.0



LR7000(R-1W)

Radial Agricultural Tire

- 1.Up to 10% load
- 2.Enhance bead strength
- 3.Longer service life.
- 4.Excellent stability and comfort.
- 5.More efficient traction.
- 6.Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth
				lbs	psi	in	in	32nds
600/70R28	157	D	DW18L DW20B W18L	9100	34.8	23.3	61.1	66.1
600/70R28	161/161	A8/B	DW18L DW20B W18L	10200	40.6	23.3	61.1	66.1
600/70R30	152	D	DW18L DW20B W18L	7850	23.2	23.3	63.1	66.1
600/70R30	158	D	DW18L DW20B W18L	9350	34.8	23.3	63.1	66.1
650/85R38	173/176	D/A8	DW20B DW21B DW23B	14300	34.8	25.4	81.5	81.9

Sprayers



LR861(R-1W)

Radial Agricultural Tire

- 1.Better traction and braking performance.
- 2.Better running stability.
- 3.Suitable for modern mechanical equipment.

Size	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth
				lbs	psi	in	in	32nds
320/90R46(R-1)	146/143	A8/B	W9 W10 W11	6600	46.4	12.6	68.7	46.6
320/90R46(R-1)	148/148	A8/B	W9 W10 W11	6950	52.2	12.6	68.7	46.6
340/85R38	133/130	A8/B	W11 W12	4540	23.2	13.5	60.7	52.9
380/90R46	149/149	A8/B	W11 W12 W13	7150	34.8	15.0	72.9	56.7
380/90R46	157/157	A8/B	W11 W12 W13	9100	52.2	15.0	72.9	56.7



LR9000(R-1W)

Radial Agricultural Tire

- 1.Better traction and braking performance.
- 2.Better running stability.
- 3.Suitable for modern mechanical equipment.

Size	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth
				lbs	psi	in	in	32nds
380/90R50	151/151	A8/B	W11 W12 W13	7600	34.8	15.0	76.9	60.5
380/90R50	160/157	A8/B	W11 W12 W13	9900	58.0	15.0	76.9	60.5

Trailers



LBI301

Radial Agricultural Tire

- 1.Steel belted.
- 2.Wear and puncture resistance.
- 3.Good grip and self-cleaning performance.

Size	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth
				lbs	psi	in	in	32nds
600/50R22.5IMP	159	D	AG20.00	9650	58.0	24.1	46.1	31.5
650/65R30.5IMP*	176	D	AG20.00	15700	58.0	25.4	63.8	40.3
850/50R30.5IMP*	182	D	AG28.00	18700	58.0	33.9	64.0	40.3

* New Specifications



FL300

- 1.Steel belted construction
- 2.Good wear resistance.
- 3.Good ride-comfort performance.

Size	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth
				lbs	psi	in	in	32nds
500/60R22.5	155	D	AG16.00	8550	58.0	19.8	46.1	22.7
560/60R22.5	165	D	AG16.00 16.00 17.00 AG20.00	11400	73.0	21.4	49.0	22.7
560/45R22.5	152	D	AG16.00	7850	58.0	21.4	42.4	22.7
600/55R26.5	165	D	AG20.00	11400	58.0	24.1	52.5	25.2
650/55R26.5	169	D	AG20.00	12800	58.0	25.4	54.7	30.2
710/50R26.5	170	D	AG20.00 AG24.00	13200	58.0	28.6	54.4	30.2
710/50R30.5	173	D	AG20.00 AG24.00	14300	58.0	28.6	58.5	32.8

Compact line



LR451

Radial Agricultural Tire

- 1.Increase traction performance.
- 2.Enhance shoulder wear and cut resistance performance.
- 3.Enhance tread wear resistance performance.

Size	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth
				lbs	psi	in	in	32nds
460/70R24 IND	152/152	A8/B	DW14L DW15L DW16L	7850	46.0	17.9	49.4	45.4
460/70R24 IND	159/159	A8/B	DW14L DW15L DW16L	9650	58.0	17.9	49.4	45.4
500/70R24 IND	164/164	A8/B	DW16L DW15L	11000	58.0	20.1	51.3	49.1



LR400

Radial Agricultural Tire

- 1.Increase traction performance.
- 2.Enhance shoulder wear and cut resistance performance.
- 3.Enhance tread wear resistance performance.

Size	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth
				lbs	psi	in	in	32nds
500/70R24 IND	164/164	A8/B	DW16L DW15L	11000	58.0	20.1	51.3	35.3
400/70R18 IND	147/147	A8/B	13.00	6800	58.0	15.9	40.0	29.0
400/70R20 IND	149/149	A8/B	13.00	7150	58.0	15.9	42.0	29.0
405/70R18	141/153	B/A2	13	5680	55.0	16.0	40.4	29.0
405/70R20	143/155	B/A2	13	6000	55.0	16.0	42.4	29.0



Bias Agricultural Tire

Tractor Steering Wheel



LL30

Agricultural Tire
1.Lateral grip and wear resistance.
2.Good traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
4.00-12	6	/	A6	3.00D	530	52	4.3	21.1	12.6	TT
4.00-14	4	/	A6	3.00D	595	49	4.3	23.2	12.6	TT
4.00-14	6	/	A6	3.00D	770	58	4.3	23.2	12.6	TT
4.00-16	6	/	A6	3.00D	1765	58	4.3	25.2	12.6	TT
4.50-14	8	/	A6	3.00D	2205	65	4.7	23.7	12.6	TT
4.50-16	6	/	A6	3.00D	1355	52	4.8	25.8	12.6	TT
4.50-16	8	/	A6	3.00D	2205	65	4.8	25.8	12.6	TT
5.00-14	8	/	A6	3.00D	1100	65	5.1	24.4	15.1	TT
5.00-15	8	/	A6	4.00E	1490	65	5.5	26.2	12.6	TT
6.00-16	6	/	A6	4.50E	1090	36	6.5	29.3	16.4	TT
6.50-20	8	/	A6	5.00F	1905	61	7.1	33.9	20.2	TT



LBF201

Agricultural Tire
1.Lateral grip and wear resistance.
2.Good traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
5.50-16	6	/	A6	4.00E	1155	54	5.9	28.0	18.9	TT

Tractor Drive Wheel



LL31

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
5.00-12	4	/	A6	4.00E	615	29	5.7	23.2	27.7	TT
5.50-17	6	/	A6	4.00E	970	36	5.7	29.5	27.7	TT
6.00-12	4	/	A6	4.50E	740	26	6.5	25.2	27.7	TT
6.00-12	6	/	A6	4.50E	895	36	6.5	25.2	27.7	TT
6.00-12	8	/	A6	4.50E	925	38	6.5	25.2	27.7	TT
6.00-14	6	/	A6	4.50E	990	36	6.5	27.2	25.8	TT
6.00-14	8	/	A6	4.50E	1510	61	6.5	27.2	25.8	TT
6.00-16	6	/	A6	4.50E	1090	36	6.5	29.3	27.7	TT
7.50-16	6	/	A6	5.50F	1435	30	8.1	31.9	29.0	TT
7.50-16	8	/	A6	5.50F	1545	35	8.1	31.9	29.0	TT
7.50-20	6	/	A6	5.50F	1675	30	8.1	35.8	30.2	TT
7.50-20	8	/	A6	5.50F	1940	41	8.1	35.8	30.2	TT
8.3-24	6	/	A6	W7	1785	35	8.3	39.2	37.8	TT
8.3-24	8	/	A6	W7	2030	41	8.3	39.2	37.8	TT
8.5-20	8	/	A6	W7	1940	36	8.3	35.2	37.8	TT
9.5-20	8	/	A6	W8	2105	41	9.4	37.4	37.8	TT
9.5-24	6	/	A6	W8	2070	30	9.4	41.3	37.8	TT
9.5-24	8	/	A6	W8	2445	41	9.4	41.3	37.8	TT
10-15	8	/	A6	9.00	2095	45	10.0	30.5	25.2	TT
11.2-24	6	/	A6	W10	2095	26	11.2	43.5	44.1	TT
11.2-24	8	/	A6	W10	2535	36	11.2	43.5	44.1	TT
12-38	8	/	A6	DW11	3460	20	13.0	62.0	44.1	TT
12.4/11-28	6	/	A6	W11	2810	24	12.4	49.6	47.9	TT
12.4/11-28	8	/	A6	W11	3330	34	12.4	49.6	47.9	TT
14.9-24	6	/	A6	W13	3330	20	14.9	49.8	47.9	TT
14.9-24	8	/	A6	W13	3880	26	14.9	49.8	47.9	TT
14.9-28	6	/	A6	W13	3550	20	14.9	53.7	47.9	TT
14.9-28	8	/	A6	W13	4145	26	14.9	53.7	47.9	TT
16.9-34	8	/	A6	W15L	5245	24	16.9	62.4	46.6	TT
16.9-34	10	/	A6	W15L	5745	29	16.9	62.4	46.6	TT



LL32

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
5.50-16	10	/	A6	4.00E	2920	77	5.9	28.1	20.2	TT
6.00-16	6	/	A6	4.50E	1090	36	6.5	29.3	22.7	TT
6.00-16	10	/	A6	4.50E	1665	61	6.5	29.3	22.7	TT
6.50-16	10	/	A6	5.00F	1400	44	7.1	30.1	22.7	TT
6.50-16	14	/	A6	5.00F	1795	67	7.1	30.1	22.7	TT
7.00-16	14	/	A6	5.50F	2225	67	7.5	30.9	22.7	TT
7.50-16	10	/	A6	5.50F	1765	46	8.1	31.9	25.2	TT
7.50-16	14	/	A6	5.50F	2270	67	8.1	31.9	25.2	TT



LL37

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
7.50-20	6	/	A6	5.50F	1675	30	8.1	35.8	30.2	TT
7.50-20	8	/	A6	5.50F	1940	41	8.1	35.8	30.2	TT
910x205	16	/	A6	5.50F	4190	100	8.1	35.8	30.2	TT



LL46

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
15-24	10	/	A6	DW14	6175	41	16.1	52.4	41.6	TT
16.9-28	8	/	A6	W15L	4795	24	16.9	56.5	49.1	TT
16.9-30	8	/	A6	W15L	4950	24	16.9	58.5	49.1	TT
16.9-30	10	/	A6	W15L	5410	29	16.9	58.5	49.1	TT



LBR102

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
14.9-28	8	/	A6	W13	4145	26	14.9	53.7	46.6	TT



LL76

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
23.1-26	12	/	/	DW20	7960	24	23.1	63.2	52.9	TT



LBR103

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
23.1-26	10	/	A8	DW20	6395	20	23.1	63.2	52.9	TT
23.1-26	12	/	A6	DW20	7165	24	23.1	63.2	52.9	TT
23.1-26	14	/	A8	DW20	7825	28	23.1	63.2	52.9	TT
23.1-30	10	/	A8	DW20	6780	20	23.1	67.2	52.9	TT
23.1-30	12	/	A8	DW20	7605	24	23.1	67.2	52.9	TT
23.1-30	16	/	A6	DW20	9085	34	23.1	67.2	52.9	TT



LBR105

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
9.5/10.00-28	8	/	A6	W9	2865	35	10.8	49.0	44.1	TT

Tractor Driving
Wheel Paddy Field



R-2

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
19.5L-24	10	/	A6	17.00	6175	24	19.5	54.4	115.9	TT
28L-26	14	/	A6	DW25	9360	24	28.1	65.8	126.0	TT
23.1-26	12	/	A6	DW20	7960	24	23.1	65.4	126.0	TT



PR-1

Agricultural Tire

Special for paddy field.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
6.50-16	6	/	/	5.00F	1245	36	6.5	32.7	75.6	TT
7.50-16	8	/	/	5.50F	1545	35	7.7	35.0	88.2	TT
8.3-20	8	/	/	W7	1675	41	8.3	37.4	94.5	TT
8.3-24	8	/	/	W7	2810	48	8.3	41.3	94.5	TT
9.5-24	8	/	/	W8	3330	41	9.4	45.3	100.8	TT
11.2-24	8	/	/	W10	3750	39	11.2	47.4	107.1	TT
11/12.4-28	10	/	/	W11	4520	34	12.4	50.9	113.4	TT
14.9-30	10	/	/	W13	4830	34	14.9	55.7	113.4	TT
11-32	8	/	/	W10	2780	30	12.0	57.5	107.1	TT
16.9-34	10	/	/	W15L	5745	29	16.9	62.4	113.4	TT

Implement



LL2

Agricultural Tire

- 1.Wear and crack resistance.
- 2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
4.00-8	4	/	/	3.00D	395	49	4.3	16.7	8.2	TT
4.00-8	6	/	/	3.00D	905	61	4.3	16.7	8.2	TT
4.00-8	8	/	/	3.00D	1545	77	4.3	16.7	8.2	TT
4.00-12	6	/	/	3.00D	530	52	4.4	21.1	9.4	TT
4.00-14	6	/	/	3.00D	770	58	4.4	23.2	10.1	TT
7.00-16	10	/	/	5.50F	2425	77	7.4	29.9	15.1	TT
7.00-16	12	/	/	5.50F	2690	91	7.4	29.9	15.1	TT
7.00-16	14	/	/	5.50F	2910	106	7.4	29.9	15.1	TT



LL11

Agricultural Tire
1.Good wear and crack resistance.
2.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
6.50-16	10	/	/	5.50F	2150	77	7.3	29.5	12.6	TT
6.50-16	12	/	/	5.50F	2335	91	7.3	29.5	12.6	TT
7.00-16	10	/	/	5.50F	2425	77	7.4	29.9	15.1	TT
7.00-16	12	/	/	5.50F	2690	91	7.4	29.9	15.1	TT
7.00-16	14	/	/	5.50F	2910	106	7.4	29.9	15.1	TT



LL15

Agricultural Tire
1.Wear and crack resistance.
2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
4.00-16	6	/	/	3.00D	2765	58	4.3	25.2	10.1	TT
6.00-16	6	/	/	4.50E	1400	46	6.7	28.7	11.3	TT
6.00-16	8	/	/	4.50E	1620	61	6.7	28.7	11.3	TT
6.00-16	10	/	/	4.50E	1895	77	6.7	28.7	11.3	TT
6.50-16	10	/	/	5.50F	2150	77	7.3	29.5	12.6	TT
6.50-16	12	/	/	5.50F	2335	91	7.3	29.5	12.6	TT
7.50-16	14	/	/	6.00G	3305	106	8.5	31.7	16.4	TT



LL14

Agricultural Tire
1.Wear resistance and lateral grip.
2.Multiple functions.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
5.00-16	8	/	/	3.00D	2645	87	5.1	25.8	10.1	TT
5.00-16	10	/	/	3.00D	2975	94	5.1	25.8	10.1	TT
5.50-16	8	/	/	4.00E	2425	68	5.9	27.0	10.1	TT
6.50-16	10	/	/	5.50F	2150	77	7.3	29.5	13.2	TT
6.50-16	12	/	/	5.50F	2335	91	7.3	29.5	13.2	TT



LL17

Agricultural Tire
1.Wear and crack resistance.
2.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
4.50-14	8	/	/	3.00D	2205	65	4.7	23.7	10.1	TT



LL19

Agricultural Tire

- 1.Fuel saving.
- 2.Good wear resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
5.50-14	8	/	/	3.00D	1310	56	6.2	25.0	11.3	TT



LL27

Agricultural Tire

Multiple functions.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
4.50-14	8	/	/	3.00D	2205	65	4.7	23.7	10.1	TT
5.50-16	8	/	/	4.00E	2425	68	5.9	27.0	10.1	TT
5.50-16	10	/	/	4.00E	2920	77	5.9	27.0	10.1	TT



LL21

Agricultural Tire

- 1.Wear and crack resistance.
- 2.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
4.50-12	8	/	/	3.00B	915	58	5.0	21.5	8.8	TT



LL29

Agricultural Tire

Multiple functions.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
4.50-16	6	/	/	3.00D	1355	52	4.8	25.8	10.1	TT
4.50-16	8	/	/	3.00D	2205	65	4.8	25.8	10.1	TT
4.50-16	10	/	/	3.00D	2920	77	4.8	25.8	10.1	TT
5.00-14	8	/	/	3.00D	2645	77	5.1	24.4	10.1	TT



LL38

Agricultural Tire
1.Wear and puncture resistance.
2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
4.50-16	6	/	/	3.00D	1355	52	4.8	25.8	10.1	TT
4.50-16	8	/	/	3.00D	2205	65	4.8	25.8	10.1	TT
4.50-16	10	/	/	3.00D	2920	77	4.8	25.8	10.1	TT
5.00-16	8	/	/	4.00E	2645	87	5.3	26.8	10.1	TT
5.00-16	10	/	/	4.00E	2975	94	5.3	26.8	10.1	TT
5.50-16	8	/	/	4.00E	2425	68	5.9	27.0	10.1	TT
5.50-16	10	/	/	4.00E	2920	77	5.9	27.0	10.1	TT



LL40

Agricultural Tire
1.Wear and puncture resistance.
2.Good traction.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
10-15	8	/	/	9.00	2735	44	11.8	30.5	12.6	TT

Implement Steering/Traction



LL82

Agricultural Tire
1.Wear and puncture resistance.
2.Good grip and traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
4.00-8	6	/	/	3.00D	905	61	4.3	16.7	8.2	TT
4.00-8	8	/	/	3.00D	1545	77	4.3	16.7	8.2	TT



LBI301

Agricultural Tire
1.Wear and puncture resistance.
2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
600/50-22.5IMP	16	169	A6	AG20.00	12700	38	24.1	46.1	31.5	TL
650/65-30.5IMP	/	173	A8	AG20.00	14300	29	25.4	63.8	40.3	TL
850/50-30.5IMP	/	179	A8	AG28.00	17100	29	33.9	64.0	40.3	TL

Industrial Tractor



LBR401

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
8.25-16	12	/	A6	6.50H	D 3000 S 3415	77	9.3	33.7	27.7	TT



LL101

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
16.9-28	12	/	A8	W15L	7600	38	16.9	55.5	35.3	TL
19.5L-24	12	/	A6	DW16	7600	34	19.5	52.8	37.8	TL

BiasTire



Passenger Car



LL19

Bias Passenger Car Tire

- 1.Wear and crack resistance.
- 2.Low rolling resistance.
- 3.Good heat dissipation.

Size	Ply Rat- ing	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
5.60-13	4	70	K	4J	730	25	5.7	23.6	7.6	TT
5.60-13	6	74	K	4J	815	30	5.7	23.6	7.6	TT



LL64

Bias Passenger Car Tire

- 1.Wear and crack resistance.
- 2.Low rolling resistance.
- 3.Good heat dissipation.

Size	Ply Rat- ing	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
5.90-13	4	73	K	4J	815	25	5.9	24.3	10.1	TT

Mini Truck



LL20

Bias Mini Truck Tire

- 1.Low rolling resistance.
- 2.Good wear and crack resistance.
- 3.Good heat dissipation.
- 4.Low noise.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
5.00-10ULT	8	79/77	K	3.50B	D910 S965	58	5.6	20.4	10.1	TT
5.00-12ULT	8	83/81	K	3.50B	D1020 S1075	58	5.6	22.4	10.1	TT
5.00-12ULT	10	88/86	K	3.50B	D1170 S1235	73	5.6	22.4	10.1	TT



LL21

Bias Mini Truck Tire

- 1.Low rolling resistance.
- 2.Good wear and crack resistance.
- 3.Good heat dissipation.
- 4.Low noise.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
4.50-12ULT	8	77/76	K	3.00B	D880 S910	58	5.0	21.5	8.8	TT



LL41

Bias Mini Truck Tire

- 1.Low rolling resistance.
- 2.Good wear and crack resistance.
- 3.Good heat dissipation.
- 4.Low noise.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
5.00-12ULT	8	83/81	K	3.50B	D1020 S1075	58	5.6	22.4	10.1	TT
5.00-12ULT	10	88/86	K	3.50B	D1170 S1235	73	5.6	22.4	10.1	TT
5.50-12ULT	10	92/89	K	4J	1365	77	6.3	23.4	10.1	TT



LL75

Bias Mini Truck Tire

- 1.Low rolling resistance.
- 2.Good wear and crack resistance.
- 3.Good heat dissipation.
- 4.Low noise.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
4.50-10ULT	6	60/57	K	3.50D	D505 S550	44	4.7	18.5	8.8	TT
4.50-10ULT	8	72/70	K	3.50D	D740 S770	58	4.7	18.5	8.8	TT

Light Truck



LL51

Bias Mini Truck Tire

- 1.Good wear and crack resistance.
- 2.Low rolling resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
5.00-12ULT	8	83/81	K	3.50B	D1020 S1075	58	5.6	22.4	10.1	TT



LL9

Bias Light Truck Tire

- 1.Low noise.
- 2.Low rolling resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
6.00-15LT	8	97/92	K	4.50E	D1390 S1610	61	6.7	27.8	11.3	TT
6.00-15LT	10	101/97	K/L	4.50E	D1610 S1820	77	6.7	27.8	11.3	TT
6.50-15LT	8	101/97	K/L	4.50E	D1610 S1820	61	7.1	28.7	11.3	TT
6.50-15LT	10	106/101	K/L	4.50E	D1820 S2095	77	7.1	28.7	11.3	TT
7.50-15LT	10	115/110	K	6.00G	D2335 S2680	77	8.5	30.7	13.9	TT
7.50-15LT	12	119/115	K/L	6.00G	D2680 S3000	91	8.5	30.7	13.9	TT



LL9A

Bias Light Truck Tire

- 1.Low noise.
- 2.Low rolling resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
7.50-16LT	10	116/112	K/L	6.00G	D2470 S2755	75	8.5	31.7	14.5	TT
7.50-16LT	12	120/116	K/L	6.00G	D2755 S3085	91	8.5	31.7	14.5	TT
7.50-16LT	14	122/118	K/L	6.00G	D2910 S3305	106	8.5	31.7	14.5	TT
7.50-16LT	16	126/123	K	6.00G	D3350 S3750	123	8.5	31.7	14.5	TT



LL11

Bias Light Truck Tire

- 1.Low noise and fuel saving.
- 2.Good wear resistance and heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
6.50-16LT	10	107/103	K/L	5.50F	D1930 S2150	77	7.3	29.5	12.6	TT
6.50-16LT	12	110/105	K/L	5.50F	D2040 S2335	91	7.3	29.5	12.6	TT
7.00-15LT	10	109/105	K/L	5.50F	D2040 S2270	77	7.9	29.5	12.6	TT
7.00-15LT	12	113/109	K	5.50F	D2270 S2535	91	7.9	29.5	12.6	TT
7.00-16LT	10	111/106	K	5.50F	D2095 S2405	77	7.9	30.5	15.1	TT
7.00-16LT	12	115/110	K/L	5.50F	D2335 S2680	91	7.9	30.5	15.1	TT
7.00-16LT	14	118/114	K	5.50F	D2600 S2910	106	7.9	30.5	15.1	TT



LL10

Bias Light Truck Tire

Side slip resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
7.50-16LT	8	112/107	K/L	6.00G	D2150 S2470	61	8.5	31.7	16.4	TT
7.50-16LT	10	116/112	K	6.00G	D2470 S2755	75	8.5	31.7	16.4	TT



LL14

Bias Light Truck Tire

- 1.Low rolling resistance.
- 2.Good wear and crack resistance.
- 3.Multiple functions.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
6.50-16LT	8	102/98	K	5.50F	D1655 S1875	61	7.3	29.5	13.2	TT
6.50-16LT	10	107/103	K	5.50F	D1930 S2150	77	7.3	29.5	13.2	TT
6.50-16LT	12	110/105	K	5.50F	D2040 S2335	91	7.3	29.5	13.2	TT



LL15

Bias Light Truck Tire
Good wear and crack resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
6.00-13LT	6	88/83	K	4.50B	D1075 S1235	46	6.7	25.8	11.3	TT
6.00-13LT	8	93/89	K	4.50B	D1280 S1435	61	6.7	25.8	11.3	TT
6.00-14LT	8	95/90	K	4 1/2J	D1325 S1520	61	6.7	26.8	11.3	TT
6.00-14LT	10	99/95	K	4 1/2J	D1565 S1765	77	6.7	26.8	11.3	TT
6.00-15LT	8	97/92	K	4.50E	D1390 S1610	61	6.7	27.8	11.3	TT
6.00-15LT	10	101/97	K	4.50E	D1610 S1820	77	6.7	27.8	11.3	TT
6.50-14LT	8	99/95	K	4 1/2J	D1520 S1710	61	7.1	27.8	11.3	TT
6.50-14LT	10	104/100	K	4 1/2J	D1765 S1985	77	7.1	27.8	11.3	TT
6.50-15LT	8	101/97	K	4.50E	D1610 S1820	61	7.1	28.7	11.3	TT
6.50-15LT	10	106/101	K/L	4.50E	D1820 S2095	77	7.1	28.7	11.3	TT
6.50-16LT	10	107/103	K/L	5.50F	D1930 S2150	77	7.3	29.5	12.6	TT
6.50-16LT	12	110/105	K	5.50F	D2040 S2335	91	7.3	29.5	12.6	TT
7.50-16LT	10	116/112	K/L	6.00G	D2470 S2755	75	8.5	31.7	16.4	TT
7.50-16LT	12	120/116	K	6.00G	D2755 S3085	91	8.5	31.7	16.4	TT
7.50-16LT	14	122/118	K	6.00G	D2910 S3305	106	8.5	31.7	16.4	TT
7.50-16LT	16	126/123	K	6.00G	D3350 S3750	123	8.5	31.7	16.4	TT
8.25-16LT	14	126/122	K	6.50H	D3305 S3750	91	9.3	33.7	18.3	TT
8.25-16LT	16	128/124	K	6.50H	D3525 S3970	106	9.3	33.7	18.3	TT



LL16

Bias Light Truck Tire
1.Good wear and crack resistance.
2.Low rolling resistance.
3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
6.50-14LT	8	99/92	K/L	4 1/2J	D1520 S1710	61	7.1	27.8	11.3	TT
6.50-14LT	10	104/100	K/L	4 1/2J	D1765 S1985	77	7.1	27.8	11.3	TT



LL17

Bias Light Truck Tire
1.Good wear and crack resistance.
2.Low rolling resistance.
3.Good heat dissipation.
4.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
6.00-14LT	8	95/90	K	4 1/2J	D1325 S1520	61	6.7	26.8	11.3	TT
6.00-14LT	10	100/96	K	4 1/2J	D1565 S1765	77	6.7	26.8	11.3	TT



LL18

Bias Light Truck Tire

- 1.Good wear and crack resistance.
- 2.Fuel saving.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
6.00-13LT	6	88/83	K	4.50B	D1075 S1235	46	6.7	25.8	11.3	TT
6.00-13LT	8	93/89	K	4.50B	D1280 S1435	61	6.7	25.8	11.3	TT



LL19

Bias Light Truck Tire

- 1.Good wear resistance.
- 2.Good heat dissipation.
- 3.Low noise.
- 4.Fuel saving.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
5.50-13LT	8	88/84	K	4.00B	D1100 S1235	61	6.3	24.4	11.3	TT



LL62

Bias Light Truck Tire

- 1.Wear and crack resistance.
- 2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
7.50-16LT	14	122/118	K	6.00G	D2910 S3305	106	8.5	32.1	20.2	TT
7.50-16LT	16	126/123	K	6.00G	D3350 S3750	123	8.5	32.1	20.2	TT



LL89

Bias Light Truck Tire

- 1.Wear and crack resistance.
- 2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
7.50-16LT	14	122/118	K	6.00G	D2910 S3305	106	8.5	32.1	19.5	TT
7.50-16LT	16	124/120	K	6.00G	D3065 S3485	110	8.5	32.1	19.5	TT
8.25-16LT	16	128/124	K	6.50H	D3525 S3970	106	9.3	34.1	23.3	TT



LL201

Bias Light Truck Tire

- 1.Good wear resistance.
- 2.Good heat dissipation.
- 3.Low noise.
- 4.Fuel saving.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
6.50-16LT	10	107/103	K	5.50F	D1930 S2150	77	7.3	29.5	12.6	TT
7.50-16LT	8	112/107	L	6.00G	D2150 S2470	61	8.5	32.1	15.1	TT
7.50-16LT	10	116/112	K/L	6.00G	D2470 S2755	75	8.5	32.1	15.1	TT



MG-99

Bias Light Truck Tire

- 1.Good wear resistance.
- 2.Good heat dissipation.
- 3.Low noise.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
7.50-16LT	16	126/123	K	6.00G	D3350 S3750	123	8.5	32.1	22.7	TT



LL1

Bias Truck/Bus Tire

- 1.Low rolling resistance.
- 2.Good Wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
12.00-24	16	156/152	G	8.5	D7830 S8820	97 107	12.4	48.2	18.9	TT
12.00-24	18	158/154	G	8.5	D8270 S9370	107 118	12.4	48.2	18.9	TT



LL2

Bias Truck/Bus Tire

- 1.Low rolling resistance.
- 2.Good Wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
7.00-16LT	10	111/106	K	5.50F	D2095 S2405	77	7.9	30.5	15.1	TT
7.00-16LT	12	115/110	K	5.50F	D2335 S2680	91	7.9	30.5	15.1	TT
7.00-16LT	14	118/114	K	5.50F	D2600 S2910	106	7.9	30.5	15.1	TT
9.00-20	12	138/133	G	7.0	D4540 S5205	87 97	10.2	40.1	18.9	TT
9.00-20	14	141/137	G/K	7.0	D5070 S5675	102 112	10.2	40.1	18.9	TT
9.00-20	16	145/140	G	7.0	D5510 S6395	118 128	10.2	40.1	18.9	TT
10.00-20	16	146/142	G	7.5	D5840 S6610	107 118	10.9	41.5	18.9	TT
10.00-20	18	150/145	G	7.5	D6395 S7390	122 132	10.9	41.5	18.9	TT
12.00-20	16	152/148	G	8.5	D6940 S7830	97 107	12.4	44.3	18.9	TT
12.00-20	18	154/150	G	8.5	D7390 S8270	107 118	12.4	44.3	18.9	TT



LL3

Bias Truck/Bus Tire

- 1.Wear and crack resistance.
- 2.Lateral grip.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
8.25-20	14	136/131	G	6.5	D4300 S4940	107 118	9.3	38.3	18.9	TT



LL6

Bias Truck/Bus Tire

- 1.Good Wear and crack resistance.
- 2.High traction.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
9.00-20	12	138/133	G	7.0	D4540 S5205	87 97	10.2	40.1	18.9	TT
9.00-20	14	141/137	G	7.0	D5070 S5675	102 112	10.2	40.1	18.9	TT
9.00-20	16	145/140	G	7.0	D5510 S6395	118 128	10.2	40.1	20.2	TT
12.00-24	16	156/152	G	8.5	D7830 S8820	97 107	12.4	48.2	20.2	TT
12.00-24	18	158/154	G	8.5	D8270 S9370	107 118	12.4	48.2	20.2	TT



LL4

Bias Truck/Bus Tire

- Good Wear and crack resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
9.00-20	12	138/133	G	7.0	D4540 S5205	87 97	10.2	40.1	18.9	TT
9.00-20	14	141/137	G/K	7.0	D5070 S5675	102 112	10.2	40.1	18.9	TT
9.00-20	16	145/140	G	7.0	D5510 S6395	118 128	10.2	40.1	18.9	TT
11.00-20	16	150/145	G	8.0	D6395 S7390	107 118	11.5	42.7	20.2	TT
11.00-20	18	153/148	G	8.0	D6940 S8050	122 132	11.5	42.7	20.2	TT



LL8

Bias Truck/Bus Tire

- 1.Good Wear and crack resistance.
- 2.High traction.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
7.00-15LT	10	109/105	K	5.50F	D2040 S2270	77	7.9	29.5	12.6	TT
7.00-15LT	12	113/109	K	5.50F	D2270 S2535	91	7.9	29.5	12.6	TT
7.50-15LT	12	119/115	K	6.00G	D2680 S3000	91	8.5	30.7	13.9	TT
7.00-20	12	124/120	G	5.5	D3085 S3525	97 107	7.9	35.6	15.1	TT



LL7

Bias Truck/Bus Tire
1.Good Wear and crack resistance.
2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
7.50-20	12	128/124	G	6.0	D3525 S3970	97 107	8.5	36.8	17.6	TT
7.50-20	14	130/126	G	6.0	D3750 S4190	107 118	8.5	36.8	17.6	TT



LL47

Bias Truck/Bus Tire
1.Wear and crack resistance.
2.Low rolling resistance.
3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
7.00-20	12	124/120	G	5.5	D3085 S3525	97 107	7.9	35.6	15.1	TT
7.00-20	14	127/123	G	5.5	D3415 S3860	112 122	7.9	35.6	15.1	TT
8.25-20	14	136/131	G/K	6.5	D4300 S4940	107 118	9.3	38.3	17.6	TT
8.25-16LT	14	126/122	K/L	6.50H	D3305 S3750	91	9.3	33.7	15.7	TT
8.25-16LT	16	128/124	K/L	6.50H	D3525 S3970	106	9.3	33.7	15.7	TT
9.00-20	14	141/137	G/K	7.0	D5070 S5675	102 112	10.2	40.1	18.9	TT
9.00-20	16	145/140	G	7.0	D5510 S6395	118 128	10.2	40.1	18.9	TT
10.00-20	16	146/142	G	7.5	D5840 S6610	107 118	10.9	41.5	18.9	TT
10.00-20	18	150/145	G	7.5	D6395 S7390	122 132	10.9	41.5	18.9	TT
11.00-20	16	150/145	G	8.0	D6395 S7390	107 118	11.5	42.7	18.9	TT
11.00-20	18	153/148	G	8.0	D6940 S8050	122 132	11.5	42.7	18.9	TT
12.00-20	16	152/148	G	8.5	D6940 S7830	97 107	12.4	44.3	18.9	TT
12.00-20	18	154/150	G	8.5	D7390 S8270	107 118	12.4	44.3	18.9	TT



LL48

Bias Truck/Bus Tire
1.Fuel saving.
2.Low noise.
3.Wear resistance.
4.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
9.00-20	12	138/133	G	7.0	D4540 S5205	87 97	10.2	40.1	17.0	TT
9.00-20	14	141/137	G	7.0	D5070 S5675	102 112	10.2	40.1	17.0	TT
9.00-20	16	145/140	G	7.0	D5510 S6395	118 128	10.2	40.1	17.0	TT



LL57

Bias Truck/Bus Tire
1.Good heat dissipation.
2.Multiple functions.
3.Crack resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
10.00-20	16	146/142	G	7.5	D5840 S6610	107 118	10.9	41.5	20.2	TT
10.00-20	18	150/145	G	7.5	D6395 S7390	122 132	10.9	41.5	20.2	TT



LL58

Bias Truck/Bus Tire
Available for more heavy load.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
10.00-20	16	146/142	G	7.5	D5840 S6610	107 118	10.9	41.5	20.2	TT
10.00-20	18	150/145	G	7.5	D6395 S7390	122 132	10.9	41.5	20.2	TT



LL59

Bias Truck/Bus Tire
1.Available for heavy load.
2.Good wear resistance.
3.Stable performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
7.50-16LT	14	122/118	K	6.00G	D2910 S3305	106	8.5	31.7	15.1	TT
7.50-16LT	16	126/123	K	6.00G	D3350 S3750	123	8.5	31.7	15.1	TT
8.25-16LT	14	126/122	K	6.50H	D3305 S3750	91	9.3	32.9	18.3	TT
8.25-16LT	16	128/124	K	6.50H	D3525 S3970	106	9.3	32.9	18.3	TT
9.00-20	14	141/137	G	7.0	D5070 S5675	102 112	10.2	40.1	17.6	TT
9.00-20	16	145/140	G	7.0	D5510 S6395	118 128	10.2	40.1	17.6	TT
10.00-20	16	146/142	G	7.5	D5840 S6610	107 118	10.9	41.5	17.6	TT
10.00-20	18	150/145	G	7.5	D6395 S7390	122 132	10.9	41.5	17.6	TT
11.00-20	16	150/145	G	8.0	D6395 S7390	107 118	11.5	42.7	18.9	TT
11.00-20	18	153/148	G	8.0	D6940 S8050	122 132	11.5	42.7	18.9	TT
12.00-20	16	152/148	G	8.5	D6940 S7830	97 107	12.4	44.3	18.9	TT
12.00-20	18	154/150	G	8.5	D7390 S8270	107 118	12.4	44.3	18.9	TT
12.00-20	20	156/151	G	8.5	D7610 S8820	118 128	12.4	44.3	18.9	TT
14.00-20	18	161/156	E	10.0	D8820 S10200	87 97	14.8	48.8	25.2	TT
14.00-20	20	164/159	E	10.0	D9650 S11000	102 112	14.8	48.8	25.2	TT



LL61

Bias Truck/Bus Tire
1.Wear and crack resistance.
2.Low rolling resistance.
3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
7.50-20	12	128/124	G	6.0	D3525 S3970	97 107	8.5	36.8	14.5	TT
7.50-20	14	130/126	G	6.0	D3750 S4190	107 118	8.5	36.8	14.5	TT



LL77

Bias Truck/Bus Tire
1.Wear and crack resistance.
2.Low rolling resistance.
3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
10.00-20	18	150/145	G	7.5	D6395 S7390	122 132	10.9	42.2	25.2	TT



LL67

Bias Truck/Bus Tire
1.Wear and crack resistance.
2.Low rolling resistance.
3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
7.00-15	8	105/101	L	5.50F	D1820 S2040	60	7.9	29.5	10.7	TT
7.50-16	10	116/112	L	6.00G	D2470 S2755	75	8.5	31.7	10.1	TT
10.00-20	14	144/139	G	7.5	D5355 S6610	90 100	10.9	41.5	13.9	TT



LL79

Bias Truck/Bus Tire
1.Wear and crack resistance.
2.Low rolling resistance.
3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
8.25-20	14	136/131	G	6.5	D4300 S4940	107 118	9.3	38.3	17.0	TT



LL87

Bias Truck/Bus Tire

- 1.Wear and crack resistance.
- 2.Low rolling resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
7.50-16LT	14	122/118	K	6.00G	D2910 S3305	106	8.5	32.1	22.0	TT
8.25-16LT	14	126/122	K	6.50H	D3305 S3750	91	9.3	33.7	17.6	TT
8.25-20	14	136/131	G	6.5	D4300 S4940	107 118	9.3	38.3	17.6	TT
9.00-20	16	145/140	G	7.0	D5510 S6395	118 128	10.2	40.1	18.9	TT
10.00-20	18	150/145	G	7.5	D6395 S7390	122 132	10.9	42.2	25.2	TT
11.00-20	18	153/148	G	8.0	D6940 S8050	122 132	11.5	42.7	20.2	TT
12.00-20	18	154/150	G	8.5	D6940 S8050	107 118	12.4	44.3	20.2	TT



LL96

Bias Truck/Bus Tire

- 1.Wear and crack resistance.
- 2.Low rolling resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
10.00-20	18	150/145	G	7.5	D6395 S7390	122 132	10.9	42.2	25.2	TT
11.00-20	16	150/145	G	8.0	D6395 S7390	107 118	11.5	43.5	26.5	TT
11.00-20	18	153/148	G	8.0	D6940 S8050	122 132	11.5	43.5	26.5	TT
12.00-20	18	154/150	G	8.5	D7390 S8270	107 118	12.4	45.1	26.5	TT
14.00-20	20	164/159	E	10.0	D9650 S11000	102 112	14.8	49.8	27.7	TT



LL95

Bias Truck/Bus Tire

- 1.Wear and crack resistance.
- 2.Low rolling resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
13.00-20	16	156/151	E	9.0	D7610 S8820	87 97	13.4	46.3	22.7	TT
13.00-20	18	158/154	E	9.0	D8270 S9370	102 112	13.4	46.3	22.7	TT



LL96-T

Bias Truck/Bus Tire

- 1.Low rolling resistance.
- 2.Good Wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
7.00-16LT	14	118/114	G	5.50F	D2600 S2910	106	7.9	30.9	25.2	TT
7.50-16LT	14	122/118	G	6.00G	D2910 S3305	106	8.5	32.1	27.7	TT
7.50-16LT	16	126/123	G	6.00G	D3350 S3750	123	8.5	32.1	27.7	TT
8.25-16LT	14	126/122	G	6.50H	D3305 S3750	91	9.3	34.1	27.7	TT
8.25-16LT	16	128/124	G	6.50H	D3525 S3970	106	9.3	34.1	27.7	TT
8.25-20	14	136/131	C	6.5	D4300 S4940	107 118	9.3	39.1	23.9	TT
9.00-20	16	145/140	B	7.0	D5510 S6395	118 128	10.2	40.9	27.7	TT
11.00-20	18	153/148	C	8.0	D6940 S8050	122 132	11.5	43.5	34.0	TT
12.00-20	18	154/150	C	8.5	D7390 S8270	107 118	12.4	45.1	34.0	TT
13.00-20	18	158/154	B	9.0	D8270 S9370	102 112	13.4	47.2	30.2	TT



SL96-T

Bias Truck/Bus Tire

- 1.Low rolling resistance.
- 2.Good Wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
10.00-20	18	150/145	C	7.5	D6395 S7390	122 132	10.9	42.2	34.0	TT



LL98

Bias Truck/Bus Tire

- 1.Wear and crack resistance.
- 2.Low rolling resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
9.00-20	16	145/140	G	7.0	D5510 S6395	118 128	10.2	40.9	25.2	TT
10.00-20	18	150/145	G	7.5	D6395 S7390	122 132	10.9	42.2	26.5	TT
12.00-20	18	154/150	G	8.5	D7390 S8270	107 118	12.4	45.1	26.5	TT
14.00-20	20	164/159	E	10.0	D9650 S11000	102 112	14.8	49.8	27.7	TT



LL97

Bias Truck/Bus Tire

- 1.Wear and crack resistance.
- 2.Low rolling resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
9.00-20	16	145/140	G	7.0	D5510 S6395	118 128	10.2	40.1	18.9	TT
10.00-20	18	150/145	G	7.5	D5510 S6395	122 132	10.9	42.2	25.2	TT



LL99

Bias Truck/Bus Tire

- 1.Wear and crack resistance.
- 2.Low rolling resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
7.50-16LT	16	126/123	K	6.00G	D3350 S3750	123	8.5	32.1	20.2	TT
8.25-16LT	16	128/124	K	6.50H	D3525 S3970	106	9.3	34.1	20.8	TT
9.00-16LT	16	134/129	K	6.50H	D4080 S4675	106	10.0	35.5	21.4	TT



LL150

Bias Truck/Bus Tire

- 1.Low rolling resistance.
- 2.Good Wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
14.00-20	20	164/159	E	10.0	D9650 S11000	102 112	14.8	49.8	32.8	TT



LL168A

Bias Truck/Bus Tire

- 1.Available for heavy load.
- 2.Good wear resistance.
- 3.Stable performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
7.00-16LT	12	115/110	K/L	5.50F	D2335 S2680	91	7.9	30.5	14.5	TT
8.25-16LT	14	126/122	K/L	6.50H	D3305 S3750	91	9.3	33.7	15.1	TT
8.25-16LT	16	128/124	K/L	6.50H	D3525 S3970	106	9.3	33.7	15.1	TT



LL159

Bias Truck/Bus Tire

- 1.Available for heavy load.
- 2.Good wear resistance.
- 3.Stable performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load	Inflated Pressure	Overall Width	Overall Diameter	Tread Depth	Type
					lbs	psi	in	in	32nds	
7.50-20	14	130/126	G	6.0	D3750 S4190	107 118	8.5	36.8	15.1	TT







SAKA TRADING - SAL
YOUR RESOURCEFUL PARTNER

SECTOR 32 - STREET 49,
CHOUEIFAT - LEBANON

T : 05 400 008
M: 03 752 445 | 81 81 81 11

INFO@SAKA.COM.LB
WWW.SAKA.COM.LB