

SHANDONG
LINGLONG TIRE
CO.,LTD.



2019 TIRE CATALOGUE

PCR TIRE
TBR TIRE
SPECIALTY TIRE

LINGLONG johnny zheng
192.168.56.90 2020-10-26 11:05:22



P/004

COMPANY PROFILE



P/008

PCR TIRE




CONTENTS

P/044 TBR TIRE



P/132 SPECIALTY TIRE

OTR [P/132](#)
AGRICULTURAL TIRE [P/158](#)
INDUSTRIAL TIRE [P/184](#)
BIAS TIRE [P/190](#)

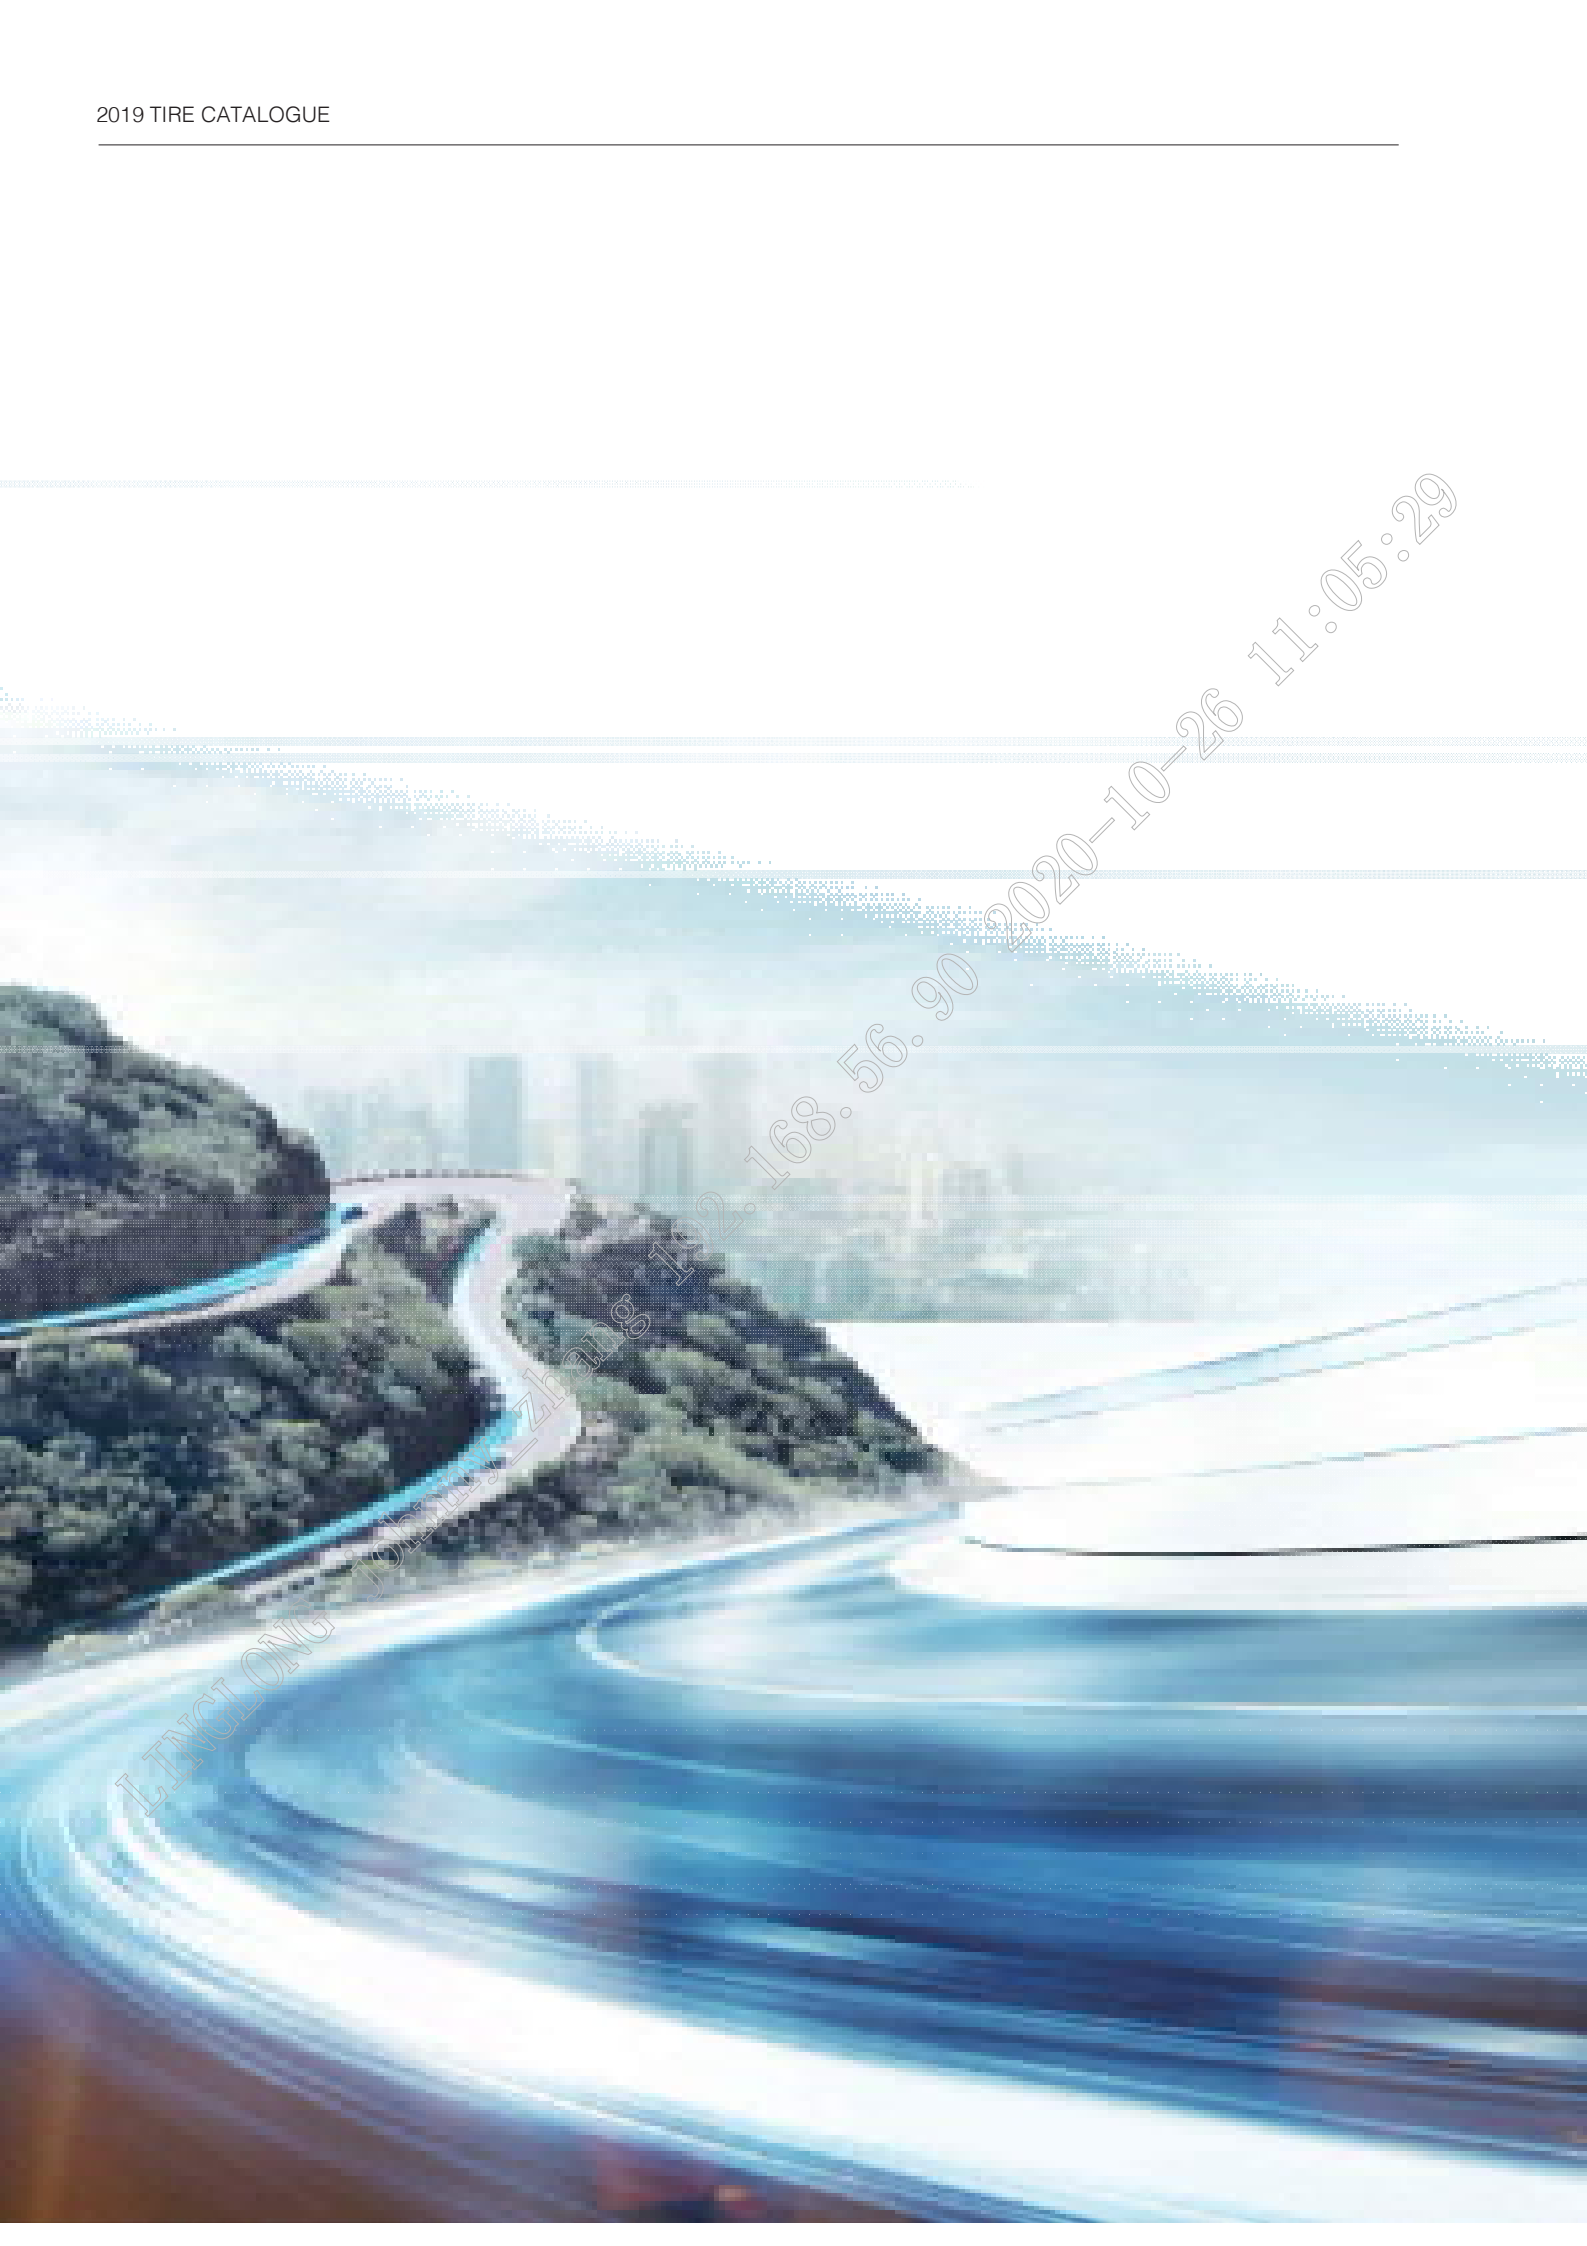

LINGLONG Tires Zhang 192.168.56.90 2020-10-26 11:05:29

COMPANY PROFILE

Linglong Tire is a global manufacturing enterprise with large scale facilities. After several years of innovation development, Linglong has been consistently among the top 20 tire enterprises in the world and top 3 in China for several years.

Currently, Linglong has established manufacturing facilities in Dezhou China, Liuzhou China, Jingmen China and Thailand while maintaining the operations facility in Zhaoyuan China, in order to form its 5+3 global layout. On August 21, 2018, Linglong brought forward to build high performance radial tire project with annual capacity reaching 13.62 million units in the free trade area of Zrenjanin, southeast of Serbia, which demonstrates that Linglong's second overseas manufacturing base will be in Serbia. On 30th of March, 2019, Linglong International Europe D.O.O. Zrenjanin (LLIE) project launch ceremony was held in Serbia successfully.

Linglong is dedicated in achieving world-class tire company and target to be the world-class tire enterprise with global competitiveness, advanced technology and management.





**Linglong Tire China Truck
Racing Championship**




**Linglong Tire's Youth Football
Training Camp in Thailand**



Sponsor Ratchaburi Mitr Phol FC



JUVENTUS Official Tire

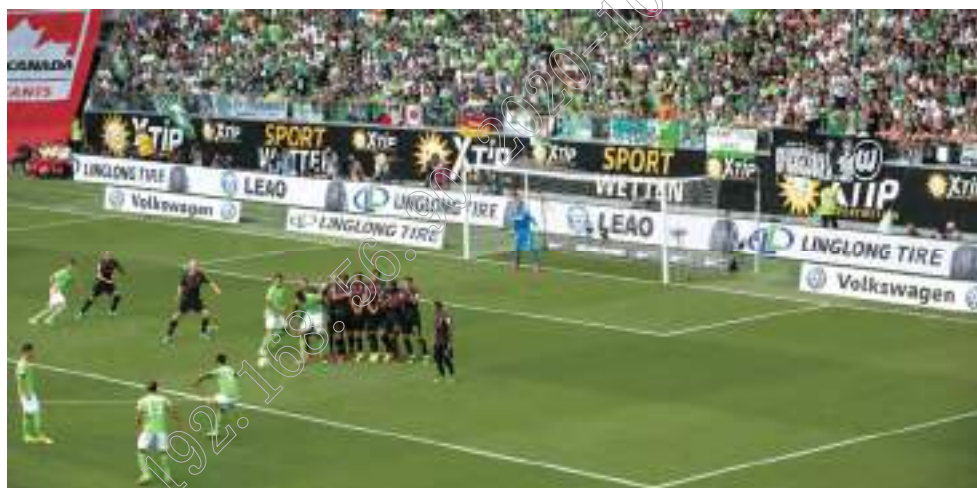

Club of Champions Partner of VfL Wolfsburg



Fantastic Trip to VfL Wolfsburg with Linglong Tire





PCR TIRE

Passenger Car Tire





NEW

iGREEN All Season

All Season Tire

1. Excellent handling.
2. Lower rolling resistance.
3. All season tire which is applicable to different weather and road conditions.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
145/70R13	--	71	T	4.50B	345	250	534	150	6.2
155/65R14	--	75	T	4 1/2J	387	250	558	157	7.0
155/70R13	--	75	T	4.50B	387	250	548	157	7.0
155/80R13	--	79	T	4.50B	437	240	578	157	7.0
165/60R14	--	75	H	5J	387	250	554	170	7.0
165/65R14	--	79	T	5J	437	250	570	170	7.0
165/70R13	--	79	T	5.00B	437	250	562	170	7.0
165/70R14	--	81	T	5J	462	250	588	170	7.0
175/65R14	--	82	T	5J	475	250	584	177	7.0
175/65R15 XL	--	88	T	5J	560	290	609	177	7.0
175/70R13	--	82	T	5.00B	475	250	576	177	7.0
175/70R14 XL	--	88	T	5J	560	290	602	177	7.0
185/55R15	--	82	H	6J	475	250	585	194	7.0
185/60R14	--	82	H	5 1/2J	475	250	578	189	7.0
185/60R15 XL	--	88	H	5 1/2J	560	290	603	189	7.0
185/65R14	--	86	H	5 1/2J	530	250	596	189	6.2
185/65R15	--	88	H	5 1/2J	560	250	621	189	7.0
185/70R14	--	88	H	5 1/2J	560	250	616	189	6.2
195/45R16 XL	--	84	H	6 1/2J	500	290	582	195	6.7
195/50R15 XL	--	86	H	6J	530	290	577	201	7.0
195/50R16 XL	--	88	V	6J	560	290	602	201	6.7
195/55R15	--	85	H	6J	515	250	595	201	7.0
195/55R16	--	87	H	6J	545	250	620	201	7.0
195/60R15	--	88	H	6J	560	250	615	201	7.0
195/65R15	--	91	H	6J	615	250	635	201	7.0
205/45R16	--	83	V	7J	487	250	590	206	6.7
205/45R17 XL	--	88	V	7J	560	290	616	206	6.7
205/55R16	--	91	V	6 1/2J	615	250	632	214	7.0
205/55R17 XL	--	95	V	6 1/2J	690	290	658	214	7.0
205/60R16 XL	--	96	H	6J	710	290	652	209	7.0
215/40R17 XL	--	87	V	7 1/2J	545	290	604	218	6.7
215/45R16 XL	--	90	V	7J	600	290	600	213	6.7
215/45R17 XL	--	91	V	7J	615	290	626	213	6.7
215/50R17 XL	--	95	V	7J	690	290	648	226	7.0
215/55R16 XL	--	97	V	7J	730	290	642	226	7.0
215/55R17 XL	--	98	V	7J	750	290	668	226	7.0
215/55R18 XL	--	99	V	7J	775	290	693	226	6.7
215/60R16 XL	--	99	H	6 1/2J	775	290	664	221	7.0
215/60R17 XL	--	100	V	6 1/2J	800	290	690	221	7.0
215/65R15	--	96	H	6 1/2J	710	250	661	221	6.7
215/65R16 XL	--	102	V	6 1/2J	850	290	686	221	6.7
225/35R19 XL	--	88	V	8J	560	290	641	230	6.7
225/40R18 XL	--	92	V	8J	630	290	637	230	6.7
225/45R17 XL	--	94	V	7 1/2J	670	290	634	225	7.0
225/45R18 XL	--	95	V	7 1/2J	690	290	659	225	6.7
225/55R16 XL	--	99	V	7J	775	290	654	233	6.7
225/60R16 XL	--	102	V	6 1/2J	850	290	676	228	6.7
225/60R17 XL	--	103	V	6 1/2J	875	290	702	228	6.7
225/65R17	--	102	H	6 1/2J	850	250	724	228	6.7
235/35R19 XL	--	91	V	8 1/2J	615	290	647	241	6.7
235/45R17 XL	--	97	V	8J	730	290	644	236	6.7
235/65R17 XL	--	108	V	7J	1000	290	738	240	6.7
245/40R18 XL	--	97	V	8 1/2J	730	290	653	248	7.0
245/45R17 XL	--	99	V	8J	775	290	652	243	6.7



NOVA-FORCE

UHP Tire With Excellent Wet Grip And Low Noise

1. Excellent handling performance.
2. Improved drainage performance to effectively reduce risk of hydroplaning.
3. Superior driving stability.
4. Comfortable ride.
5. Designed to fit premium cars and sports cars.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
195/45R16 XL	--	84	V	6 1/2J	500	290	582	195	7.8
205/40R17 XL	--	84	W	7 1/2J	500	290	596	212	7.8
205/45R16 XL	--	87	W	7J	545	290	590	206	7.8
205/45R17 XL	--	88	W	7J	560	290	616	206	7.8
205/45R17 XL	--	88	V	7J	560	290	616	206	7.8
205/50R16	--	87	W	6 1/2J	545	250	612	214	7.8
205/50R16	--	87	V	6 1/2J	545	250	612	214	7.8
205/50R17 XL	--	93	W	6 1/2J	650	290	638	214	7.8
205/55R16 XL	--	94	W	6 1/2J	670	290	632	214	7.8
215/35R18 XL	--	84	W	7 1/2J	500	290	607	218	7.8
215/45R18 XL	--	93	W	7J	650	290	651	213	7.8
215/40R16 XL	--	86	W	7 1/2J	530	290	578	218	7.8
215/40R17 XL	--	87	W	7 1/2J	545	290	604	218	7.8
215/40R18 XL	--	89	W	7 1/2J	580	290	629	218	7.8
215/45R16 XL	--	90	V	7J	600	290	600	213	7.5
215/45R17 XL	--	91	W	7J	615	290	626	213	7.8
215/50R17 XL	--	95	V	7J	690	290	648	226	7.8
215/50R17 XL	--	95	W	7J	690	290	648	226	7.8
215/55R16 XL	--	97	W	7J	730	290	642	226	7.8
215/55R17	--	94	V	7J	670	250	668	226	7.8
215/55R17 XL	--	98	W	7J	750	290	668	226	7.8
225/35R19 XL	--	88	W	8J	560	290	641	230	7.8
225/35R20 XL	--	90	Y	8J	600	290	666	230	7.8
225/40R18 XL	--	92	W	8J	630	290	637	230	7.8
225/45R17 XL	--	94	W	7 1/2J	670	290	634	225	7.8



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
225/45R18 XL	--	95	W	7 1/2J	690	290	659	225	7.8
225/45R19 XL	--	96	W	7 1/2J	710	290	685	225	7.8
225/50R16 XL	--	96	V	7J	710	290	632	233	7.8
225/50R17 XL	--	98	W	7J	750	290	658	233	7.8
225/55R16	--	95	V	7J	690	250	654	233	7.8
225/55R17	--	97	W	7J	730	250	680	233	7.8
225/55R17	--	101	W	7J	825	290	680	233	7.8
235/30R20 XL	--	88	Y	8 1/2J	560	290	650	242	7.8
235/35R19 XL	--	91	W	8 1/2J	615	290	647	241	7.8
235/40R18 XL	--	95	W	8 1/2J	690	290	645	241	7.8
235/45ZR17 XL	--	97	W	8J	730	290	644	236	7.8
235/45R18 XL	--	98	Y	8J	750	290	669	236	7.5
235/50R17	--	96	Y	7 1/2J	710	250	668	245	7.8
235/50R18 XL	--	101	W	7 1/2J	825	290	693	245	7.8
235/55R19 XL	--	105	W	7 1/2J	925	290	741	245	7.8
245/35R20 XL	--	95	Y	8 1/2J	690	290	680	248	7.8
245/40R17	--	91	W	8 1/2J	615	250	628	248	7.8
245/40R18 XL	--	97	W	8 1/2J	730	290	653	248	7.8
245/40R19 XL	--	98	W	8 1/2J	750	290	679	248	7.8
245/45R17 XL	--	99	W	8J	775	290	652	243	7.8
245/45R18 XL	--	100	W	8J	800	290	677	243	7.8
245/45R19	--	98	Y	8J	750	250	703	243	7.8
255/35R18 XL	--	94	Y	9J	670	290	635	260	7.8
255/45R18 XL	--	103	W	8 1/2J	875	290	687	255	7.8
265/30R19 XL	--	93	W	9 1/2J	650	290	643	271	7.8
265/35R18 XL	--	97	Y	9 1/2J	730	290	643	271	7.8



NOVA-FORCE HP

HP Tire With Good Handling Performance And Low Noise

1. Good straight driving stability.
2. Comfortable and quiet ride.
3. Low rolling resistance for better fuel efficiency.
4. Enhanced wet grip to effectively reduce risk of hydroplaning.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
165/40R17 XL	--	75	V	6J	387	290	564	170	7.4
165/45R16XL	--	74	V	5 1/2J	375	290	554	165	7.4
165/50R15	--	73	V	5J	365	250	547	170	7.4
165/55R15	--	75	V	5J	387	250	563	170	7.3
165/60R14	--	75	H	5J	387	250	554	170	7.3
165/60R15	--	77	H	5J	412	250	579	170	7.3
175/60R15	--	81	H	5J	462	250	591	177	7.3
175/65R14	--	82	H	5J	475	250	584	177	7.3
175/65R15	--	84	H	5J	500	250	609	177	7.6
185/50R16	--	81	H	6J	462	250	592	194	7.5
185/55R14	--	80	H	6J	450	250	560	194	7.7
185/55R15	--	82	V	6J	475	250	585	194	7.7
185/60R14	--	82	H	5 1/2J	475	250	578	189	7.7
185/60R15 XL	--	88	H	5 1/2J	560	290	603	189	7.7
185/65R14	--	86	H	5 1/2J	530	250	596	189	7.8
185/65R15	--	88	H	5 1/2J	560	250	621	189	7.8
195/50R15	--	82	V	6J	475	250	577	201	7.8
195/50R16 XL	--	88	V	6J	560	290	602	201	7.5
195/55R15	--	85	V	6J	515	250	595	201	7.8
195/55R16	--	87	V	6J	545	250	620	201	7.5
195/60R15	--	88	H/V	6J	560	250	615	201	6.0
195/65R14	--	89	H	6J	580	250	610	201	7.2
195/65R15	--	91	H/V	6J	615	250	635	201	7.8
195/60R16	--	89	H	6J	580	250	640	201	7.7
205/50R16	--	87	V	6 1/2J	545	250	612	214	7.8
205/55R15	--	88	V	6 1/2J	560	250	607	214	7.2
205/55R16	--	91	H/V	6 1/2J	615	250	632	214	8.0
205/55R17 XL	--	95	V	6 1/2J	690	290	658	214	7.5
205/60R15	--	91	H/V	6J	615	250	627	209	7.8
205/60R16	--	92	H/V	6J	630	250	652	209	7.8
205/65R15	--	94	H/V	6J	670	250	647	209	7.8
205/65R16	--	95	H	6J	690	250	672	209	7.8
215/60R16	--	95	H	6 1/2J	690	250	664	221	7.8
215/60R16 XL	--	99	H/V	6 1/2J	775	290	664	221	7.8
215/60R17	--	96	H	6 1/2J	710	250	690	221	7.8
215/65R15 XL	--	100	H	6 1/2J	800	290	661	221	7.8
215/65R16	--	98	H	6 1/2J	750	250	686	221	7.7
225/65R16	--	100	H	6 1/2J	800	250	698	228	8.6
225/65R17	--	102	H	6 1/2J	850	250	724	228	8.6
225/70R16	--	103	H	6 1/2J	875	250	722	228	8.6
235/65R16	--	103	H	7J	875	250	712	240	8.2
255/65R16	--	109	H	7 1/2J	1030	250	738	260	8.1



NOVA-FORCE GP

Eco-Friendly Tire

- 1.Low resistance.
- 2.Low noise.
- 3.Excellent wet performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
145/70R12	--	69	S	4.50B	325	250	509	150	6.2
145/70R13	--	71	T	4.50B	345	250	534	150	7.3
145/80R13	--	75	T	4.00B	387	240	562	145	7.1
155/65R13	--	73	T	4.50B	365	250	532	157	7.3
155/65R14	--	75	T	4 1/2J	387	250	558	157	7.3
155/70R12	--	73	S	4.50B	365	250	523	157	7.5
155/70R13	--	75	T	4.50B	387	250	548	157	7.3
155/80R13	--	79	T	4.50B	437	240	578	157	7.3
165/65R13	--	77	T	5.00B	412	250	544	170	7.3
165/65R14	--	79	T	5J	437	250	570	170	7.3
165/70R13	--	79	T	5.00B	437	250	562	170	7.3
165/70R14	--	81	T	5J	462	250	588	170	7.3
175/60R13	--	77	H	5.00B	412	250	540	177	7.3
175/65R13	--	80	T	5.00B	450	250	558	177	7.3
175/65R14	--	82	T	5J	475	250	584	177	6.0
175/65R14 XL	--	86	T	5J	530	290	584	177	7.3
175/70R13	--	82	T	5.00B	475	250	576	177	7.3
175/70R14	--	84	T	5J	500	250	602	177	7.3
175/70R14 XL	--	88	T	5J	560	290	602	177	7.3
185/65R14	--	86	T	5 1/2J	530	250	596	189	7.3
185/65R15 XL	--	92	T	5 1/2J	630	290	621	189	7.7
185/65R15	--	88	T	5 1/2J	560	250	621	189	7.7
185/70R13	--	86	T	5.50B	530	250	590	189	7.3
185/70R14	--	88	T	5 1/2J	560	250	616	189	7.7
195/65R15	--	91	T	6J	615	250	635	201	6.0
195/65R15 XL	--	95	T	6J	690	290	635	201	6.0
195/70R14	--	91	T	6J	615	250	630	201	7.3
205/60R14	--	88	H	6J	560	250	602	209	7.7
235/75R15	--	105	T	6 1/2J	925	250	733	235	7.9



LION SPORT

Ultra High Performance

1. Directional tread pattern design.
2. Excellent handling performance.
3. Low noise.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
195/45R16 XL	--	84	V	6 1/2J	500	290	582	195	7.8
195/50R15	--	82	V	6J	475	250	577	201	7.7
195/55R15	--	85	H	6J	515	250	595	201	7.7
205/40R17 XL	--	84	W	7 1/2J	500	290	596	212	7.8
205/45R16 XL	--	87	W	7J	545	290	590	206	7.8
205/45R17 XL	--	88	W	7J	560	290	616	206	7.8
205/50R16	--	87	W	6 1/2J	545	250	612	214	7.8
205/50R16	--	87	V	6 1/2J	545	250	612	214	7.8
205/50R17 XL	--	93	W	6 1/2J	650	290	638	214	7.8
205/55R16 XL	--	94	W	6 1/2J	670	290	632	214	7.8
215/35R18 XL	--	84	W	7 1/2J	500	290	607	218	7.8
215/40R16 XL	--	86	W	7 1/2J	530	290	578	218	7.8
215/40R17 XL	--	87	W	7 1/2J	545	290	604	218	7.8
215/45R17 XL	--	91	W	7J	615	290	626	213	7.8
215/50R17	--	91	V	7J	615	250	648	226	7.7
215/55R16 XL	--	97	W	7J	730	290	642	226	7.8
215/55R17 XL	--	98	W	7J	750	290	668	226	7.8
225/35R19 XL	--	88	W	8J	560	290	641	230	7.8
225/35R20 XL	--	90	W	8J	600	290	666	230	7.7
225/40R18 XL	--	92	W	8J	630	290	637	230	7.8
225/45R17 XL	--	94	W	7 1/2J	670	290	634	225	7.8
225/45R18 XL	--	95	W	7 1/2J	690	290	659	225	7.8
225/50R16 XL	--	96	V	7J	710	290	632	233	7.8
225/50R17 XL	--	98	W	7J	750	290	658	233	7.8
225/50R18	--	95	V	7J	690	250	683	233	7.8

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
245/30R22 XL	--	92	W	8 1/2J	630	290	707	248	8.0
235/30R20 XL	--	88	Y	8 1/2J	560	290	650	242	7.8
235/30R22 XL	--	90	W	8 1/2J	600	290	701	242	8.0
235/35R19 XL	--	91	W	8 1/2J	615	290	647	241	7.8
235/40R18 XL	--	95	W	8 1/2J	690	290	645	241	7.8
235/45R17 XL	--	97	W	8J	730	290	644	236	7.8
235/45R20 XL	--	100	W	8J	800	290	720	236	7.8
235/50R18 XL	--	101	W	7 1/2J	825	290	693	245	7.8
235/55R17 XL	--	103	W	7 1/2J	875	290	690	245	7.7
245/40R18 XL	--	97	W	8 1/2J	730	290	653	248	7.8
245/45R17 XL	--	99	W	8J	775	290	652	243	7.8
245/45R18 XL	--	100	W	8J	800	290	677	243	7.8
245/50R20	--	102	V	7 1/2J	850	250	754	253	7.8
255/35R20	--	97	W	9J	730	290	686	260	7.8
255/45R18 XL	--	103	W	8 1/2J	875	290	687	255	7.8
265/30R19 XL	--	93	W	9 1/2J	650	290	643	271	7.8
265/35R18 XL	--	97	H	9 1/2J	730	290	643	271	7.7
265/45R20	--	104	W	9J	900	250	746	266	7.8
265/50R20 XL	--	111	V	8 1/2J	1090	290	774	277	8.2
265/60R18 XL	--	114	H	8J	1180	290	775	272	8.2
275/45R20	--	110	V	9J	1060	290	756	273	8.3
275/50R20 XL	--	113	W	8 1/2J	1150	290	784	284	8.5
225/55R17 XL	--	101	W	7J	825	290	680	233	7.7
235/30R22 XL	--	90	W	8 1/2J	600	290	701	242	8.0
235/45R18	--	94	W	8J	670	250	669	236	7.7
235/55R19 XL	--	105	W	7 1/2J	925	290	741	245	7.7
245/35R20 XL	--	95	W	8 1/2J	690	290	680	248	7.7
245/40R17 XL	--	95	W	8 1/2J	690	290	628	248	7.7
245/40R19 XL	--	98	W	8 1/2J	750	290	679	248	7.7
245/45R20 XL	--	103	W	8J	875	290	728	243	7.7
255/30R22 XL	--	95	V	9J	690	290	713	260	8.0
255/35R19 XL	--	96	W	9J	710	290	661	260	7.7
265/35R22 XL	--	102	W	9 1/2J	850	290	745	271	8.0
275/40R20 XL	--	106	W	9 1/2J	950	290	728	278	8.3
275/55R20 XL	--	117	W	8 1/2J	1285	290	810	284	8.5
305/30R26 XL	--	109	W	11J	1030	290	844	313	8.3
305/35R24 XL	--	112	V	11J	1120	290	824	313	8.3
305/40R22 XL	--	114	V	11J	1180	290	803	313	8.3
305/45R22 XL	--	118	V	10J	1320	290	833	303	8.3



LION SPORT HP

HP Tire With Excellent Handling Performance,
High Mileage And Low Noise

1. Good straight driving stability;
2. Comfortable and quiet ride;
3. Excellent handling performance;
4. Enhanced wet grip to effectively reduce risk of hydroplaning.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
165/55R14	--	72	V	5J	355	250	538	170	7.4
185/60R14	--	82	H	5 1/2J	475	250	578	189	7.7
185/60R15	--	84	H	5 1/2J	500	250	603	189	7.7
185/65R15	--	88	H	5 1/2J	560	250	621	189	7.7
185/70R14	--	88	H	5 1/2J	560	250	616	189	7.7
195/50R15	--	82	V	6J	475	250	577	201	7.7
195/55R15	--	85	V	6J	515	250	595	201	7.7
195/60R15	--	88	H	6J	560	250	615	201	7.7
195/65R15	--	91	H	6J	615	250	635	201	7.7
195/70R14	--	91	H	6J	615	250	630	201	7.7
205/55R16	--	91	H	6 1/2J	615	250	632	214	7.7
205/60R15	--	91	H	6J	615	250	627	209	7.7
205/60R16	--	92	H	6J	630	250	652	209	7.7
205/65R15	--	94	H	6J	670	250	647	209	7.7
215/55R17	--	94	V	7J	670	250	668	226	7.7
215/60R15	--	94	H	6 1/2J	670	250	639	221	7.7
215/60R16	--	95	H	6 1/2J	690	250	664	221	7.7
215/60R17	--	96	H	6 1/2J	710	250	690	221	7.7
215/65R15	--	96	H	6 1/2J	710	250	661	221	7.7
215/65R16	--	98	H	6 1/2J	750	250	686	221	7.7
215/65R17	--	99	H	6 1/2J	775	250	712	221	7.7
225/55R16	--	95	V	7J	690	250	654	233	7.7
225/55R17	--	97	H	7J	730	250	680	233	8.5
225/55R18	--	98	H	7J	750	250	705	233	8.5
225/60R16	--	98	H	6 1/2J	750	250	676	228	8.5
225/60R17	--	99	H	6 1/2J	775	250	702	228	8.5
225/65R16	--	100	H	6 1/2J	800	250	698	228	8.5
225/65R17	--	102	H	6 1/2J	850	250	724	228	8.5
225/70R16	--	103	H	6 1/2J	875	250	722	228	8.5
235/55R17	--	99	H	7 1/2J	775	250	690	245	8.5
235/60R16	--	100	H	7J	800	250	688	240	8.5
235/60R17	--	102	H	7J	850	250	714	240	8.5
235/65R16	--	103	H	7J	875	250	712	240	8.5
235/65R17	--	104	H	7J	900	250	738	240	8.5
235/65R18	--	106	H	7J	950	250	763	240	8.5
255/70R15	--	108	S	7 1/2J	1000	250	739	260	9.1



LION SPORT GP

Super Wear Resistance

- 1.Ultra mileage tire.
- 2.Low noise.
- 3.Improved water evacuation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
165/60R13	--	73	T	5.00B	365	250	528	170	8.7
175/65R14	--	82	T	5J	475	250	584	177	7.7
175/70R12	--	80	H	5.00B	450	250	551	177	7.7
175/70R13	--	82	T	5.00B	475	250	576	177	7.7
185/65R14	--	86	T	5 1/2J	530	250	596	189	7.7
185/65R15	--	88	T	5 1/2J	560	250	621	189	7.7
185/70R13	--	86	T	5.50B	530	250	590	189	7.7
185/70R14	--	88	T	5 1/2J	560	250	616	189	7.7
195/50R15	--	82	H	6J	475	250	577	201	8.5
195/60R15	--	88	H	6J	560	250	615	201	8.5
195/65R15	--	91	H	6J	615	250	635	201	8.5
195/70R14	--	91	T	6J	615	250	630	201	7.8
205/55R16	--	91	H	6 1/2J	615	250	632	214	8.5
205/60R15	--	91	H	6J	615	250	627	209	8.5
205/60R16	--	92	H	6J	630	250	652	209	8.7
205/65R15	--	94	H	6J	670	250	647	209	8.5
205/65R16	--	95	H	6J	690	250	672	209	8.5
205/70R15	--	96	T	6J	710	250	669	209	8.5
205/75R15	--	97	S	5 1/2J	730	250	689	203	8.5
215/60R16	--	95	H	6 1/2J	690	250	664	221	8.8
215/65R16	--	98	H	6 1/2J	750	250	686	221	8.7
215/70R15	--	98	T	6 1/2J	750	250	683	221	8.5
215/70R16	--	100	T	6 1/2J	800	250	708	221	8.7
215/75R15	--	100	S	6J	800	250	703	216	8.5
225/60R16	--	98	H	6 1/2J	750	250	676	228	8.7
225/65R16	--	100	H	6 1/2J	800	250	698	228	8.7
225/70R15	--	100	T	6 1/2J	800	250	697	228	8.7
225/70R16	--	107	H	6 1/2J	975	290	722	228	8.7
225/75R15	--	102	S	6J	850	250	719	223	8.7
235/70R16	--	106	H	7J	950	250	736	240	8.7
235/75R15	--	105	S	6 1/2J	925	250	733	235	8.7
245/70R16	--	107	H	7J	975	250	750	248	8.7
245/75R16	--	111	H	7J	1090	250	774	248	8.7
255/70R16	--	111	S	7 1/2J	1090	250	764	260	8.7
265/70R16	--	112	S	8J	1120	250	778	272	8.7
265/75R16	--	116	T	7 1/2J	1250	250	804	267	8.7



GL699

High Performance Tire
Excellent traction and handling performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
195/50R15	--	82	V	6J	475	250	577	201	7.8
235/60R15	--	98	H	7J	750	250	663	240	7.8



LL700

Good Drainage, Low Noise


1. Excellent wet handling performance.
2. Good driving stability.
3. Improved wear resistance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
155/70R13	--	75	T	4 1/2J	387	250	548	157	7.4
175/70R13	--	82	T	5.00B	475	250	576	177	6.0
175/70R14	--	84	T	5J	500	250	602	177	6.0
185/70R13	--	86	T	5 1/2J	530	250	590	189	6.0
185/70R14	--	88	T	5 1/2J	560	250	616	189	6.0
195/70R14	--	91	T	6J	615	250	630	201	6.0
205/70R15	--	96	T	6J	710	250	669	209	8.0
215/70R14	--	96	T	6 1/2J	710	250	658	221	8.0
215/70R15	--	98	T	6 1/2J	750	250	683	221	8.0

SUV

Tire

LINGLONG johnny_zhang 192.168.56.90 2020-10-26 11:05:52

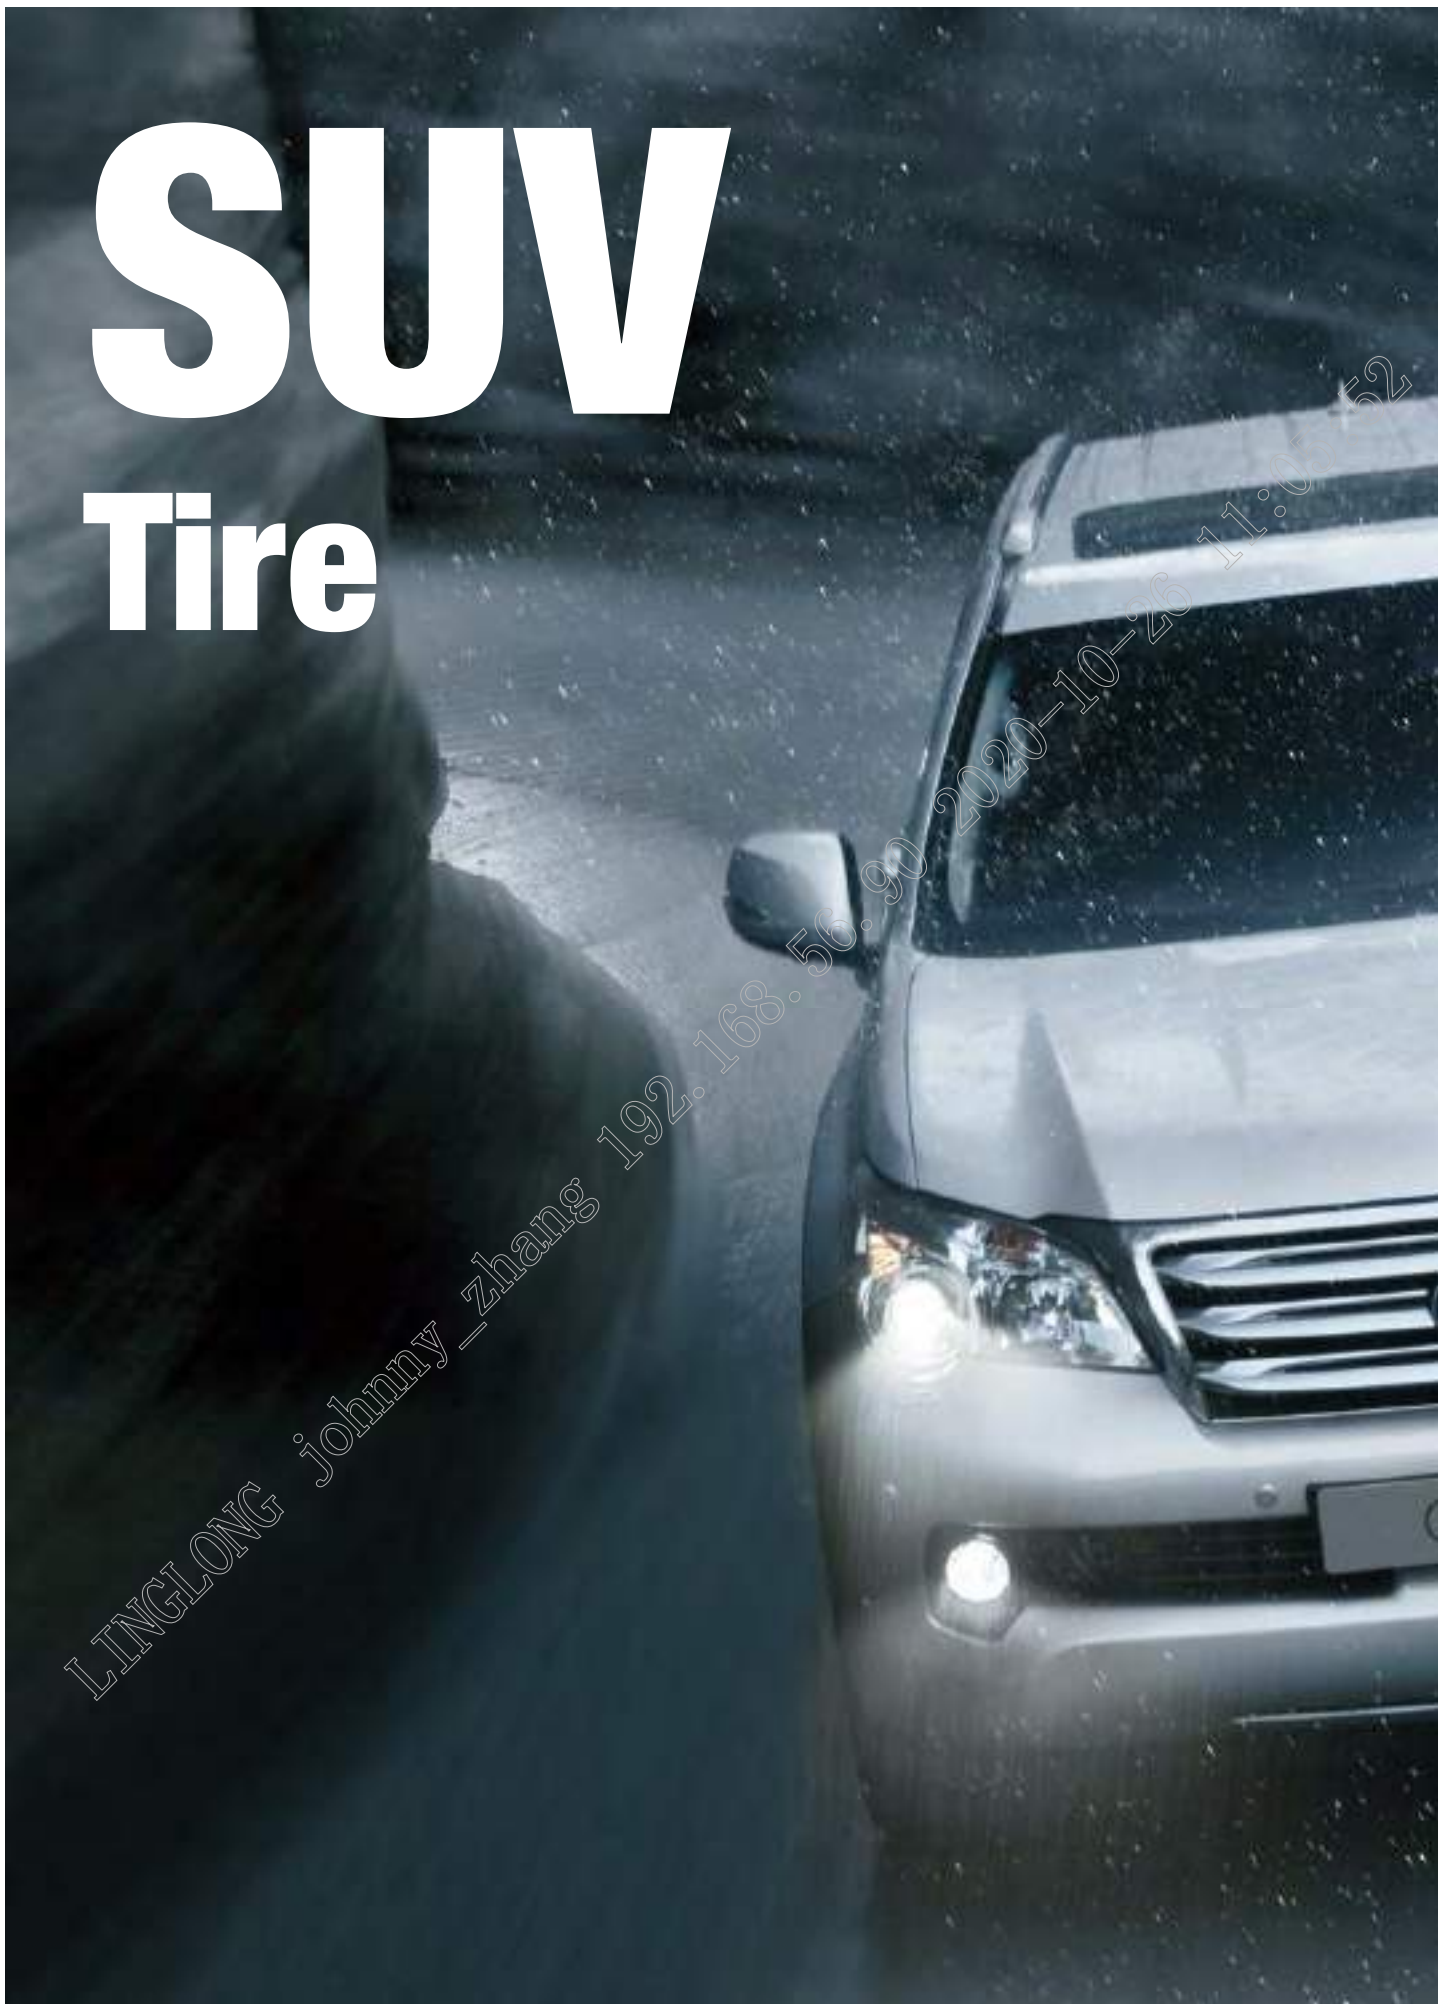



NOVA-FORCE 4X4 HP

SUV Tires For Urban Road Use,
With Good Handling And Low Noise.

- 1.Low rolling resistance for better fuel efficiency.
- 2.Good drainage performance to effectively reduce risk of hydroplaning.
- 3.Superior longitudinal stability for more comfortable ride.
- 4.Low noise to offer a quiet ride.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205/70R15	--	96	H	6J	710	250	669	209	8.5
215/55R18 XL	--	99	V	7J	775	290	693	226	7.7
215/60R17	--	96	H	6 1/2J	710	250	690	221	8.5
215/65R16 XL	--	102	H	6 1/2J	850	290	686	221	8.5
215/70R16	--	100	H	6 1/2J	800	250	708	221	8.5
225/55R17 XL	--	101	V	7J	825	290	680	233	8.2
225/55R18	--	98	V	7J	750	250	705	233	7.7
225/55R19	--	99	V	7J	775	250	731	233	8
225/60R17	--	99	V	6 1/2J	775	250	702	228	7.7
225/60R18	--	100	H	6 1/2J	800	250	727	228	8.5
225/65R16	--	100	H	6 1/2J	800	250	698	228	8.5
225/65R17	--	102	H	6 1/2J	850	250	724	228	8.5
225/75R16	--	104	H	6J	900	250	744	223	8.5
235/50R18	--	97	V	7 1/2J	730	250	693	245	8.1
235/55R17 XL	--	103	V	7 1/2J	875	290	690	245	8.2
235/55R18 XL	--	104	V	7 1/2J	900	290	715	245	8.2
235/60R16	--	100	H	7J	800	250	688	240	8.5
235/60R17 XL	--	106	V	7J	950	290	714	240	8.5
235/60R18 XL	--	107	V	7J	975	290	739	240	8.5
235/65R17 XL	--	108	V	7J	1000	290	738	240	8.5
235/70R16	--	106	H	7J	950	250	736	240	8.5
245/65R17 XL	--	111	H	7J	1090	290	750	248	8.5
245/70R16 XL	--	111	H	7J	1090	290	750	248	8.5
255/50R19 XL	--	107	W	8J	975	290	739	265	8.1
255/55R18 XL	--	109	V	8J	1030	290	737	265	8.2
255/55R19 XL	--	111	V	8J	1090	290	763	265	8.2
255/60R17	--	106	H	7 1/2J	950	250	738	260	8.5
255/60R18 XL	--	112	V	7 1/2J	1120	290	763	260	8.5
255/65R17	--	110	H	7 1/2J	1060	250	764	260	8.5
265/50R20 XL	--	111	V	8 1/2J	1090	290	774	277	7.5
265/60R18	--	110	H	8J	1060	250	775	272	7.5
265/65R17	--	112	H	8J	1120	250	776	272	8.5
265/70R16	--	112	H	8J	1120	250	778	272	8.5
275/40R20 XL	--	106	V	9 1/2J	950	290	728	278	8.1
275/40R22 XL	--	107	W	9 1/2J	975	290	779	278	8.0
275/45R20 XL	--	110	V	9J	1060	290	756	273	8.1
275/55R17	--	109	V	8 1/2J	1030	250	734	284	8.2
275/60R18	--	113	H	8J	1150	250	787	279	8.5
275/70R16	--	114	H	8J	1180	250	792	279	8.5
285/35R22 XL	--	106	V	10J	950	290	759	290	8.1
295/35R21 XL	--	107	W	10 1/2J	975	290	739	301	8.0
315/35R20 XL	--	110	W	11J	1060	290	728	320	8.0



LION SPORT 4x4 HP

SUV Tires For Urban Highway Use,
With Good Handling And Low Noise.

- 1.Excellent handling performance.
- 2.Enhanced drainage performance to effectively reduce risk of hydroplaning.
- 3.Superior longitudinal stability for more comfortable ride.
- 4.Low noise to offer a quiet ride.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205/70R15	--	96	H	6J	710	250	669	209	8.5
205/70R16	--	97	V	6J	730	250	694	209	8.7
215/60R17	--	96	H	6 1/2J	710	250	690	221	8.5
215/65R16 XL	--	102	H	6 1/2J	850	290	686	221	8.5
215/70R16	--	100	H	6 1/2J	800	250	708	221	8.5
225/55R17 XL	--	101	V	7J	825	290	680	233	8.2
225/60R18	--	100	H	6 1/2J	800	250	727	228	8.5
225/65R16	--	100	H	6 1/2J	800	250	698	228	8.5
225/65R17	--	102	H	6 1/2J	850	250	724	228	8.5
225/75R16	--	104	H	6J	900	250	744	223	8.5
235/55R17 XL	--	103	V	7 1/2J	875	290	690	245	8.2
235/55R18 XL	--	104	V	7 1/2J	900	290	715	245	8.2
235/60R16	--	100	H	7J	800	250	688	240	8.5
235/60R17 XL	--	106	V	7J	950	290	714	240	8.5
235/60R18 XL	--	107	V	7J	975	290	739	240	8.5
235/65R17 XL	--	108	V	7J	1000	290	738	240	8.5
235/65R18	--	106	H	7J	950	250	763	240	8.5
235/70R16	--	106	H	7J	950	250	736	240	8.5
245/55R19	--	103	V	7 1/2J	875	250	753	253	8.7
245/60R18	--	105	V	7J	925	250	751	248	8.5
245/65R17 XL	--	111	H	7J	1090	290	750	248	8.5
245/70R16 XL	--	111	H	7J	1090	290	750	248	8.5
255/50R19 XL	--	107	W	8J	975	290	739	265	8.7
255/50R20 XL	--	109	V	8J	1030	290	764	265	8.7
255/55R18 XL	--	109	V	8J	1030	290	737	265	8.2
255/55R19 XL	--	111	V	8J	1090	290	763	265	8.5
255/60R17	--	106	H	7 1/2J	950	250	738	260	8.5
255/60R18	--	112	V	7 1/2J	1120	290	763	260	8.5
255/60R19	--	109	H	7 1/2J	1030	250	789	260	8.7
255/65R17	--	110	H	7 1/2J	1060	250	764	260	8.5
255/65R18	--	111	H	7 1/2J	1090	250	789	260	8.7
265/60R18	--	110	H	8J	1060	250	775	272	8.5
265/65R17	--	112	H	8J	1120	250	776	272	8.5
265/65R18	--	114	H	8J	1180	250	801	272	8.7
265/70R16	--	112	H	8J	1120	250	778	272	8.5
265/70R18	--	116	T	8J	1250	250	829	272	8.7
275/55R17	--	109	V	8 1/2J	1030	250	734	284	8.5
275/55R20 XL	--	117	V	8 1/2J	1285	290	810	284	8.7
275/60R18	--	113	H	8J	1150	250	787	279	8.5
275/65R18	--	116	H	8J	1250	250	815	279	8.7
275/70R16	--	114	H	8J	1180	250	792	279	8.5



LION SPORT H/T

SUV Tire For Urban Road Use, With Low Noise And Good.
Dry/wet Performance.

- 1.High drainage capability.
- 2.High comfort and low noise.
- 3.Excellent handling performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
215/70R16	--	100	T	6 1/2J	800	250	708	221	9.0
225/70R16 XL	--	107	T	6 1/2J	975	290	722	228	9.5
235/65R17	--	104	T	7J	900	250	738	240	8.7
235/70R16 XL	--	109	T	7J	1030	290	736	240	9.5
235/75R15 XL	--	109	T	6 1/2J	1030	290	733	235	8.7
245/65R17	--	107	T	7J	975	250	750	248	9.2
245/70R16	--	107	T	7J	975	250	750	248	9.5
245/70R16 XL	--	111	T	7J	1090	290	750	248	9.5
245/70R17	--	110	T	7J	1060	250	776	248	9.5
245/75R16	--	111	T	7J	1090	250	774	248	9.5
255/70R15	--	108	T	7 1/2J	1000	250	739	260	9.5
255/70R16	--	111	T	7 1/2J	1090	250	764	260	9.5
265/50R20 XL	--	111	V	8 1/2J	1090	290	774	277	9.0
265/50R20 XL	--	112	V	8 1/2J	1120	290	774	277	9.0
265/65R17	--	112	H	8J	1120	250	776	272	9.5
265/70R15	--	112	T	8J	1120	250	753	272	9.5
265/70R16	--	112	T	8J	1120	250	778	272	9.5
265/70R17	--	115	T	8J	1215	250	804	272	9.5
265/75R16	--	116	T	7 1/2J	1250	250	804	267	9.2
275/55R20 XL	--	117	V	8 1/2J	1285	290	810	284	9.0
275/65R17 XL	--	119	H	8J	1360	290	790	279	9.5
285/65R17	--	116	S	8 1/2J	1250	250	802	292	9.5
31X10.50R15LT	6PR	109	R	8 1/2J	1030	350	775	268	10.7
LT215/85R16	10PR	115/112	Q	6J	D 1120 S 1215	550	772	216	11.2
LT225/75R16	10PR	115/112	Q	6J	D 1120 S 1215	550	744	223	11.2
LT235/85R16	10PR	120/116	R	6 1/2J	D 1260 S 1380	550	806	235	11.2
LT245/75R16	10PR	120/116	R	7J	D 1260 S 1380	550	774	248	11.2
LT265/70R17	10PR	121/118	R	8J	D 1320 S 1450	550	804	272	11.2
LT265/70R18	10PR	124/121	R	8J	D 1450 S 1600	550	829	272	10.7
LT265/75R16	10PR	123/120	R	7 1/2J	D 1400 S 1550	550	804	267	11.2



LION SPORT A/T

All Terrain Tire With High Wear Resistance

- 1.Excellent wet performance.
- 2.Large angle grooves to improve self-cleaning ability.
- 3.An optimal balance between performance on road and off road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
205R16LT	8PR	110/108	T	6J	D 1000 S 1060	450	734	208	12.7
LT215/75R15	6PR	100/97	S	6J	D 730 S 800	350	703	216	11
LT215/85R16	10PR	115/112	Q	6J	D 1120 S 1215	550	772	216	11
LT225/75R16	10PR	115/112	Q	6J	D 1120 S 1215	550	744	223	11
LT235/75R15	6PR	104/101	R	6 1/2J	D 825 S 900	350	733	235	11
LT235/80R17	10PR	120/117	R	6 1/2J	D 1285 S 1400	550	808	235	11
LT235/85R16	10PR	120/116	Q	6 1/2J	D 1260 S 1380	550	806	235	12.7
LT245/70R17	10PR	119/116	Q	7J	D 1250 S 1360	550	776	248	11.9
LT245/75R16	10PR	120/116	Q	7J	D 1260 S 1380	550	774	248	12.7
LT245/75R17	10PR	121/118	R	7J	D 1320 S 1450	550	800	248	11.9
LT265/60R20	10PR	121/118	R	8J	D 1320 S 1450	550	826	272	11.9
LT265/70R17	10PR	121/118	R	8J	D 1320 S 1450	550	804	272	12.7
LT265/70R18	10PR	124/121	S	8J	D 1450 S 1600	550	829	272	11.9
LT265/75R16	10PR	123/120	R	7 1/2J	D 1400 S 1550	550	804	267	12.7
LT275/65R18	10PR	123/120	S	8J	D 1400 S 1550	550	815	279	11.9
LT275/65R20	10PR	126/123	S	8J	D 1550 S 1700	550	866	279	11.9
LT275/70R18	10PR	125/122	S	8J	D 1500 S 1650	550	843	279	11.9
LT285/55R20	10PR	122/119	S	9J	D 1360 S 1500	550	822	297	12.7
LT285/65R20	10PR	127/124	S	8 1/2J	D 1600 S 1750	550	878	292	12.7
LT285/70R17	8PR	121/118	S	8 1/2J	D 1320 S 1450	450	832	292	12.7
LT285/75R16	10PR	126/123	R	8J	D 1550 S 1700	550	834	286	12.7
LT305/70R16	10PR	124/121	R	9J	D 1450 S 1600	450	834	311	12.7
LT305/70R17	8PR	119/116	R	9J	D 1250 S 1360	350	860	311	12.7



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
30X9.50R15LT	6PR	104	S	7 1/2J	900	350	750	240	12.7
31X10.50R15LT	6PR	109	R	8 1/2J	1030	350	775	268	12.7
35X12.50R20LT	10PR	121	Q	10J	1450	450	877	318	12.7
235/70R16	--	106	T	7J	950	250	736	240	11.0
235/75R15 XL	--	109	T	6 1/2J	1030	290	733	235	11.0
245/65R17 XL	--	111	T	7J	1090	290	750	248	11.0
245/70R16 XL	--	111	T	7J	1090	290	750	248	11.0
245/75R16	--	111	T	7J	1090	250	774	248	10.3
255/70R16	--	111	S	7 1/2J	1090	250	764	260	10.3
265/65R17	--	112	T	8J	1120	250	776	272	10.3
265/70R15 WL	--	112	T	8J	1120	250	753	272	11.0
265/70R16	--	112	T	8J	1120	250	778	272	11.0
265/70R17	--	115	T	8J	1215	250	804	272	11.0
265/75R16	--	116	T	7 1/2J	1250	250	804	267	10.3
275/55R20	--	113	S	8 1/2J	1150	250	810	284	8.7
275/60R20	--	115	T	8J	1215	250	838	279	8.7
275/65R18	--	116	T	8J	1250	250	815	279	10.3
P285/70R17	--	117	T	8 1/2J	1285	250	832	292	10.3



LION SPORT M/T

Mud-Terrain Tire

- 1.High floatation.
- 2.Higher load-carrying capacity.
- 3.Excellent self-cleaning performance.
- 4.Aggressive tread pattern and sidewall design.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
265/70R15 OWL	--	112	T	8J	1120	250	753	272	11.7
265/75R15 OWL	--	112	Q	7 1/2J	1120	250	779	267	11.7
205R16LT OWL	8PR	110/108	Q	6J	D 1000 S 1060	450	740	208	13.7
LT215/75R15 OWL	6PR	100/97	Q	6J	D 730 S 800	350	709	216	13.7
LT225/75R16 OWL	8PR	110/107	Q	6J	D 975 S 1060	450	750	223	13.7
LT235/75R15 OWL	6PR	104/101	Q	6 1/2J	D 825 S 900	350	739	235	13.7
LT235/80R17 OWL	10PR	120/117	Q	6 1/2J	D 1285 S 1400	550	814	235	13.7
LT235/85R16 OWL	10PR	120/116	Q	6 1/2J	D 1260 S 1380	550	812	235	13.7
LT245/75R16 OWL	10PR	120/116	Q	7J	D 1260 S 1380	550	780	248	13.7
LT255/70R16 OWL	8PR	115/112	Q	7 1/2J	D 1120 S 1215	450	770	260	14.4
LT265/65R17 OWL	10PR	120/117	Q	8J	D 1285 S 1400	550	782	272	14.4
LT265/70R16 OWL	6PR	110/107	Q	8J	D 975 S 1060	350	784	272	14.4
LT265/70R17 OWL	10PR	121/118	Q	8J	D 1320 S 1450	550	810	272	14.4
LT265/75R16 OWL	10PR	123/120	Q	7 1/2J	D 1400 S 1550	550	810	267	14.7
LT275/70R18 OWL	10PR	125/122	Q	8J	D 1500 S 1650	550	849	279	14.4
LT285/55R20 OWL	10PR	122/119	Q	9J	D 1360 S 1500	550	828	297	14.7
LT285/65R20 OWL	10PR	127/124	Q	8 1/2J	D 1600 S 1750	550	884	292	14.4
LT285/70R17 OWL	10PR	121/118	Q	8 1/2J	D 1320 S 1450	550	838	292	14.4
LT285/75R16 OWL	10PR	126/123	Q	8J	D 1550 S 1700	550	840	286	14.4
LT305/70R16 OWL	10PR	124/121	Q	9J	D 1450 S 1600	450	840	311	14.4
LT305/70R17 OWL	8PR	119/116	Q	9J	D 1250 S 1360	350	866	311	14.4
LT315/75R16 OWL	10PR	127/124	Q	8 1/2J	D 1600 S 1750	450	884	313	14.4
30X9.50R15LT OWL	6PR	104	Q	7 1/2J	900	350	756	240	13.7
31X10.50R15LT OWL	6PR	109	Q	8 1/2J	1030	350	781	268	14.3
33X12.50R15LT OWL	6PR	108	Q	10J	1000	250	832	318	14.3
33X12.50R18LT OWL	10PR	118	Q	10J	1320	450	832	318	15.8
33X12.50R20LT OWL	10PR	114	Q	10J	1180	450	832	318	15.8
33X12.50R22LT	10PR	109	Q	10J	1030	450	826	318	15.8
35X12.50R17LT OWL	10PR	121	Q	10J	1450	450	883	318	15.8
35X12.50R18LT OWL	10PR	123	Q	10J	1550	450	883	318	15.8
35X12.50R20LT OWL	10PR	121	Q	10J	1450	450	883	318	15.8
35X12.50R22LT OWL	10PR	117	Q	10J	1285	450	877	318	15.8
38X15.50R20LT OWL	8PR	125	Q	12 1/2J	1650	350	959	395	15.9



LMB3

All Terrain Tire

- 1.Excellent traction and handling performance.
- 2.Excellent wear resistance performance.
- 3.All Terrain Tire.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
195/70R15C	8PR	99/96	R	6J	D710 S775	450	655	201	10.2
195/70R15C (WHITE)	8PR	104/102	R	6J	D850 S900	450	655	201	10.2
215/75R15	--	100	S	6J	800	250	703	216	9.2
235/75R15	--	105	S	6 1/2J	925	250	733	235	9.2



RADIAL620

All Terrain Tire

- 1.Excellent wet performance.
- 2.An optimal balance between performance on road and off road.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
185R14C	8PR	102/100	Q	5 1/2J	D 800 S 850	450	652	189	8.7
195R14C	8PR	106/104	Q	5 1/2J	D 875 S 925	450	668	196	8.9
205/70R15	--	96	H	6J	710	250	669	209	8.0
205/80R16 XL	--	104	T	5 1/2J	900	280	734	203	8.0
215/65R16	--	98	H	6 1/2J	750	250	686	221	10.2
215/70R16	--	100	T	6 1/2J	800	250	708	221	8.0
225/75R16 XL	--	108	R	6J	1000	290	744	223	9.2
235/65R17 XL	--	108	H	7J	1000	290	738	240	10.2
235/70R16	--	106	T	7J	950	250	736	240	10.2
245/70R16	--	107	H	7J	975	250	750	248	10.2
245/70R16 XL	--	111	H	7J	1090	290	750	248	10.2
265/70R15	--	112	T	8J	1120	250	753	272	10.2
265/70R16	--	112	H	8J	1120	250	778	272	10.2
275/55R17	--	109	V	8 1/2J	1030	250	734	284	10.2

Light Truck Tire



LINGLONG Johnny Zhang 192.168.56.90 2020-12-06 11:06:01



NOVA-FORCE Van

Commercial Tire With High Grip Performance

1. Better grip performance.
2. Low rolling resistance for high energy efficiency.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
5.00R12LT	10PR	88/86	P	3.50B	D 530 S 560	550	568	143	7.7
155R12C	8PR	88/86	N	4.50B	D 530 S 560	450	553	157	8.0
155R13C	8PR	91/89	P	4 1/2J	D 580 S 615	450	578	157	8.0
165/70R14C	6PR	89/87	R	5J	D 545 S 580	375	588	170	8.0
175R13C	8PR	97/95	Q	5.00B	D 690 S 730	450	610	177	8.3
175/70R14C	6PR	95/93	T	5J	D 650 S 690	375	602	177	8.0
185R14C	8PR	102/100	R	5 1/2J	D 800 S 850	450	650	188	8.8
185/75R16C	8PR	104/102	R	5J	D 850 S 900	475	684	184	9.3
195R14C	8PR	106/104	P	5 1/2J	D 900 S 950	450	666	198	9.0
195R15C	8PR	106/104	R	5 1/2J	D 900 S 950	450	693	196	9.2
195/70R15C	8PR	104/102	R	6J	D 850 S 900	450	655	201	9.8
195/75R16C	8PR	107/105	R	5 1/2J	D 925 S 975	475	698	196	9.8
205R14C	8PR	109/107	R	6J	D 975 S 1030	450	686	208	9.3
205/70R15C	8PR	106/104	S	6J	D 900 S 950	450	669	209	9.3
205/75R16C	8PR	110/108	R	5 1/2J	D 1000 S 1060	475	714	203	9.3
215R14C	8PR	112/110	R	6J	D 1060 S 1120	450	700	216	9.2
215/70R15C	8PR	109/107	R	6 1/2J	D 975 S 1030	450	683	221	9.2
215/70R16C	6PR	108/106	T	6 1/2J	D 950 S 1000	375	708	221	9.3
215/75R16C	8PR	113/111	R	6J	D 1090 S 1150	475	728	216	9.8
225/70R15C	8PR	112/110	R	6 1/2J	D 1060 S 1120	450	697	228	9.8
225/75R16C	10PR	121/120	R	6J	D 1400 S 1450	575	744	223	9.8
255/70R15C	6PR	112/110	S	7 1/2J	D 1060 S 1120	375	739	260	9.7



NOVA-FORCE VAN^{HP}

Commercial Tire With High Grip Performance

- 1.Excellent stability.
- 2.Great grip performance and driving force of turning.
- 3.Low rolling resistance for higher energy efficiency.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
175/65R14C	6PR	90/88	T	5J	D 560 S 600	375	584	177	7.7
195/65R16C	8PR	104/102	R	6J	D 850 S 900	475	660	201	9.0
205/65R16C	8PR	107/105	R	6J	D 925 S 975	475	672	209	9.2
215/60R16C	6PR	103/101	T	6 1/2J	D 825 S 875	375	664	221	9.2
215/65R15C	6PR	104/102	T	6 1/2J	D 850 S 900	375	661	221	9.2
215/65R16C	8PR	109/107	R	6 1/2J	D 975 S 1030	475	686	221	9.2
225/65R16C	8PR	112/110	R	6 1/2J	D 1060 S 1120	475	698	228	9.2
235/65R16C	8PR	115/113	R	7J	D 1150 S 1215	475	712	240	9.2



R701

Budget Tire

- 1.Low fuel consumption.
- 2.Budget Tires.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
155/70R12	—	73	S	4.50B	365	250	523	157	6.2
165/55R14	—	72	H	5J	355	250	538	170	6.2
175/70R13	—	82	H	5.00B	475	250	576	177	6.2
175/65R14	—	82	H	5J	475	250	584	177	6.2
185/60R14	—	82	H	5 1/2J	475	250	578	189	6.2
185/70R13	—	86	N	5 1/2J	530	250	590	189	6.2
195/55R15	—	85	H	6J	515	250	595	201	6.2
195/60R15	—	88	H	6J	560	250	615	201	6.2
155/70R12C	—	104/102	N	4 1/2J	D 850 S 900	625	523	157	6.7
165R13C	8PR	96/94	N	4 1/2J	D 670 S 710	450	596	167	6.7
185R14C	—	104/102	N	5 1/2J	D 850 S 900	500	650	188	6.7
185/60R12C	—	104/101	N	5 1/2J	D 825 S 900	650	527	189	6.7
195/50R13C	—	104/101	N	6J	D 825 S 900	650	526	201	6.7
195/55R10C	—	98/96	N	6J	D 710 S 750	625	468	201	6.7
195/60R12C	—	104/102	N	6J	D 850 S 900	650	539	202	6.7



RADIAL666

Commercial Tire With Excellent Wear And Wet Performance

- 1.Excellent traction.
- 2.Excellent wet braking.
- 3.High wear resistance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
145R12LT	8PR	86/84	Q	4J	D 500 S 530	450	537	145	7.70
155R12C	6PR	83/81	N	4.50B	D 462 S 487	350	553	157	7.8
165/70R14C	6PR	89/87	R	5J	D 545 S 580	375	588	170	8.3
175R13LT	8PR	97/95	Q	5.00B	D 690 S 730	450	609	182	7.8
175/75R16C	8PR	101/99	R	5J	D 775 S 825	475	668	177	8.3
185R14C	8PR	102/100	R	5 1/2J	D 800 S 850	450	652	189	9.5
185R14LT	8PR	102/100	R	5 1/2J	D 800 S 850	450	652	189	9.5
185/75R16C	8PR	104/102	R	5J	D 850 S 900	475	684	184	8.3
195R14C	8PR	106/104	P	5 1/2J	D 875 S 925	450	668	196	9.7
195R15C	8PR	106/104	R	5 1/2J	D 900 S 950	450	693	196	8.5
195/65R16C	8PR	104/102	R	6J	D 850 S 900	475	660	201	9.2
195/70R15C	10PR	104/102	R	6J	D 850 S 900	550	655	201	10.2
195/75R14C	8PR	106/104	R	5 1/2J	D 900 S 950	475	648	196	9.7
195/75R16C	8PR	107/105	R	5 1/2J	D 925 S 975	475	698	196	9.7
205/65R16C	8PR	107/105	R	6J	D 925 S 975	475	672	209	9.2
205/70R15C	8PR	106/104	S	6J	D 900 S 950	450	669	209	9.2
205/75R14C	8PR	109/107	R	5 1/2J	D 975 S 1030	475	664	203	9.2
205/75R16C	8PR	110/108	R	5 1/2J	D 1000 S 1060	475	714	203	9.2
215R14C	8PR	110/108	R	6J	D 1000 S 1060	450	700	218	9.7
215/65R16C	8PR	109/107	R	6 1/2J	D 975 S 1030	475	686	221	9.2
215/70R15C	8PR	109/107	R	6 1/2J	D 975 S 1030	450	683	221	9.7
215/75R14C	8PR	112/110	R	6J	D 1060 S 1120	475	678	216	9.7
215/75R16C	8PR	107/104	R	6J	D 900 S 975	450	728	216	9.2
225/65R16C	8PR	112/110	R	6 1/2J	D 1060 S 1120	475	698	228	9.3
225/70R15C	8PR	112/110	R	6 1/2J	D 1060 S 1120	450	697	228	9.2
225/75R16C	10PR	121/120	R	6J	D 1400 S 1450	575	744	223	9.2
235/65R16C	8PR	115/113	R	7J	D 1150 S 1215	475	712	240	9.2



RADIAL616

Increased Mileage With High Wear Resistance

- 1.Excellent traction and handling performance.
- 2.Excellent wear resistance performance.
- 3.All Terrain Tire.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
215R15C	8PR	111/109	T	6J	D 1030 S 1090	450	725	216	10.2
30X9.50R15LT	6PR	104	Q	7 1/2J	900	350	750	240	11.2
31X10.50R15LT	6PR	109	Q	8 1/2J	1030	350	775	268	11.2



LMC4

Increased Mileage With High Wear Resistance

Excellent wear resistance performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
6.50R16C	10PR	107/103	N	5.50F	D 860 S 975	560	750	185	9.7
6.50R16C	12PR	110/105	M	5.50F	D 925 S 1060	670	750	185	9.7
7.00R15LT	10PR	110/105	L	5.50F	D 925 S 1060	560	750	200	9.7
7.50R16LT	10PR	116/112	L	6.00G	D 1120 S 1250	560	808	220	11.2
7.50R16LT	12PR	120/116	M	5.50F	D 1250 S 1400	670	742	176	11.2
7.50R16LT	14PR	122/118	L	6.00G	D 1320 S 1500	770	808	220	11.2



LMC5

Increased Mileage With High Wear Resistance

- 1.Freight vehicles.
- 2.High mileage.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
185R14C	8PR	102/100	N	5 1/2J	D 800 S 850	450	652	189	10.2
185R14C	8PR	102/100	Q	5 1/2J	D 800 S 850	450	652	189	10.2
195R14LT	8PR	106/104	P	5 1/2J	D 900 S 950	450	668	196	10.2



LMC7

All Terrain Tire

Excellent wear resistance performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
195R15C	8PR	106/104	Q	5 1/2J	D 900 S 950	450	690	198	9.7
195R15C (WHITE)	8PR	106/104	Q	5 1/2J	D 900 S 950	450	690	198	9.7



LMC8

Excellent Wear Resistance Performance
High steering and abrasion performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
195R14C	8PR	106/104	P	5 1/2J	D 900 S 950	450	668	196	9.2
195R14C (WHITE)	8PR	106/104	P	5 1/2J	D 900 S 950	450	668	196	9.2
205R14C	8PR	109/107	R	6 J	D 975 S 1030	450	684	208	9.2
205R15C	8PR	110/108	R	6 J	D 1000 S 1060	450	711	209	9.2
205R15C (WHITE)	8PR	110/108	R	6 J	D 1000 S 1060	450	711	209	9.2



LMB3

All Terrain Tire
1.Excellent traction and handling performance.
2.Excellent wear resistance performance.
3.All Terrain Tire.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
195/70R15C	8PR	99/96	R	6J	D710 S775	450	655	201	10.2
195/70R15C (WHITE)	8PR	104/102	R	6J	D850 S900	450	655	201	10.2

Winter Tire





NEW

Winter Defender Ice I-15

Outstanding Handling Performance

1. Direction tread pattern design providing excellent handling performance.
2. Directional grooves to help evacuate snow and mud.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
175/65R14 XL	--	86	T	5J	530	290	584	177	8.7
185/60R15 XL	--	88	T	5 1/2J	560	290	603	189	8.7
185/65R15 XL	--	92	T	5 1/2J	630	290	621	189	8.7
195/55R16 XL	--	91	T	6J	615	290	620	201	8.7
195/65R15 XL	--	95	T	6J	690	290	635	201	8.7
205/50R17 XL	--	93	T	6 1/2J	650	290	638	223	8.7
205/55R16 XL	--	94	T	6 1/2J	670	290	632	214	8.7
205/60R16 XL	--	96	T	6J	710	290	652	209	8.7
215/55R16 XL	--	97	T	7J	730	290	642	226	8.7
215/60R16 XL	--	99	T	6 1/2J	775	290	664	221	8.7
215/65R16 XL	--	102	T	6 1/2J	850	290	686	221	8.7
225/45R17 XL	--	94	T	7 1/2J	670	290	634	225	8.7
225/50R17 XL	--	98	T	7J	750	290	658	233	8.7
225/55R16 XL	--	99	T	7J	775	290	654	233	8.7
225/55R17 XL	--	101	T	7J	825	290	680	233	8.7
235/45R17 XL	--	97	T	8J	730	290	644	236	8.7



NEW

Winter Defender Ice I-15 SUV

Outstanding Handling Performance

1. Directional grooves design for evacuate snow and mud.
2. Complex soft tread compound and 3D sipes technology to promote handling performance on ice and snow condition.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
215/60R17	--	96	T	6 1/2J	710	250	690	221	9.7
215/65R16	--	98	T	6 1/2J	750	250	686	221	9.7
225/55R18	--	98	T	7J	750	250	705	233	9.7
225/65R17 XL	--	106	T	6 1/2J	950	290	724	228	9.7
235/55R19 XL	--	105	H	7 1/2J	925	290	741	245	9.7
235/60R18 XL	--	107	T	7J	975	290	739	240	9.7
235/65R17 XL	--	108	T	7J	1000	290	738	240	10
245/55R19	--	103	T	7 1/2J	875	250	753	253	9.7
245/70R16	--	107	H	7J	975	250	750	248	9.7
255/50R20 XL	--	109	H	8J	1030	290	764	265	9.7
255/60R18 XL	--	112	H	7 1/2J	1120	290	763	260	9.7
265/65R17	--	112	T	8J	1120	250	776	272	9.7
285/60R18	--	116	T	8 1/2J	1250	250	799	292	9.7



Winter Defender UHP

Ultra High Performance Snow Tires With Superior Handling Performance

1.Excellent snow handling performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
185/55R15 XL	--	86	H	6J	530	290	585	194	8.5
195/50R15	--	82	H	6J	475	250	577	201	8.5
195/55R15	--	85	H	6J	515	250	595	201	8.8
195/55R16 XL	--	91	H	6J	615	290	620	201	8.8
205/45R17 XL	--	88	V	7J	560	290	616	206	8.8
205/50R17 XL	--	93	V	6 1/2J	650	290	638	214	8.8
215/45R17 XL	--	91	V	7J	615	290	626	213	8.8
215/50R17 XL	--	95	V	7J	690	290	648	226	8.8
215/55R17	--	94	V	7J	670	250	668	226	8.8
225/40R18 XL	--	92	V	8J	630	290	637	230	8.8
225/45R17 XL	--	94	V	7 1/2J	670	290	634	225	8.8
225/50R17 XL	--	98	V	7J	750	290	658	233	8.8
225/55R16 XL	--	99	H	7J	775	290	654	233	8.8
225/55R17 XL	--	101	V	7J	825	290	680	233	8.8
225/60R16 XL	--	102	H	6 1/2J	850	290	676	228	8.8
235/45R18 XL	--	98	V	8J	750	290	669	236	8.8
235/55R17 XL	--	103	V	7 1/2J	875	290	690	245	8.8
235/55R19 XL	--	105	V	7 1/2J	925	290	741	245	8.3
245/40R18 XL	--	97	V	8 1/2J	730	290	653	248	8.8
245/40R19 XL	--	98	V	8 1/2J	750	290	679	248	8.3
245/45R19 XL	--	102	V	8J	850	290	703	243	8.3
255/35R19 XL	--	96	V	9J	710	290	661	260	8.3
255/40R19 XL	--	100	V	9J	800	290	687	260	8.3
275/40R19 XL	--	105	V	9 1/2J	925	290	703	278	8.3
275/40R20 XL	--	106	V	9 1/2J	950	290	728	278	8.3



Winter Defender HP

High Performance Snow Tires With Excellent Braking Performance

1. Excellent snow braking performance.
2. Comfortably snow driving.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
155/65R14	--	75	T	4 1/2J	387	250	558	157	8.2
155/70R13	--	75	T	4.50B	387	250	548	157	8.2
155/80R13	--	79	T	4.50B	437	240	578	157	8.2
165/65R14	--	79	T	5J	437	250	570	170	8.2
165/70R13	--	79	T	5.00B	437	250	562	170	8.2
165/70R14	--	81	T	5J	462	250	588	170	8.2
175/65R14 XL	--	86	H	5J	530	290	584	177	8.2
175/65R15 XL	--	88	H	5J	560	290	609	177	8.0
175/70R13	--	82	T	5J	475	250	576	177	8.2
175/70R14	--	84	T	5J	500	250	602	177	8.2
185/60R14	--	82	T	5 1/2J	475	250	578	189	8.5
185/60R15 XL	--	88	H	5 1/2J	560	290	603	189	8.5
185/65R14	--	86	T	5 1/2J	530	250	596	189	8.5
185/65R15XL	--	92	H	5 1/2J	630	290	621	189	8.5
195/60R15 XL	--	92	H	6J	630	290	615	201	8.5
195/65R15 XL	--	95	T	6J	690	290	635	201	8.5
205/55R16 XL	--	94	H	6 1/2J	670	290	632	214	8.2
205/60R16 XL	--	96	H	6J	710	290	652	209	8.5
205/65R15 XL	--	99	H	6J	775	290	647	209	8.5
205/70R15	--	96	T	6J	710	250	669	209	8.5
215/55R16 XL	--	97	H	7J	730	290	642	226	8.5
215/60R16 XL	--	99	H	6 1/2J	775	290	664	221	8.5
215/65R16	--	98	H	6 1/2J	750	250	686	221	8.5



Winter Defender Grip

Studdable Snow Tire With Outstanding Braking Performance
On Ice&Snow Condition

- 1.Designed for ice and snow surface.
- 2.Directional tread pattern design for excellent snow traction performance.
- 3.Great grip and handling performance on ice and snow surface.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
155/70R13	--	75	T	4.50B	387	250	548	157	9.7
155/80R13	--	79	T	4.50B	437	240	578	157	9.7
165/70R13	--	79	Q	5.00B	437	250	562	170	9.7
175/65R14 XL	--	86	T	5J	530	290	584	177	9.7
175/70R13	--	82	T	5.00B	475	250	576	177	9.7
185/55R15 XL	--	86	T	6J	530	290	585	194	9.7
185/60R14	--	82	T	5 1/2J	475	250	578	189	9.7
185/65R14 XL	--	90	T	5 1/2J	600	290	596	189	9.7
185/65R15	--	88	T	5 1/2J	560	250	621	189	9.7
185/70R14 XL	--	92	T	5 1/2J	630	290	616	189	9.7
195/60R15 XL	--	92	T	6J	630	290	615	201	9.7
195/65R15 XL	--	95	T	6J	690	290	635	201	9.7
205/55R16 XL	--	94	T	6 1/2J	670	290	632	214	9.7
205/60R16 XL	--	96	T	6J	710	290	652	209	9.7
205/65R15 XL	--	99	T	6J	775	290	647	209	9.7
215/50R17 XL	--	95	T	7J	690	290	648	226	9.7
215/55R16 XL	--	97	T	7J	730	290	642	226	9.7
215/55R17 XL	--	98	T	7J	750	290	668	226	9.7
215/60R16	--	95	T	6 1/2J	690	250	664	221	9.7
215/65R16	--	98	T	6 1/2J	750	250	686	221	9.7
225/45R17 XL	--	94	T	7 1/2J	670	290	634	225	9.7
225/55R17	--	97	T	7J	730	250	680	233	9.7



Winter Defender Grip^{SUV}

Studdable Snow Tire With Outstanding Braking Performance
On Ice&Snow Condition

- 1.Designed for ice and snow surface.
- 2.Excellent snow traction performance with directional tread pattern design.
- 3.Great grip and handling performance on ice and snow surface.
- 4.Designed for SUVs.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
225/55R18	--	98	T	7J	750	250	705	233	9.7
225/65R17 XL	--	106	T	6 1/2J	950	290	724	228	9.7
235/60R17 XL	--	106	T	7J	950	290	714	240	9.7
235/65R17 XL	--	108	T	7J	1000	290	738	240	9.7
255/55R18 XL	--	109	T	8J	1030	290	737	265	9.7
275/45R20 XL	--	110	T	9J	1060	290	756	273	9.7
275/55R20 XL	--	117	T	8 1/2J	1285	290	810	284	9.7
275/60R18 XL	--	117	T	8J	1285	290	787	279	9.7
265/70R17	--	115	T	8J	1215	250	804	272	9.7



Winter Defender Van

Excellent Snow Traction Performance

- 1.Excellent snow traction performance.
- 2.Focus on driving safety of vehicles in winter.


Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
175/75R16C	8PR	101/99	R	5J	D 775 S 825	475	668	177	9.8
185R14C	8PR	102/100	Q	6J	D 800 S 850	450	652	189	9.8
185/75R16C	8PR	104/102	R	5J	D 850 S 900	475	684	184	9.8
195R14C	8PR	106/104	P	5 1/2J	D 900 S 950	450	666	198	10.0
195/70R15C	8PR	104/102	R	6J	D 850 S 900	450	655	201	10.2
195/75R16C	8PR	107/105	R	5 1/2J	D 925 S 975	475	698	196	10.2
205/75R16C	8PR	110/108	R	5 1/2J	D 1000 S 1060	475	714	203	10.2
215/75R16C	8PR	113/111	R	6J	D 1090 S 1150	475	728	216	10.2
225/65R16C	8PR	112/110	R	6 1/2J	D 1060 S 1120	475	698	228	10.0
225/70R15C	8PR	112/110	R	6 1/2J	D 1060 S 1120	450	697	228	10.2
225/75R16C	10PR	121/120	R	6J	D 1400 S 1450	575	744	223	10.2
235/65R16C	10PR	121/119	R	7J	D 1360 S 1450	575	712	240	10.0






LINGLONG johnny_zhang 192.168.56.90 2020-10-26 11:06:19

TBR TIRE

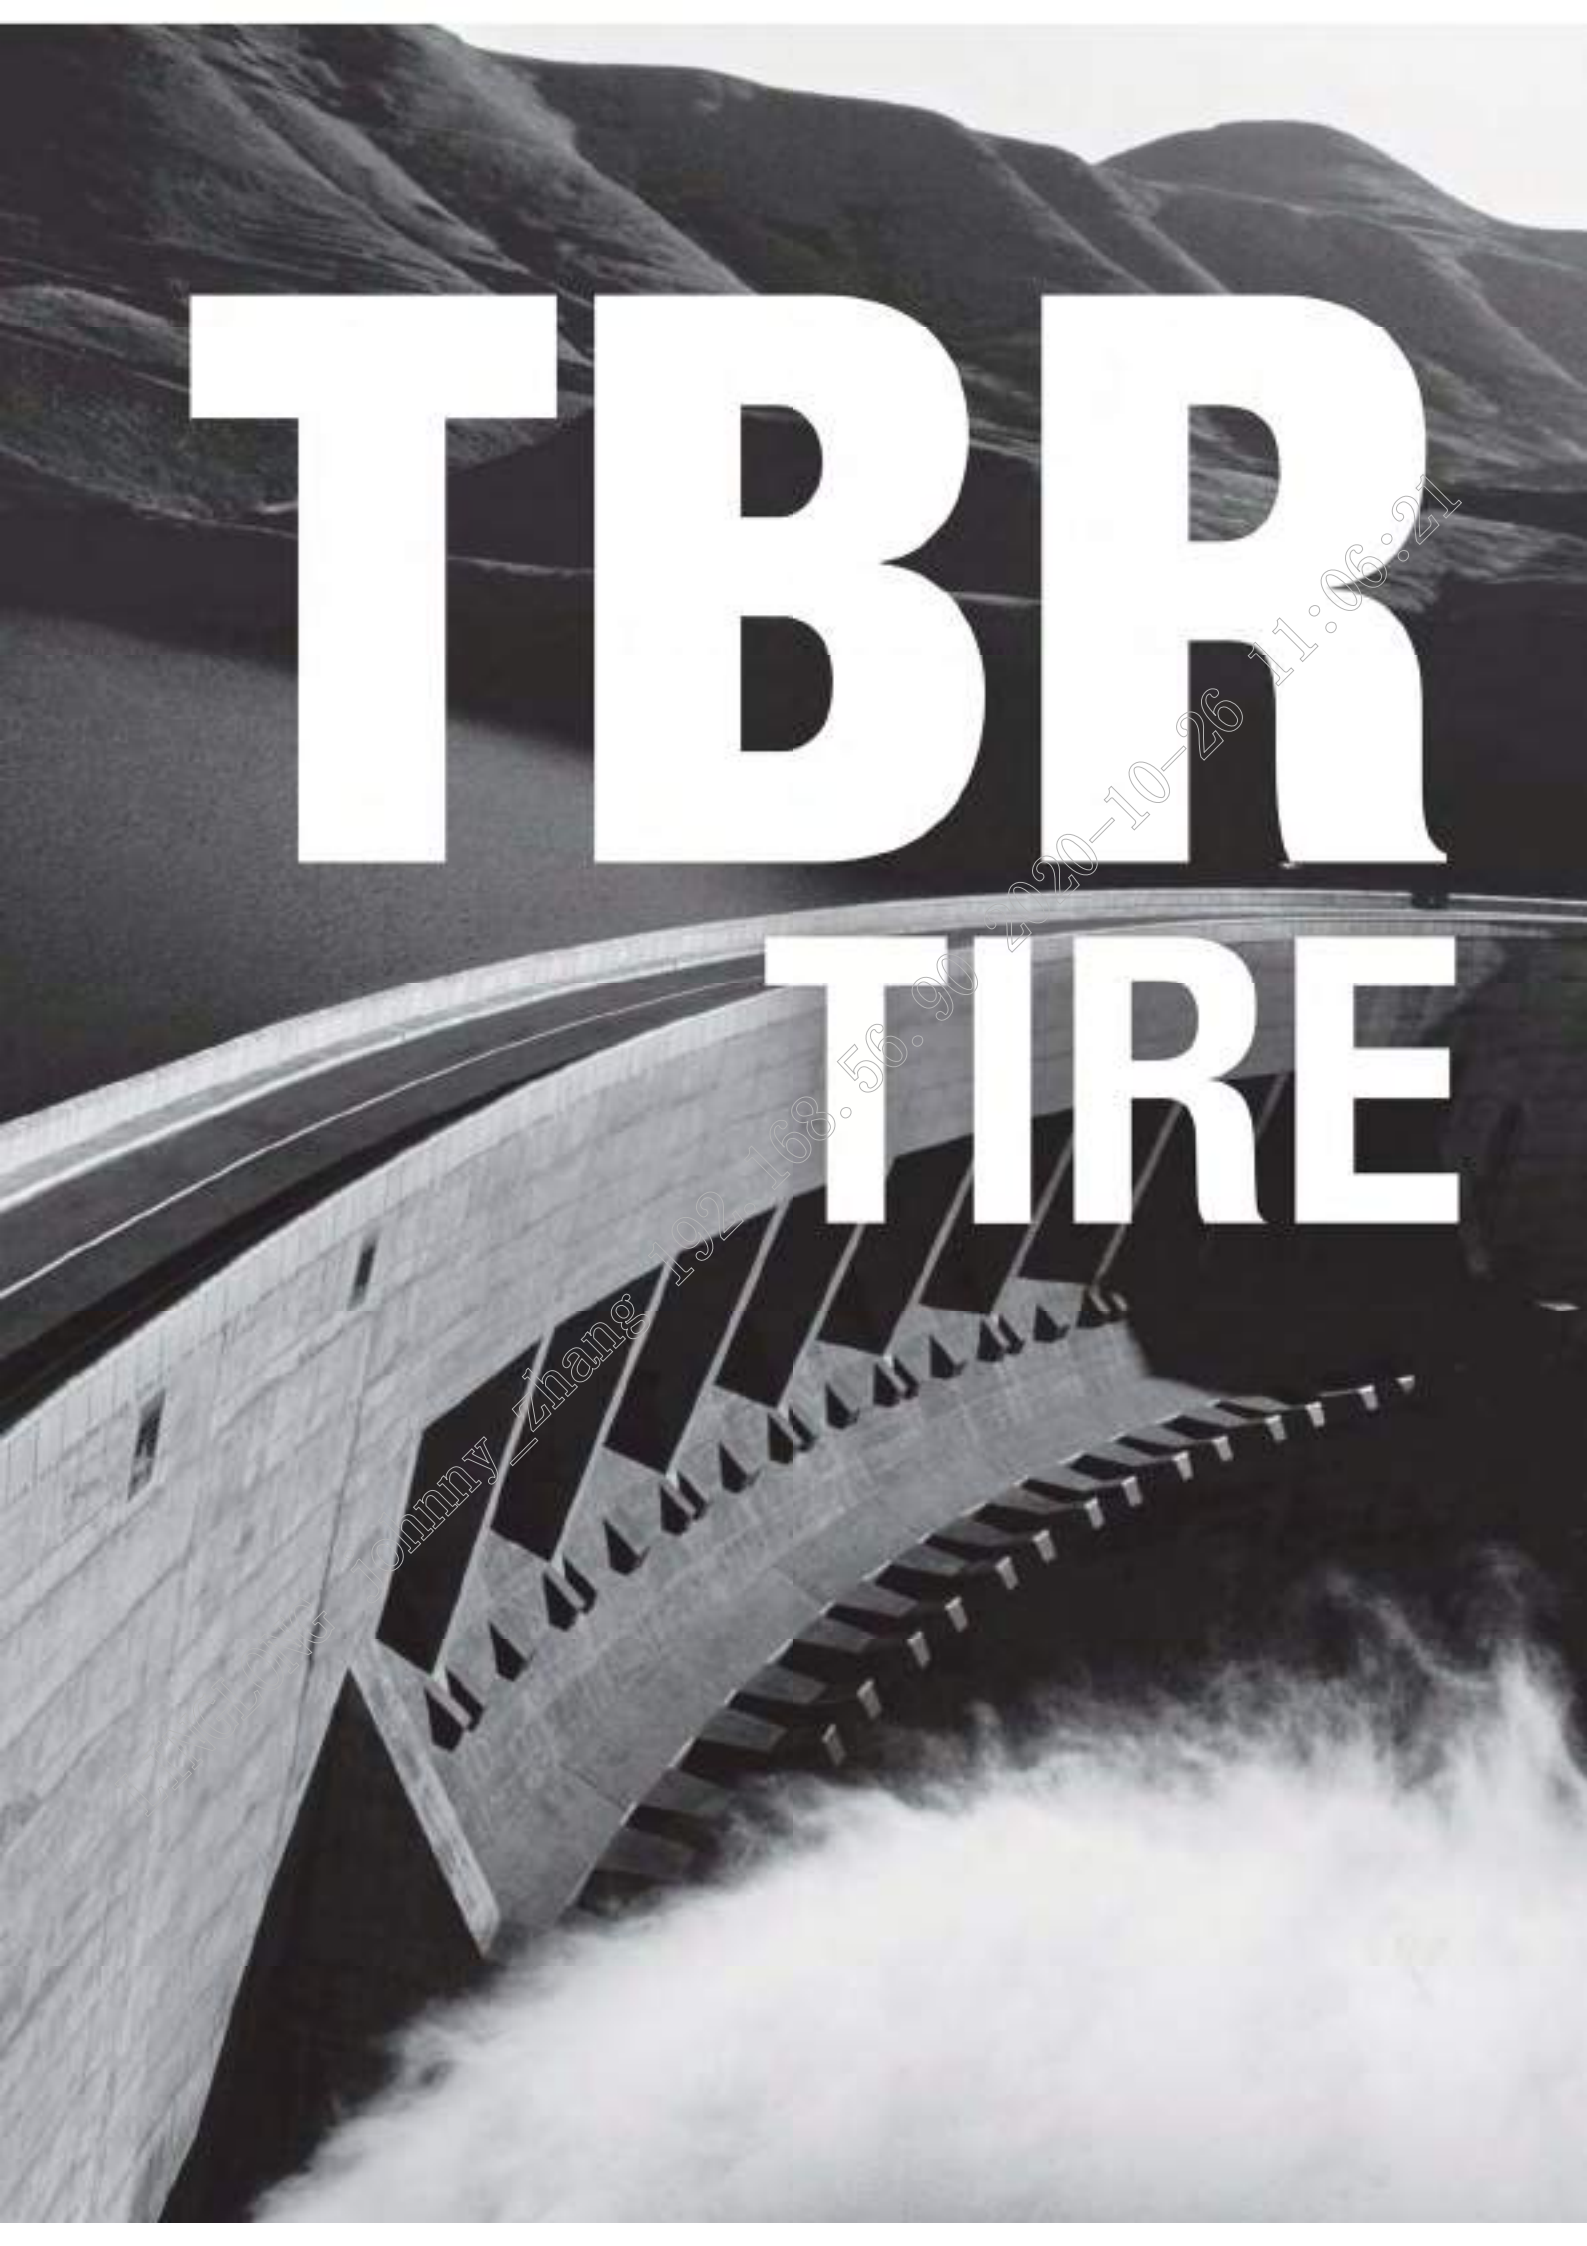

192.168.56.90 2020-10-26 11:06:21
Tommy Zhang

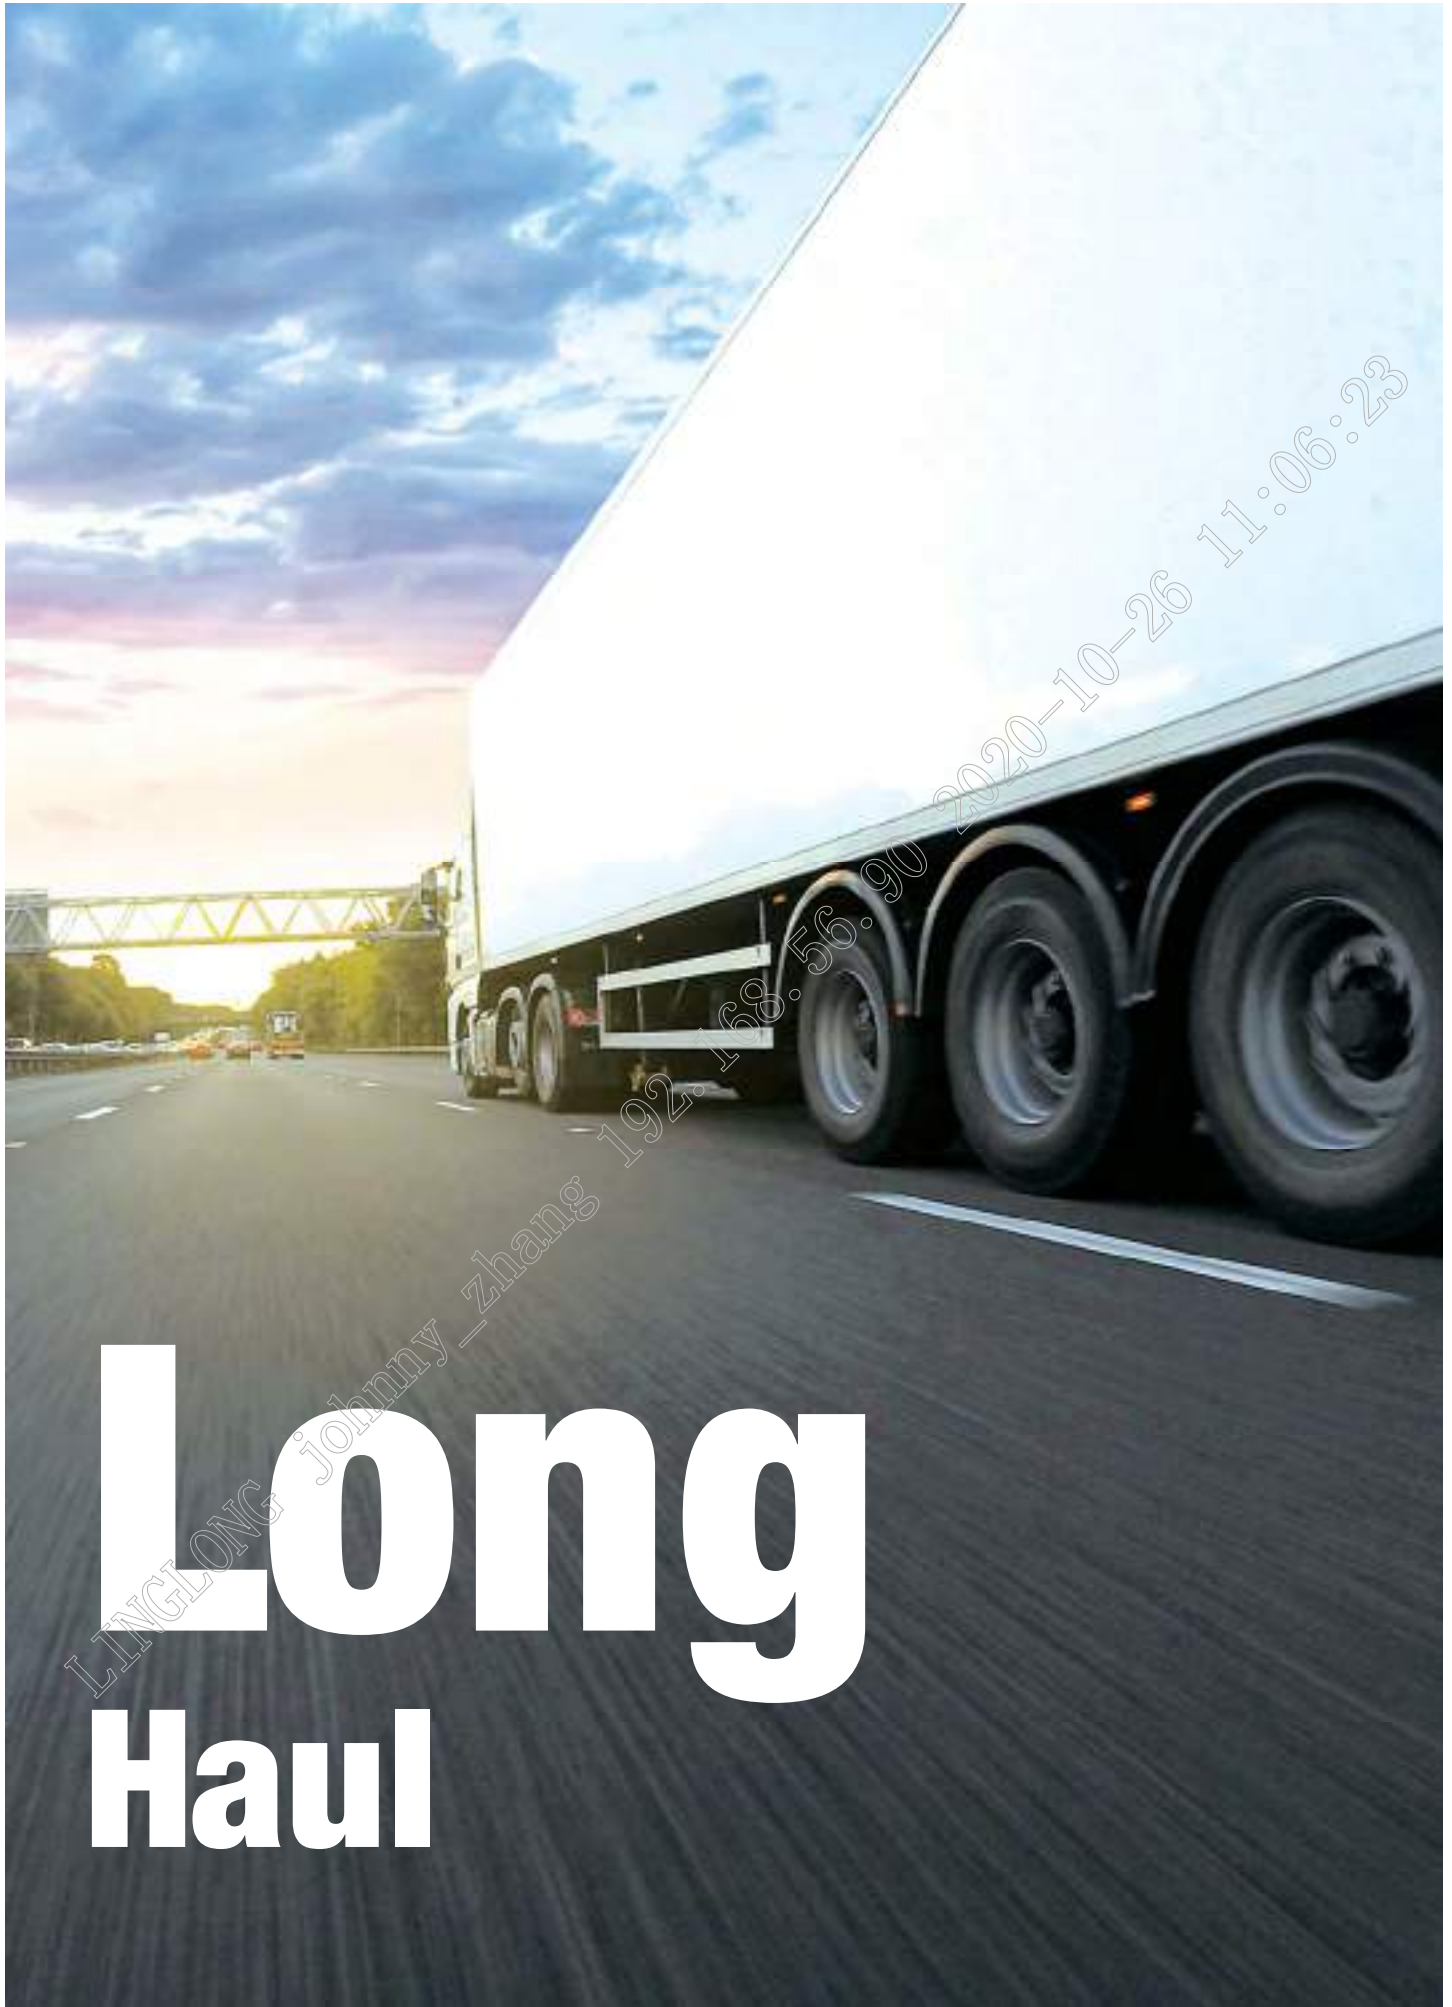

LINGLONG johnny_zhang 192.168.56.90 2020-10-26 11:06:23

Long Haul

**NEW**

ETS100

Radial Truck Tire (For International Long-Distance Transportation)

Suitable for steer axle of trucks running with high speed on highway.

- 1.Low rolling resistance reduces fuel consumption.
- 2.Lasting grip and stability by hidden groove design.
- 3.New pattern design improves mileage for long distance transportation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	15.0	ETRTO
315/80R22.5	22	158/150 (154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.0	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	15.0	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	15.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	14.5	ETRTO
315/60R22.5	18	154/150 (152/148)	L(M)	9.75	3350	900	3750	900	950	313	14.5	ETRTO
295/60R22.5	16	149/146	M	9.00	3000	900	3250	900	926	292	13.0	ETRTO


**NEW**

ETD100

Radial Truck Tire (For International Long-Distance Transportation)

Suitable for drive axle of trucks running with high speed on highway.

- 1.Low rolling resistance reduces fuel consumption.
- 2.Lasting grip and stability by hidden groove design,with M+S and 3PMSF marking.
- 3.New pattern design improves mileage for long distance transportation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	17.0	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	16.5	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	16.5	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	16.5	ETRTO
295/60R22.5	16	149/146	M	9.00	3000	900	3250	900	926	292	16.0	ETRTO



NEW

ETT100

Radial Truck Tire (For International Long-Distance Transportation)

Suitable for trailer axle of trucks running with high speed on highway.

- 1.Low rolling resistance reduces fuel consumption.
- 2.Lasting grip and stability by hidden groove design.
- 3.New pattern design improves mileage for long distance transportation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/55R19.5	18	156	J	12.25	--	--	4000	900	919	386	12.5	ETRTO
385/55R22.5	18	158	L	12.25	--	--	4250	850	996	386	12.0	ETRTO
385/55R22.5	20	160(158)	K(L)	12.25	--	--	4500	900	996	386	12.0	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	--	--	4500	900	1072	389	13.5	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	--	--	5000	900	1072	389	13.5	ETRTO
425/65R22.5	18	162	K	12.25	--	--	4750	760	1124	422	14.5	TRA
425/65R22.5	20	164	K	12.25	--	--	5000	830	1124	422	14.5	GB
425/65R22.5	20	165	K	12.25	--	--	5150	830	1124	422	14.5	TRA
425/65R22.5	20	165	K	12.25	--	--	5150	825	1124	422	14.5	ETRTO
435/50R19.5	18	156	J	14.00	--	--	4000	850	931	438	12.5	ETRTO
435/50R19.5	20	160	J	14.00	--	--	4500	900	931	438	12.5	ETRTO
445/45R19.5	18	156	J	15.00	--	--	4000	900	895	446	12.5	ETRTO
445/45R19.5	20	160	J	15.00	--	--	4500	900	895	446	12.5	ETRTO



NEW

AFE891

Radial Truck Tire (Long Haul Steer)

- 1.Maximize tread volume for long original life and lower tread wear cost per mile.
- 2.Equalizer ribs absorb irregular wear, promoting uniform rib wear and higher removal mileage.
- 3.Micro sipes protects against irregular wear.
- 4.Strong carcass materials.
- 5.Help promote tire durability and provide tire retreadability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1014	298	16.5	TRA
295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1014	298	16.5	TRA



ADE892

NEW

Radial Truck Tire

Suitable for the drive axle of trucks running on highway.

1. Good braking and grip on wet road.
2. Long life, low rolling resistance.
3. Optimize the footprint for even wear and long tread longevity.
4. Strong carcass materials.
5. Help promote tire durability and provide tire retreadability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	22.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	22.0	TRA
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1116	279	22.0	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1116	279	22.0	TRA
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1026	298	22.0	TRA
295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1026	298	22.0	TRA
285/75R24.5	14	144/141	L	8.25	2575	760	2800	760	1062	283	22.0	TRA
285/75R24.5	16	147/144	L	8.25	2800	830	3075	830	1062	283	22.0	TRA




KTD10

NEW

Radial Truck Tire

Suitable for the drive axle of the trucks running on highway.

1. Low rolling resistance reduces fuel consumption.
2. Closed shoulder to fight irregular wear.
3. New pattern design improves mileage for long distance transportation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	23.8	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	23.8	TRA
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1116	279	23.8	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1116	279	23.8	TRA
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1026	298	22.2	TRA
295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1026	298	22.2	TRA
285/75R24.5	14	144/141	L	8.25	2575	760	2800	760	1062	283	22.2	TRA
285/75R24.5	16	147/144	L	8.25	2800	830	3075	830	1062	283	22.2	TRA



LLD37e+

Radial Truck Tire

Suitable for the drive axle of the trucks running on highway.

1. Good braking and grip on wet road.
2. Long life.
3. Low fuel consumption.
4. Certified by U.S.A SmartWay.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1065	279	17.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1065	279	17.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1116	279	22.0	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1116	279	22.0	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1026	298	22.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1026	298	22.0	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1062	283	22.0	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1062	283	22.0	TRA



ADL817

Radial Truck Tire (Long Haul Drive)

1. Typical block pattern design makes good towing and grip on wet and dry road.
2. Low fuel consumption.
3. Wear-resistance compound reduces shifting to prevent uneven wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
445/50R22.5	18	158	L	14.00	--	--	4250	760	1018	445	20.0	TRA
445/50R22.5	20	161	L	14.00	--	--	4625	830	1018	445	20.0	TRA
445/50R22.5	18	155	L	14.00	--	--	3875	700	1018	445	20.0	ETRTO
445/50R22.5	20	161	L	14.00	--	--	4625	850	1018	445	20.0	ETRTO



ATL811

Radial Truck Tire

Suitable for the trailer axle of trucks running on highway.

1.Low fuel consumption.

2.Wear-resistance compound reduces shifting to prevent uneven wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
445/50R22.5	18	158	L	14.00	--	--	4250	760	1018	445	10.5	TRA
445/50R22.5	20	161	L	14.00	--	--	4625	830	1018	445	10.5	TRA
445/50R22.5	18	155	L	14.00	--	--	3875	700	1018	445	10.5	ETRTO
445/50R22.5	20	161	L	14.00	--	--	4625	850	1018	445	10.5	ETRTO



AFE805

Radial Truck Tire (Long Haul Steer)

1.S-shaped groove bottom reduces stone retention.

2.Good handling and high-speed performance.

3.Low fuel consumption.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	15.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	15.0	GB
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	15.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	15.0	ETRTO
315/80R22.5	22	158/150 (154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.0	ETRTO




ADE803

Radial Truck Tire

Suitable for the drive axle of the trucks running on highway.

- 1.Low fuel consumption.
- 2.Good braking and grip on wet road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	18.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	18.5	ETRTO



LLF02

Radial Truck Tire

Suitable for the steer axle of the trucks running on highway.

- 1.Stable and safe when run on wet and slippery road.
- 2.Low fuel consumption.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	14.5	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.5	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	14.5	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.5	ETRTO



LLF16

Radial Truck Tire

Suitable for the steer axle of the trucks running on highway.

- 1.Good handling.
- 2.Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA




LLD37

Radial Truck Tire

Suitable for the drive axle of the trucks running on highway.

- 1.Good braking and grip on wet road.
- 2.Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1065	279	22.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1065	279	22.0	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1116	279	22.0	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1116	279	22.0	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1026	298	22.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1026	298	22.0	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1062	283	22.0	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1062	283	22.0	TRA



ATE821

Radial Truck Tire (Long Haul Trailer)

- 1.Excellent straight running performance.
- 2.Sipes in shoulder offer low noise and good heat dissipation.
- 3.Low fuel consumption.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	9.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	9.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	9.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	9.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	10.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	10.0	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	9.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	9.5	TRA



LLF16e+

Radial Truck Tire (Long Haul Steer)

1. Good handling.
2. Low fuel consumption.
3. Certified by U.S.A SmartWay.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA



T820

Radial Truck Tire

Suitable for the trailer axle of the trucks running on highway.
1.Low fuel consumption.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/55R19.5	18	156	J	12.25	--	--	4000	900	919	386	12.5	ETRTO
435/50R19.5	18	156	J	14.00	--	--	4000	850	931	438	12.5	ETRTO
435/50R19.5	20	160	J	14.00	--	--	4500	900	931	438	12.5	ETRTO
445/45R19.5	18	156	J	15.00	--	--	4000	900	895	446	15.5	ETRTO
445/45R19.5	20	160	J	15.00	--	--	4500	900	895	446	15.5	ETRTO



LLD01

Radial Truck Tire

Suitable for the drive axle of the trucks running on highway.
1.Good grip and high-speed performance.
2.Low fuel consumption.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	20.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	19.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	19.5	ETRTO




T830

Radial Truck Tire

Suitable for the trailer axle of the trucks running on highway.
1.Low fuel consumption.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/55R22.5	18	158	L	12.25	--	--	4250	850	996	386	15.5	ETRTO
385/55R22.5	20	160	J	12.25	--	--	4500	900	996	386	15.5	ETRTO

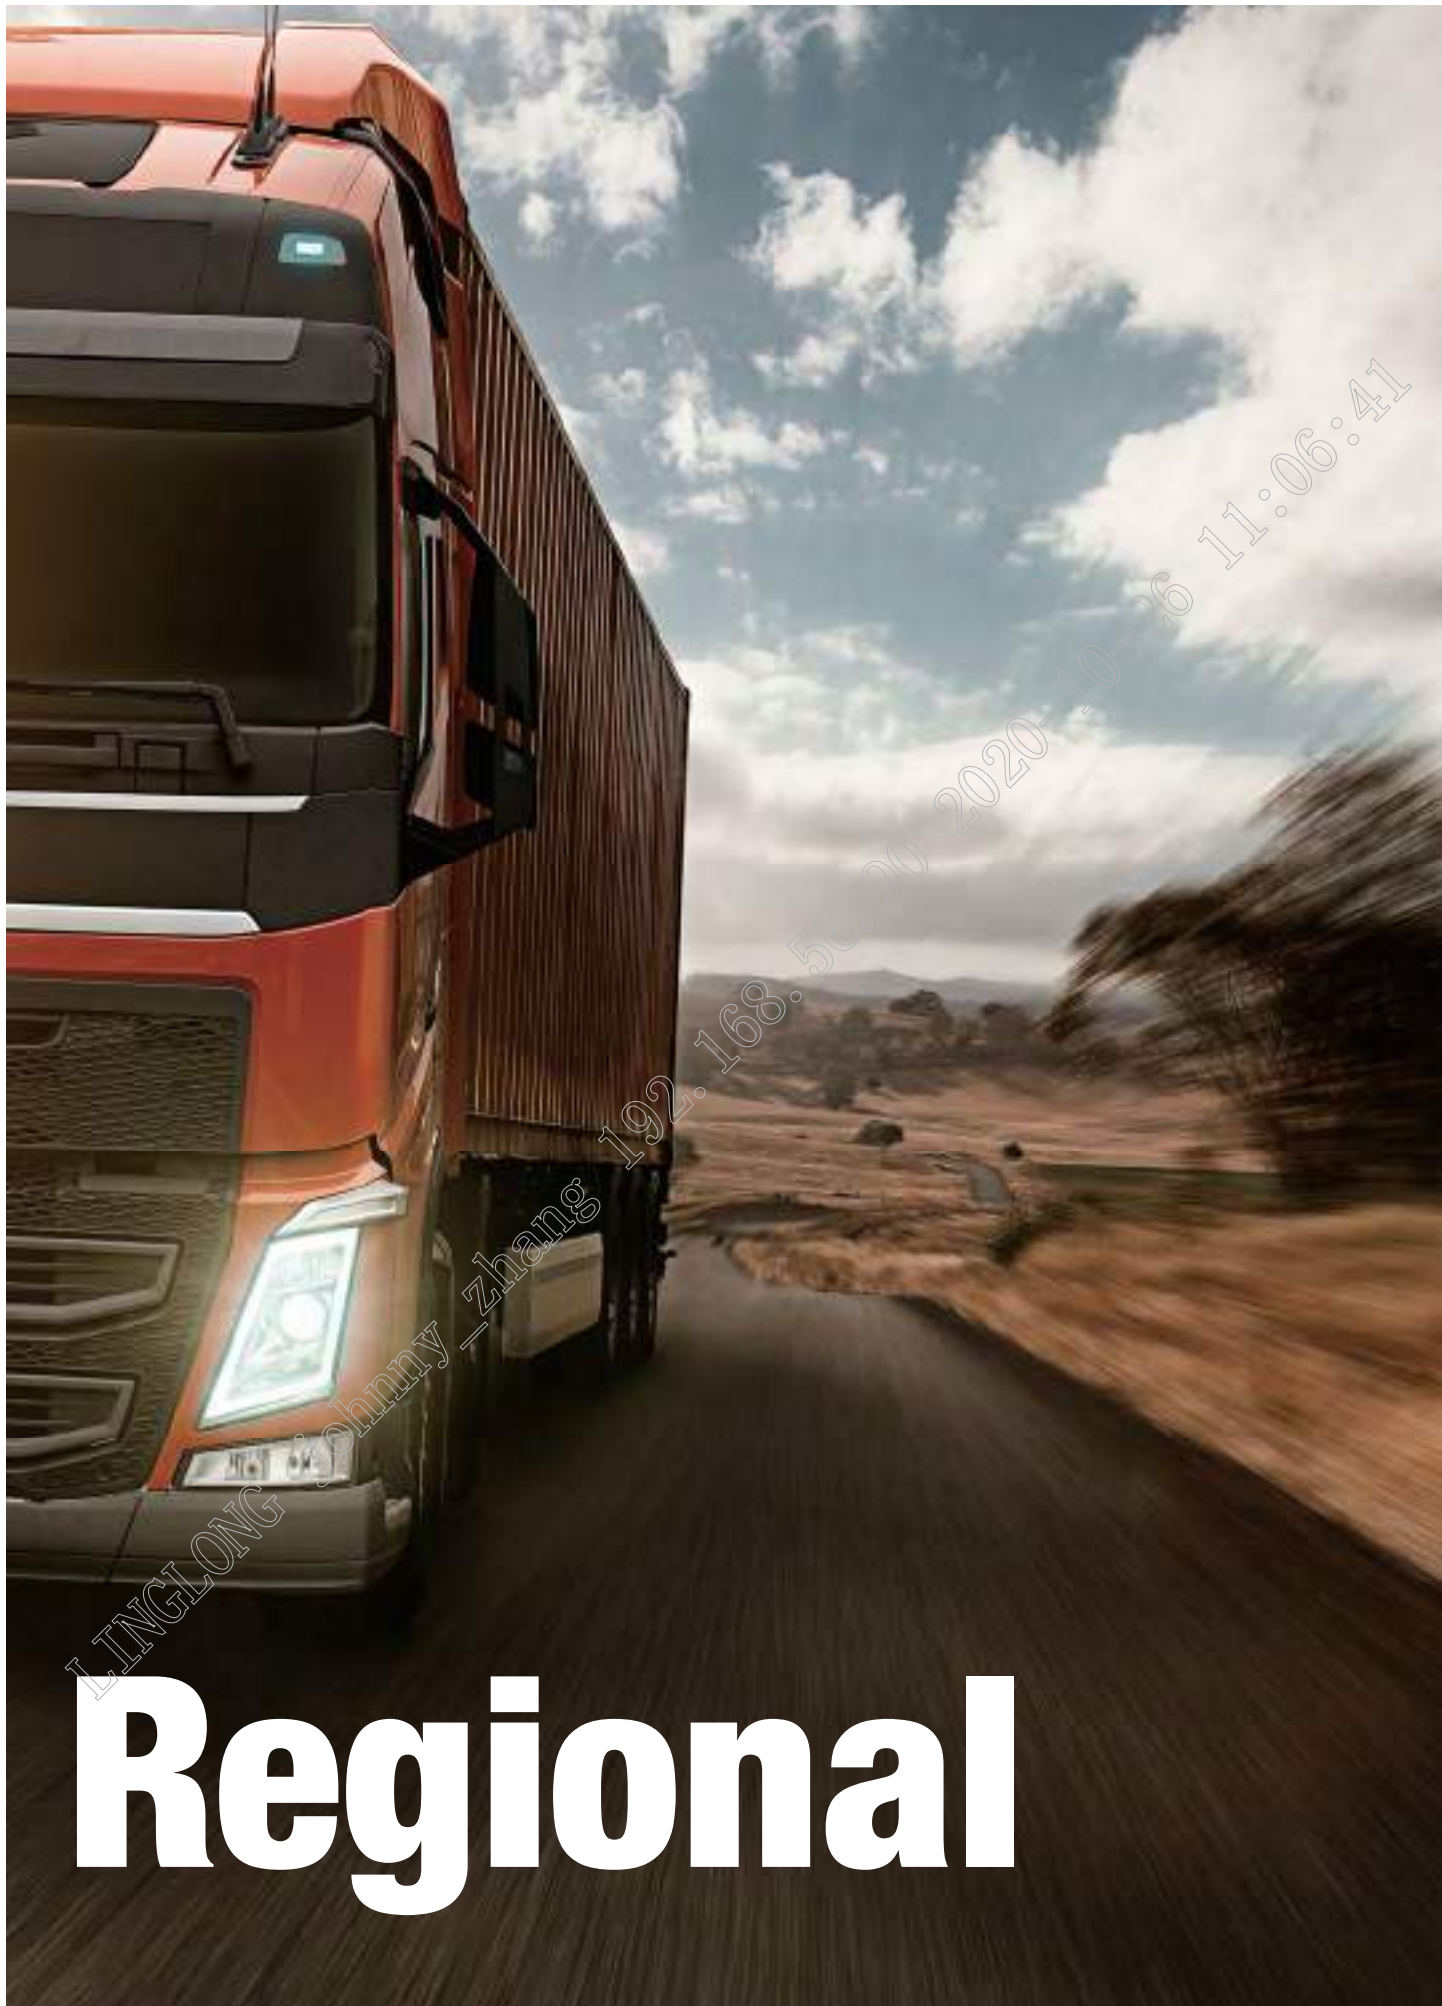

Regional



KTA303

NEW

Radial Truck Tire (For National And Regional Transportation)

Suitable for all position axle of trucks running under a wide range of use, from highway to light unpaved road.

1. Optimization of the shoulder block improves resistance to shoulder damage.
2. Lasting grip and stability, with stone rejection design.
3. HAT technology: low heat generation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	14.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	14.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	14.5	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	15.5	GB
9.5R17.5	14	129/127	M	6.75	1750	750	1850	750	842	240	11.5	ETRTO
9.5R17.5	18	143/141	M	6.75	2575	875	2725	875	842	240	11.5	ETRTO
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	14.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	14.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	14.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.0	ETRTO
215/75R17.5	14	126/124	L	6.00	1600	700	1700	700	767	211	12.0	ETRTO
215/75R17.5	16	135/133	L/J	6.00	2060	850	2180	850	767	211	12.0	ETRTO
235/75R17.5	14	132/130	L	6.75	1900	775	2000	775	797	233	12.5	ETRTO
235/75R17.5	16	141/140	L	6.75	2500	850	2575	850	797	233	12.5	ETRTO
235/75R17.5	18	143/141	L/J	6.75	2575	875	2725	875	797	233	12.5	ETRTO
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	12.5	ETRTO
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	12.5	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	12.5	ETRTO
385/65R22.5	18	158	K	11.75	--	--	4250	850	1072	389	16.0	ETRTO
385/65R22.5	20	160	K	11.75	--	--	4500	900	1072	389	16.0	ETRTO




ADL161

NEW

Radial Truck Tire

1. Typical block pattern design suitable for the drive axle of trucks.
2. Good braking and grip on the road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	20.0	GB



KTD303

NEW


Radial Truck Tire(For National And Regional Transportation)

Suitable for drive axle of trucks running under a wide range of use, from highway to light unpaved road.

1.Optimization of the shoulder block improves resistance to shoulder damage.

2.Lasting grip and stability, with M+S.

3.HAT technology: low heat generation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	17.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	17.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	17.5	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	17.5	GB
9.5R17.5	14	129/127	L	6.75	1750	750	1850	750	842	240	14.5	ETRTO
9.5R17.5	18	143/141	L	6.75	2575	875	2725	875	842	240	14.5	ETRTO
12R22.5	16	152/148	M	9.00	3150	850	3550	850	1084	300	19.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	19.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	17.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	18.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	18.0	ETRTO
215/75R17.5	14	126/124	L	6.00	1600	700	1700	700	767	211	14.0	ETRTO
215/75R17.5	16	135/133	L	6.00	2060	850	2180	850	767	211	14.0	ETRTO
235/75R17.5	14	132/130	L	6.75	1900	775	2000	775	797	233	14.5	ETRTO
235/75R17.5	16	141/140	L	6.75	2500	850	2575	850	797	233	14.5	ETRTO
235/75R17.5	18	143/141	L	6.75	2575	875	2725	875	797	233	14.5	ETRTO
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	14.5	ETRTO
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	14.5	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	14.5	ETRTO



KLS200

NEW

Radial Truck Tire (Regional Steer)

1.Long life.

2.Retreadability.

3.Low eccentric wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	13.5	ETRTO
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	13.5	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	13.5	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	13.5	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	13.5	ETRTO
305/70R19.5	16	144/141	M	9.00	2575	760	2800	760	923	305	13.5	TRA
305/70R19.5	18	146/143	M	9.00	2725	830	3000	830	923	305	13.5	TRA
305/70R19.5	18	148/145	M	9.00	2900	850	3150	850	923	305	13.5	ETRTO



KTS300

NEW

Radial Truck Tire (For National And Regional Transportation)

Suitable for the steer axle of trucks running under an wide range of use, from highway to light unpaved road.

1. Optimization of the shoulder block ,improves resistance to shoulder damage.
2. Lasting grip and stability ,with stone rejection design.
3. High wear resistance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
295/80R22.5	18	154/149	L	9.00	3250	850	3750	850	1044	298	--	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	--	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	15.5	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	15.5	ETRTO
315/80R22.5	20	157/154	L	9.00	3750	900	4125	900	1076	312	15.5	TRA
315/80R22.5	22	158/150 (154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.5	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	15.5	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	15.5	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	--	ETRTO
315/60R22.5	18	154/150 (152/148)	L(M)	9.75	3350	900	3750	900	950	313	--	ETRTO
385/55R22.5	18	158	L	12.25	--	--	4250	850	996	386	13.5	ETRTO
385/55R22.5	20	160(158)	K(L)	12.25	--	--	4500	900	996	386	13.5	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	--	--	4500	900	1072	389	15.5	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	--	--	5000	900	1072	389	15.5	ETRTO




KLD200

NEW

Radial Truck Tire

1. Typical block pattern design suitable for the drive axle of trucks.
2. Good braking and grip on the road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	15.5	ETRTO
265/70R19.5	16	140/138	M	7.50	2360	775	2500	775	867	262	15.5	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
305/70R19.5	16	144/141	M	9.00	2575	760	2800	760	923	305	16.0	TRA
305/70R19.5	18	146/143	M	9.00	2725	830	3000	830	923	305	16.0	TRA
305/70R19.5	18	148/145	M	9.00	2900	850	3150	850	923	305	16.0	ETRTO


**NEW**

KTD101

Radial Truck Tire (For National And Regional Transportation)

Suitable for the drive axle of trucks running on highway, national road and general road.

1. Optimization of the shoulder block improves resistance to shoulder damage.
2. Lasting grip and stability, with M+S marking.
3. High wear resistance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	22.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	22.0	GB


**NEW**

KTD200

Radial Truck Tire (For National And Regional Transportation)

Suitable for the drive axle of trucks running on highway, national road, general road.

1. Optimization of the shoulder block improves resistance to shoulder damage.
2. Lasting grip and stability, with M+S and 3PMSF marking.
3. High wear resistance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	22.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	22.0	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	19.5	ETRTO


**NEW**

KTD300

Radial Truck Tire (For National And Regional Transportation)

Suitable for the drive axle of trucks running under an wide range of use, from highway to light unpaved road.

1. Optimization of the shoulder block improves resistance to shoulder damage.
2. Lasting grip and stability, with M+S and 3PMSF marking.
3. High wear resistance.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	22.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	22.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	20.5	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	22.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	22.0	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	19.5	ETRTO

**NEW**

KTD301

Radial Truck Tire

1. Typical block pattern design suitable for the drive axle of trucks.
2. Good braking and grip on the road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	22.5	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	22.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	22.5	ETTRO
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1104	279	22.5	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	22.5	TRA



KTA20

NEW

Radial Truck Tire

Suitable for all position of trucks using for high traction and high scrub applications.

1. Wide, strong shoulder ribs increase tread life.
2. Lasting grip and stability.
3. High wear resistance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	15.1	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	15.1	TRA
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1104	279	15.1	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	15.1	TRA
295/75R22.5	14	144/141	L	9.00	2575	760	2800	760	1014	298	15.1	TRA
295/75R22.5	16	146/143	L	9.00	2725	830	3000	830	1014	298	15.1	TRA
285/75R24.5	14	144/141	L	8.25	2575	760	2800	760	1050	283	15.1	TRA
285/75R24.5	16	147/144	L	8.25	2800	830	3075	830	1050	283	15.1	TRA



AFL185

NEW

Radial Truck Tire (Regional Steer)

1. Optimization of the shoulder and the proportion of pattern block in the middle.
2. Four straight groove matching S type variable Angle groove design and ensure good steering tyre and self-cleaning properties.
3. Ultra strong skeleton materials applications and Promote tire safety performance.
4. High wear resistance of new formula application and Wear mileage increases more than 20%.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	16.5	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	17.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	17.0	ETRTO



AFL177

NEW

Radial Truck Tire (Regional Steer)

- 1.Optimization of the shoulder and the proportion of pattern block in the middle.
- 2.Four straight groove matching S type variable Angle groove design and ensure good steering tyre and self-cleaning properties.
- 3.Ultra strong skeleton materials applications and Promote tire safety performance.
- 4.High wear resistance of new formula application and Wear mileage increases more than 20%.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.5	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1050	279	16.5	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	17.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	17.0	ETRTO




ADL186

NEW

Radial Truck Tire (Regional Drive)

- 1.Optimization of the shoulder and the proportion of pattern block in the middle.
- 2.Classic mahjong block pattern style matching variable Angle groove design and ensure a strong drive and self-cleaning.
- 3.Ultra strong skeleton materials applications and Promote tire safety performance.
- 4.High wear resistance of new formula application and Wear mileage increases more than 20%.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	22.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	22.0	GB
295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	23.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	23.0	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	23.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	23.0	ETRTO



ATL863

Radial Truck Tire (Regional Trailer)

- 1. Typical combined pattern design offers optimal trailer performance.
- 2. Low rolling resistance.
- 3. Wear-resistance compound reduces shifting to prevent uneven wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/65R22.5	18	158	K	11.75	--	--	4250	850	1072	389	16.5	ETRTO
385/65R22.5	20	160(158)	J(L)	11.75	--	--	4500	900	1072	389	16.5	ETRTO
385/65R22.5	24	164	J	11.75	--	--	5000	900	1072	389	16.5	ETRTO
425/65R22.5	18	162	K	12.25	--	--	4750	760	1124	422	17.5	TRA
425/65R22.5	20	165	J/K	12.25	--	--	5150	825	1124	422	17.5	ETRTO
445/65R22.5	20	168	J/K	13.00	--	--	5600	830	1150	444	18.0	TRA
445/65R22.5	20	169	J/K	13.00	--	--	5800	900	1150	444	18.0	ETRTO
385/55R22.5	18	158	K	12.25	--	--	4250	850	996	386	16.5	ETRTO
385/55R22.5	20	160(158)	J(L)	12.25	--	--	4500	900	996	386	16.5	ETRTO



LLF01

Radial Truck Tire

- 1. Special design for steer and trailer axle of trucks.
- 2. Good side-wear resistance.
- 3. High-speed performance.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
275/80R22.5	16	149/146	M	8.25	3000	850	3250	850	1012	276	14.5	ETRTO
315/60R22.5	16	152/148	M	9.75	3150	900	3550	900	950	313	14.5	ETRTO
315/60R22.5	18	154/150 (152/148)	L(M)	9.75	3350	900	3750	900	950	313	14.5	ETRTO
295/60R22.5	16	149/146	M	9.00	3000	900	3250	900	926	292	14.5	ETRTO



AAL836

Radial Truck Tire (Regional All position)

1. Good handling and driving.
2. Long life.
3. Retreadability.
4. Low eccentric wear.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.0	TRA
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	18.5	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	18.5	GB
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.5	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1050	279	16.5	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	18.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	18.0	GB
13R22.5	18	156/150	L	9.75	3350	875	4000	875	1124	320	18.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	16.0	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	18.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	18.0	ETRTO



ADL831

Radial Truck Tire (Regional Drive)

1. Typical block pattern design make good grip performance.
2. High wear resistance and long life.
3. Retreadability.
4. Low eccentric wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	21.0	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	21.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	21.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	21.5	TRA
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	21.5	GB
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1065	279	22.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	22.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	22.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	23.0	ETRTO
12R22.5	18	152/149	M	9.00	3250	930	3550	930	1085	300	23.0	GB
295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	23.0	ETRTO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	23.0	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	23.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	23.0	ETRTO
285/70R19.5	16	140/137	M	8.25	2300	725	2500	725	895	283	19.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	19.0	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	19.0	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	23.0	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	23.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	23.0	ETRTO



ATL812

Radial Truck Tire (Regional Steer)

- 1.Long life.
- 2.Retreadability.
- 3.Low eccentric wear.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	15.0	TRA
10R22.5	14	141/139	L	7.50	2430	790	2575	790	1019	254	17.0	TRA
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.0	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1050	279	16.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	17.0	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	17.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	M	9.00	3350	850	4000	850	1076	312	17.0	ETRTO
315/80R22.5	22	158/150 (154/150)	L(M)	9.00	3350	900	4250	900	1076	312	17.0	ETRTO
285/70R19.5	16	140/137	M	8.25	2300	725	2500	725	895	283	16.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	16.0	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	16.0	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	17.0	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	17.0	ETRTO
315/60R22.5	16	152/148	L	9.75	3150	900	3550	900	950	313	17.0	ETRTO
315/60R22.5	18	154/150 (152/148)	L(M)	9.75	3350	900	3750	900	950	313	17.0	ETRTO



ADL813

Radial Truck Tire (Regional Drive)

1. Long life.
2. Good grip performance.
3. Retreadability.
4. Low eccentric wear.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1059	279	20.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1059	279	20.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	20.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	21.0	ETRTO
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	21.0	GB
13R22.5	18	156/150	L	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	21.0	ETRTO



LLF02

Radial truck tire

1. Special design for steer and trailer axle of trucks.
2. Good side-wear resistance.
3. High-speed performance.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	14.5	ETRTO
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	16.5	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.5	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	14.5	GB
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	14.5	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.5	ETRTO
315/80R22.5	22	158/150 (154/150)	L(M)	9.00	3350	900	4250	900	1076	312	14.5	ETRTO



LLF06

Radial Truck Tire

- 1.Special design for all position of buses and steer or trailer axle of trucks.
- 2.Good side-wear resistance.
- 3.High-speed performance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
9.00R20	14	141/139	L	7.0	2430	790	2575	790	1019	259	14.0	TRA
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	14.0	GB
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	14.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	15.5	TRA
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1050	279	14.5	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	14.5	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	14.5	ETRTO
315/80R22.5	22	158/150 (154/150)	L(M)	9.00	3350	900	4250	900	1076	312	14.5	ETRTO



F805

Radial Truck Tire

- 1.Special design for steer and trailer axle of trucks.
- 2.Good side-wear resistance.
- 3.High-speed performance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	14.5	ETRTO
305/70R22.5	14	150/148	L	9.00	3150	850	3350	850	1000	305	14.5	ETRTO
305/70R22.5	16	152/148	L	9.00	3150	900	3550	900	1000	305	14.5	ETRTO
315/70R22.5	14	152/148	M	9.00	3150	850	3550	850	1014	312	14.5	ETRTO
315/70R22.5	16	154/150	M	9.00	3350	900	3750	900	1014	312	14.5	ETRTO



F816

Radial Truck Tire

- 1.Special design for steer and trailer axle of trucks.
- 2.Good side-wear resistance.
- 3.High-speed performance.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	14.5	GB
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	15.5	TRA
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	L	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	L	8.5	3450	830	3750	830	1125	315	15.5	TRA
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1050	279	14.5	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	16.0	ETRTO
12R22.5	16	150/147	M	9.00	3075	830	3350	830	1085	300	16.0	GB
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	16.0	GB
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA



F860+

Radial Truck Tire

- 1.Special design for all position of buses and steer and trailer axle of trucks.
- 2.Good side-wear resistance.
- 3.High-speed performance.
- 4.New technology for tire to reduce the weight.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
275/80R22.5	16	149/146	M	8.25	3000	850	3250	850	1012	276	14.0	ETTRO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	15.0	ETRTO



F860

Radial Truck Tire

- 1.Special design for all position of buses and steer or trailer axle of trucks.
- 2.Good side-wear resistance.
- 3.High-speed performance.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	14.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	L	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	L	8.5	3450	830	3750	830	1125	315	15.5	TRA
11.00R22	16	152/149	K	8.0	3250	830	3550	830	1135	293	14.5	TRA
11.00R22	18	154/151	K	8.0	3450	930	3750	930	1135	293	14.5	GB
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	16.5	ETRTO
315/80R22.5	22	158/150 (154/150)	L(M)	9.00	3350	900	4250	900	1076	312	16.5	ETRTO
305/75R24.5	14	152/148	L	9.00	3150	800	3550	800	1080	305	14.5	ETRTO
305/75R24.5	16	154/149	L	9.00	3250	850	3750	850	1080	305	14.5	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3150	850	3550	850	1014	312	15.5	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	3750	900	1014	312	15.5	ETRTO



D915

Radial Truck Tire

- 1.Typical block pattern design suitable for the drive axle of trucks.
- 2.Good braking and grip on the road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
295/60R22.5	16	149/146	M	9.00	3000	900	3250	900	926	292	17.5	ETRTO
315/60R22.5	16	152/148	M	9.75	3150	900	3550	900	950	313	19.5	ETRTO



D905

Radial Truck Tire

- 1. Typical block pattern design suitable for the drive axle of trucks.
- 2. Good braking and grip on the road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	20.0	ETRTO
275/80R22.5	16	149/146	M	8.25	3000	850	3250	850	1012	276	17	ETTRO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.5	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.5	GB
285/70R19.5	16	140/137	M	8.25	2300	725	2500	725	895	283	16.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	16.0	ETRTO
285/70R19.5	18	150/148	J	8.25	3150	900	3350	900	895	283	16.0	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	17.5	ETRTO
315/70R22.5	14	152/148	M	9.00	3150	850	3550	850	1014	312	17.5	ETRTO
315/70R22.5	16	154/150	M	9.00	3350	900	3750	900	1014	312	17.5	ETRTO



D920

Radial Truck Tire

- 1. Typical block pattern design suitable for the drive axle of trucks.
- 2. Good braking and grip on the road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	19.5	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	19.5	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3150	850	3550	850	1014	312	19.5	ETRTO



D928

Radial Truck Tire

1. Typical block pattern design suitable for the drive axle of trucks.
2. Good braking and grip on the road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	17.5	GB
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	20.0	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	20.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	19.5	GB
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1059	279	20.5	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1059	279	20.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	20.5	ETRTO
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1110	279	20.5	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1110	279	20.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1020	298	20.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1020	298	20.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1056	283	20.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1056	283	20.5	TRA



D930

Radial Truck Tire

1. Typical block pattern design suitable for the drive axle of trucks.
2. Good braking and grip on the road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11.00R22	16	152/149	K	8.00	3250	830	3550	830	1135	293	19.5	TRA
305/75R24.5	14	152/148	L	9.00	3150	800	3550	800	1080	305	19.5	ETRTO
305/75R24.5	16	154/149	L	9.00	3250	850	3750	850	1080	305	19.5	ETRTO



D935

Radial Truck Tire

- 1. Typical block pattern design suitable for the drive axle of trucks.
- 2. Good braking and grip on the road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	18.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	18.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.5	GB



T810

Radial Truck Tire

Suitable for the trailer axle of the trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	10.75	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	10.75	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	10.75	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	10.75	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	10.75	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	10.75	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	10.75	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	10.75	TRA
255/70R22.5	16	140/137	M	7.50	2300	830	2500	830	930	255	10.75	TRA



LLD37

Radial Truck Tire

Suitable for the trailer axle of the trucks running on the multi road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	16.0	ETRTO



LLA18

Radial Truck Tire

Suitable for the trailer axle of the trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/65R22.5	18	158	K	11.75	--	--	4250	850	1072	389	16.5	ETRTO
385/65R22.5	20	160	J	11.75	--	--	4500	900	1072	389	16.5	ETRTO



A928

Radial Truck Tire

Suitable for the trailer axle of the trucks running on the high-grade road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/55R22.5	20	160(158)	J(L)	12.25	--	--	4500	900	996	386	16.5	ETRTO
385/65R22.5	20	160(158)	J(L)	11.75	--	--	4500	900	1072	389	16.5	ETRTO



LLA28

Radial Truck Tire

Suitable for the trailer axle of the trucks running on the multi road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
425/65R22.5	18	162	K	12.25	--	--	4750	760	1124	422	17.5	TRA
425/65R22.5	20	165	J/K	12.25	--	--	5150	825	1124	422	17.5	ETRTO



F820

Radial Truck Tire (Regional All Position)

Suitable for all position axle of buses and medium trucks.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
265/70R19.5	14	136/134	M	7.50	2120	725	2240	725	867	262	13.5	ETRTO
265/70R19.5	16	140/138	L	7.50	2360	775	2500	775	867	262	13.5	ETRTO
265/70R19.5	18	143/141	J	7.50	2575	850	2725	850	867	262	13.5	ETRTO
285/70R19.5	16	144/142	M	8.25	2650	800	2800	800	895	283	14.0	ETRTO
285/70R19.5	18	146/144	M	8.25	2800	900	3000	900	895	283	14.0	ETRTO
285/70R19.5	18	150/147	J	8.25	3075	900	3350	900	895	283	14.0	ETRTO
255/70R22.5	14	136/133	M	7.50	2060	700	2240	700	930	255	14.0	ETRTO
255/70R22.5	16	140/137	M	7.50	2300	830	2500	830	930	255	14.0	TRA
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	14.5	ETRTO
275/70R22.5	18	150/148	M	8.25	3150	900	3350	900	958	276	14.5	ETRTO



T820

Radial Truck Tire

Suitable for all position axle of trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
305/70R19.5	18	148/145	M	9.00	2900	850	3150	850	923	305	12.0	ETRTO



LLF26

Radial Truck Tire

Suitable for all position axle of medium trucks.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.50R20	12	128/126	L	6.0	1700	760	1800	760	935	215	11.5	GB
7.50R20	14	130/128	K	6.0	1800	830	1900	830	935	215	11.5	GB
8.25R20	12	133/131	L	6.5	1950	720	2060	720	974	236	12.5	GB
8.25R20	14	136/134	L	6.5	2120	830	2240	830	974	236	12.5	GB
8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	12.5	GB



LLF76

Radial Truck Tire

Suitable for all position axle of buses and medium trucks.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
8R22.5	12	128/126	M	6.00	1700	760	1800	760	935	203	13.0	GB
8R22.5	14	130/128	M	6.00	1800	830	1900	830	935	203	13.0	GB



LLF56+

Radial Truck Tire

Suitable for all position axle of buses and trucks.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
9R22.5	12	133/131	M	6.75	1950	720	2060	720	974	229	13.5	TRA
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	13.5	TRA
10R22.5	14	141/139	M	7.50	2430	790	2575	790	1019	254	14.0	TRA
10R22.5	14	144/142	L	7.50	2650	850	2800	850	1019	254	14.0	ETRTO
10R22.5	16	144/142	L	7.50	2650	900	2800	900	1019	254	14.0	GB



C600

Radial Truck Tire

Suitable for all position axle of trucks running on the high-grade road.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	15.0	TRA
10R22.5	14	144/142	L	7.50	2650	850	2800	850	1020	254	15.0	ETRTO
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	16.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	16.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO



AAL800

Radial Truck Tire

Suitable for all position axle of trucks running on the multi road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
8.25R20	12	133/131	L	6.5	1950	720	2060	720	974	236	12.0	GB
8.25R20	14	136/134	L	6.5	2120	830	2240	830	974	236	12.0	GB
8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	12.0	GB
11.00R20	16	150/147	L	8.0	3075	830	3350	830	1085	293	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	17.0	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	17.0	ETRTO
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	16.0	ETRTO
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	16.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	16.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	16.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	16.0	ETRTO



AFL827

Radial Truck Tire (Regional Steer)

- 1.New technology for tire to reduce the weight.
- 2.Low eccentric wear.
- 3.Low fuel consumption.
- 4.Good handling.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
12R22.5	18	152/149	L	9.00	3250	930	3550	930	1085	300	13.0	GB
12R22.5	16	152/148	L	9.00	3150	850	3550	850	1084	300	13.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	14.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	14.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	13.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	13.0	ETRTO
385/65R22.5	18	158	K	11.75	--	--	4250	850	1072	389	13.0	ETRTO
385/65R22.5	20	160	J	11.75	--	--	4500	900	1072	389	13.0	ETRTO



F816e+

Radial Truck Tire (Regional All Position)

1. Good handling.
2. Low fuel consumption.
3. Certified by U.S.A SmartWay.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	14.5	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	14.5	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	14.5	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	14.5	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	14.5	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	14.5	TRA
285/75R24.5	14	144/141	M	8.25	2575	760	2800	760	1050	283	14.5	TRA
285/75R24.5	16	147/144	M	8.25	2800	830	3075	830	1050	283	14.5	TRA



D900

Radial Truck Tire (Regional Drive)

- 1.New technology for tire to reduce the weight.
- 2.Low eccentric wear.
- 3.Low fuel consumption.
- 4.Good braking and grip on the road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
10.00R20	16	146/143	L	7.5	2725	830	3000	830	1054	278	17.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	17.5	GB



LLF02e+

Radial Truck Tire (Regional All Position)

1. Good handling.
2. Low fuel consumption.
3. Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
315/80R22.5	18	154/151	M	9.00	3450	830	3750	830	1076	312	14.5	TRA
315/80R22.5	20	157/154	L	9.00	3750	900	4125	900	1076	312	14.5	TRA



LAL800e+

Radial Truck Tire (Regional All Position)

1. Good handling.
2. Low fuel consumption.
3. Certified by U.S.A SmartWay.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	16.0	TRA



T810e+

Radial Truck Tire (Regional Trailer)

- 1.Low fuel consumption.
- 2.Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	10.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	10.0	TRA
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	10.75	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	10.75	TRA
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1014	298	10.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1014	298	10.0	TRA



LLA18e+

Radial Truck Tire (Regional Trailer)

- 1.Low fuel consumption.
- 2.Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/65R22.5	18	158	K	11.75	--	--	4250	830	1072	389	16.5	TRA

On&Off Road



LINGLONG journey zhang 192.168.56.90 2020-10-26 11:07:19



KMA400

NEW

Radial Truck Tire (On&Off Road)

Suitable for all position axle of trucks under all kinds of working conditions.

- 1.Thick sidewall design protects against sidewall impacts and bruises.
- 2.Stone rejection design protects groove bottom from stone puncture.
- 3.Lasting grip and stability,with M+S and 3PMSF marking.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
8.25R20	14	136/134	K	6.5	2120	830	2240	830	974	236	15.5	GB
8.25R20	16	139/137	K	6.5	2300	930	2430	930	974	236	15.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	16.0	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	19.0	ETRTO
13R22.5	20	158/156	K	9.75	4000	900	4250	900	1124	320	19.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	19.0	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	19.0	GB
295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	19.0	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	19.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	19.0	ETRTO
315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	19.0	ETRTO



KMD406

NEW

Radial Truck Tire (On&Off Road)

Suitable for drive axle of trucks under all kinds of working conditions.

- 1.Thick sidewall design protects against sidewall impacts and bruises.
- 2.Stone rejection design protects groove bottom from stone puncture.
- 3.Lasting grip and stability,with M+S and 3PMSF marking.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	21.0	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	21.0	GB
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	21.0	ETRTO



KMD402

Radial Truck Tire (On&Off Road)

Suitable for drive axle of trucks under all kinds of working conditions.

- 1.Thick sidewall design protects against sidewall impacts and bruises.
- 2.Stone rejection design protects groove bottom from stone puncture.
- 3.Lasting grip and stability.

NEW



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	20.0	GB
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	22.5	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	22.5	ETRTO



KXA400

Radial Truck Tire (On&Off Road)

Suitable for trailer and steer axle of trucks under all kinds of working conditions.

- 1.Thick sidewall design protects against sidewall impacts and bruises.
- 2.Stone rejection design protects groove bottom from stone puncture.
- 3.Lasting grip and stability,with M+S and 3PMSF marking.

NEW



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/65R22.5	18	158	L	11.75	--	--	4250	850	1072	389	18.0	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	--	--	4500	900	1072	389	18.0	ETRTO
385/65R22.5	24	164	J	11.75	--	--	5000	900	1072	389	18.0	ETRTO
425/65R22.5	20	165	K	12.25	--	--	5150	825	1124	422	18.5	ETRTO



KMA40

Radial Truck Tire (On&Off Road)

Suitable for all position axle of trucks under all kinds of working conditions.

1. Chip, cut and abrasion resistance tread compound.
2. Stone rejection design protects groove bottom from stone puncture.
3. Deep tread depth increases mileage and service life.

NEW



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	18.3	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	18.3	TRA



KMD401

Radial Truck Tire (On&Off Road)

Suitable for drive axle of trucks under all kinds of working conditions.

1. Chip, cut and abrasion resistance tread compound.
2. Stone rejection design protects groove bottom from stone puncture.
3. Deep tread depth increases mileage and service life.

NEW



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1054	279	20.5	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	20.5	ETTRO
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1104	279	22.5	TRA
295/80R22.5	16	152/148	L	9.00	3150	850	3550	850	1044	298	20.5	ETTRO
295/80R22.5	18	152/149	L	9.00	3250	900	3550	900	1044	298	20.5	GB



KMA403

NEW

Radial Truck Tire (On&Off Road)

Suitable for all position axle of trucks under all kinds of working conditions.
1.Thick sidewall design protects against sidewall impacts and bruises.
2.Stone rejection design protects groove bottom from stone puncture.
3.HAT technology: low heat generation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	14.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	14.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	14.5	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	14.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	15.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	15.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	15.5	GB
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	15.5	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	15.5	ETRTO
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	15.5	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	15.5	GB
13R22.5	18	154/151	K	9.75	3450	830	3750	830	1124	320	15.5	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	15.5	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	15.0	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	15.0	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	15.5	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	15.5	ETRTO





KMD403

NEW

Radial Truck Tire (On&Off Road)

Suitable for drive axle of trucks under all kinds of working conditions.

- 1.Thick sidewall design protects against sidewall impacts and bruises.
- 2.Stone rejection design protects groove bottom from stone puncture.
- 3.HAT technology: Low heat generation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	19.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	19.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	20.0	GB
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	19.0	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	19.0	ETRTO
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	19.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	19.0	GB
13R22.5	18	154/151	K	9.75	3450	830	3750	830	1124	320	19.0	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	19.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	18.5	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	18.5	GB
315/80R22.5	18	154/150	L	9.00	3350	825	3750	825	1076	312	19.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	19.0	ETRTO



AAR919

Radial Truck Tire (On&Off Road All Position)

1. pattern block design reduces shoulder heat.
2. Wide running surface and higher saturation design improves the wear mileage.
3. Powerful traction, grip and climbing performance.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.50R20	12	128/126	L	6.0	1700	760	1800	760	935	215	14.5	GB
7.50R20	14	130/128	K	6.0	1800	830	1900	830	935	215	14.5	GB
8.25R20	14	136/134	K	6.5	2120	830	2240	830	974	236	15.5	GB
8.25R20	16	139/137	K	6.5	2300	930	2430	930	974	236	15.5	GB
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	16.0	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	16.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	16.0	GB
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	19.0	TRA
11R22.5	16	148/145	K	8.25	2900	850	3150	850	1050	279	19.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	18.0	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	18.0	GB
295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	18.0	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	20.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	20.0	ETRTO
315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	20.0	ETRTO
325/95R24	22	162/160	K	9.00	4500	850	4750	850	1228	325	18.0	ETRTO
12R24.5	16	152/149	K	9.00	3250	830	3550	830	1135	300	16.0	TRA
12R24.5	18	154/151	K	9.00	3450	930	3750	930	1135	300	16.0	GB



AAR959

Radial Truck Tire (On&Off Road All Position)

1. Wide and deep tread grooves for long tire life.
2. Excellent cutting and chipping resistance.
3. Robust tread and high traction on rough surfaces.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
8.25R20	16	139/137	F	6.5	2300	930	2430	930	974	236	18.0	GB
9.00R20	16	144/142	D	7.0	2650	900	2800	900	1019	259	20.0	GB
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	18.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	18.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	19.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	19.0	GB
325/95R24	22	162/160	K	9.00	4500	850	4750	850	1228	325	23.0	ETRTO



ADR978

Radial Truck Tire (On&Off Road Drive)

1. Good traction.
2. Chip, cut and abrasion resistance tread compound.
3. Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	16.0	GB
12.00R20	20	156/153	K	8.5	3650	900	4000	900	1125	315	16.0	GB
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	20.5	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	20.5	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	21.0	ETRTO



D960

Radial Truck Tire (On&Off Road Drive)

- 1.Deep and rigid block design for long life and good traction.
- 2.Cut resistance compound.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	21.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	21.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	21.0	TRA
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	21.0	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	21.0	ETRTO
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	21.0	ETRTO
12R22.5	18	152/149	K	9.00	3250	930	3550	930	1085	300	21.0	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
9.5R17.5	14	129/127	K	6.75	1750	750	1850	750	842	240	16.0	ETRTO
9.5R17.5	18	143/141	K	6.75	2575	875	2725	875	842	240	16.0	ETRTO
265/70R19.5	16	140/138	K	7.50	2360	775	2500	775	867	262	15.5	ETRTO
265/70R19.5	18	143/141	K	7.50	2575	850	2725	850	867	262	15.5	ETRTO
275/70R22.5	16	148/145	K	8.25	2900	900	3150	900	958	276	21.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	22.0	ETRTO
295/80R22.5	18	152/149	K	9.00	3250	900	3550	900	1044	298	22.0	GB
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	21.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	21.0	ETRTO



A918

Radial Truck Tire (On&Off Road All Position)

- 1.Typical combined pattern.
- 2.Cut resistance compound.
- 3.Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	17.5	ETRTO



LLA01

Radial Truck Tire (On&Off Road all position)

1. Typical combined pattern.
2. Cut resistance compound.
3. Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	15.5	TRA
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	15.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	17.0	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	17.0	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.5	GB
13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	17.5	ETRTO
13R22.5	20	158/156	K	9.75	4000	900	4250	900	1124	320	17.5	ETRTO



LLA58

Radial Truck Tire (On&Off Road All Position)

1. Typical combined pattern.
2. Cut resistance compound.
3. Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	14.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	14.5	GB
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	15.5	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	15.5	ETRTO



A908

Radial Truck Tire (On&Off Road All Position)

1. Typical combined pattern.
2. Cut resistance compound.
3. Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
13R22.5	18	156/150 (154/150)	G(K)	9.75	3350	875	4000	875	1124	320	17.5	ETRTO



LLD09

Radial Truck Tire (On&Off Road Drive)

1. Rigid block design for good traction.
2. Cut resistance compound.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
8.25R20	12	133/131	L	6.5	1950	720	2060	720	974	236	14.5	GB
8.25R20	14	136/134	L	6.5	2120	830	2240	830	974	236	14.5	GB
8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	14.5	GB
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	15.5	TRA
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	15.5	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	16.0	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	16.0	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	17.0	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	17.0	GB



LLA08

Radial Truck Tire (On&Off Road All Position)

1. Typical combined pattern.
2. Cut resistance compound.
3. Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.50R20	12	128/126	L	6.0	1700	760	1800	760	935	215	13.5	GB
7.50R20	14	130/128	K	6.0	1800	830	1900	830	935	215	13.5	GB
8.25R20	12	133/131	L	6.5	1950	720	2060	720	974	236	15.5	GB
8.25R20	14	136/134	L	6.5	2120	830	2240	830	974	236	15.5	GB
8.25R20	16	139/137	L	6.5	2300	930	2430	930	974	236	15.5	GB
9.00R20	14	141/139	K	7.0	2430	790	2575	790	1019	259	15.0	TRA
9.00R20	16	144/142	K	7.0	2650	900	2800	900	1019	259	15.0	GB
10.00R20	16	146/143	K	7.5	2725	830	3000	830	1054	278	15.5	TRA
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	15.5	GB
11.00R20	16	150/147	K	8.0	3075	830	3350	830	1085	293	16.5	GB
11.00R20	18	152/149	K	8.0	3250	930	3550	930	1085	293	16.5	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	17.0	TRA
12.00R24	18	156/153	K	8.5	3650	775	4000	775	1226	313	17.0	ETRTO
12.00R24	20	160/156	K	8.5	4000	850	4500	850	1226	313	17.0	ETRTO
11R22.5	14	144/142	K	8.25	2650	720	2800	720	1054	279	15.5	TRA
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	15.5	TRA
11R22.5	16	148/145	K	8.25	2900	850	3150	850	1050	279	15.5	ETRTO
12R22.5	16	152/148	K	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
11R24.5	14	146/143	K	8.25	2725	720	3000	720	1104	279	15.5	TRA
11R24.5	16	149/146	K	8.25	3000	830	3250	830	1104	279	15.5	TRA
12R24.5	16	152/149	K	9.00	3250	830	3550	830	1135	300	16.0	TRA
12R24.5	18	154/151	K	9.00	3450	930	3750	930	1135	300	16.0	GB
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	18	154/149	K	9.00	3250	850	3750	850	1044	298	16.0	ETRTO
315/80R22.5	18	154/150	M	9.00	3350	825	3750	825	1076	312	17.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	17.0	ETRTO
315/80R22.5	22	158/150	K	9.00	3350	900	4250	900	1076	312	17.0	ETRTO



LLA68

Radial Truck Tire (On&Off Road All Position)

1. Typical combined pattern.
2. Cut resistance compound.
3. Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
10.00R20	18	149/146	K	7.5	3000	930	3250	930	1054	278	15.5	GB



D980

Radial Truck Tire (On&Off Road Drive)

1. Deep and rigid block design for long life and good traction.
2. Cut resistance compound.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
13R22.5	18	156/150 (154/150)	G(K)	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
315/80R22.5	20	156/150	L	9.00	3350	850	4000	850	1076	312	19.5	ETRTO



LLA38

Radial Truck Tire (On&Off Road Trailer)

1. Typical combined pattern.
2. Cut resistance compound.
3. Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/55R22.5	18	158	L	12.25	--	--	4250	850	996	386	16.5	ETRTO
385/55R22.5	20	160	J	12.25	--	--	4500	900	996	386	16.5	ETRTO
385/65R22.5	18	158	K	11.75	--	--	4250	850	1072	389	16.5	ETRTO
385/65R22.5	20	160	J	11.75	--	--	4500	900	1072	389	16.5	ETRTO
425/65R22.5	18	162	K	12.25	--	--	4750	760	1124	422	17.5	TRA
425/65R22.5	20	165	J/K	12.25	--	--	5150	825	1124	422	17.5	ETRTO
445/65R22.5	20	168	J/K	13.00	--	--	5600	830	1150	444	18.0	TRA
445/65R22.5	20	169	J	13.00	--	--	5800	900	1150	444	18.0	ETRTO



A938

Radial Truck Tire (On&Off Road Trailer)

1. Typical combined pattern.
2. Cut resistance compound.
3. Good braking and grip.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
385/65R22.5	20	160(158)	J(L)	11.75	--	--	4500	900	1072	389	16.5	ETRTO



A968/LTR968*

Radial Truck Tire (On&Off Road Trailer)

- 1.Cut resistance compound.
- 2.Good braking and grip.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
10.00R15TR	12	133/131	M	7.50	1950	620	2060	620	927	278	17.5	TRA
10.00R15TR	14	137/135	L	7.50	2180	720	2300	720	927	278	17.5	TRA
10.00R15TR	16	141/139	K	7.50	2430	830	2575	830	927	278	17.5	TRA
11R17.5	12	133/131	M	8.25	1950	620	2060	620	927	279	17.5	TRA
11R17.5	14	137/135	L	8.25	2180	720	2300	720	927	279	17.5	TRA
11R17.5	16	141/139	K	8.25	2430	830	2575	830	927	279	17.5	TRA
11R22.5	14	144/142	L	8.25	2650	720	2800	720	1054	279	17.5	TRA
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	17.5	TRA
11R22.5	16	148/145	K	8.25	2900	850	3150	850	1050	279	17.5	ETRTO
11R24.5	14	146/143	L	8.25	2725	720	3000	720	1104	279	17.5	TRA
11R24.5	16	149/146	K	8.25	3000	830	3250	830	1104	279	17.5	TRA
275/70R22.5*	16	148/145	K	8.25	2900	900	3150	900	958	276	17.0	ETRTO



LLA08e+

Radial Truck Tire (On&Off Road All Position)

1. Typical combined pattern.
2. Cut resistance compound.
3. Good braking and grip.
4. Certified by U.S.A SmartWay.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1054	279	15.5	TRA

Off Road



LINGLONG johnny_zhang 192.168.56.90 2020-10-26 11:07:37




ADO986

Radial Truck Tire(Off Road Drive)

Suitable for hilly area and mine etc., off road conditions

1. Off-road pattern block ensures powerful traction and good self-cleaning ability.
2. Chip, cut and abrasion resistance tread compound.
3. Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	24.5	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1136	315	24.5	GB
11R22.5	14	144/142	F	8.25	2650	720	2800	720	1065	279	24.0	TRA
11R22.5	16	146/143	F	8.25	2725	830	3000	830	1065	279	24.0	TRA
11R22.5	16	148/145	F	8.25	2900	850	3150	850	1050	279	24.0	ETRTO
12R22.5	16	152/148	F	9.00	3150	850	3550	850	1084	300	24.0	ETRTO
12R22.5	18	152/149	F	9.00	3250	930	3550	930	1096	300	24.0	GB
13R22.5	18	156/150	F	9.75	3350	875	4000	875	1124	320	24.0	ETRTO
11R24.5	14	146/143	F	8.25	2725	720	3000	720	1116	279	24.0	TRA
11R24.5	16	149/146	F	8.25	3000	830	3250	830	1116	279	24.0	TRA
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	24.5	ETRTO
295/80R22.5	18	152/149	F	9.00	3250	900	3550	900	1050	298	24.5	GB
315/80R22.5	18	154/150	F	9.00	3350	825	3750	825	1076	312	24.0	ETRTO
315/80R22.5	20	156/150	F	9.00	3350	850	4000	850	1076	312	24.0	ETRTO



ADO913

Radial Truck Tire(Off Road Drive)

1. Good traction resistance.
2. Chip, cut and abrasion resistance tread compound.
3. Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
10.00R20	18	149/146	F	7.5	3000	930	3250	930	1065	278	20.0	GB
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1054	279	20.0	ETRTO
275/80R22.5	16	149/146	J	8.25	3000	850	3250	850	1012	276	20.0	ETRTO
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	20.0	ETRTO



ADO993

Radial Truck Tire(Off Road All Position)

Suitable for mine, off road conditions

1. Off-road pattern block ensures powerful traction and good self-cleaning ability.
2. Chip, cut and abrasion resistance tread compound.
3. Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1030	259	24.5	GB
10.00R20	18	149/146	F	7.5	3000	930	3250	930	1065	278	24.5	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	24.5	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	24.5	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1136	315	24.5	GB



ADO983

Radial Truck Tire(Off Road Drive)

Suitable for hilly area and mine etc., off road conditions

1. Off-road pattern block ensures powerful traction and good self-cleaning ability.
2. Chip, cut and abrasion resistance tread compound.
3. Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1030	259	23.5	GB
10.00R20	18	149/146	F	7.5	3000	930	3250	930	1065	278	24.0	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	24.0	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	24.0	GB
12.00R20	20	156/153	F	8.5	3650	900	4000	900	1136	315	24.0	GB
12.00R24	18	156/153	F	8.5	3650	775	4000	775	1226	313	24.0	ETRTO
12.00R24	20	160/156	F	8.5	4000	850	4500	850	1226	313	24.0	ETRTO
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	22.0	ETRTO
295/80R22.5	18	152/149	F	9.00	3250	900	3550	900	1050	298	22.0	GB



LLD10

Radial Truck Tire(Off Road Drive)

- 1.Good traction resistance.
- 2.Chip,cut and abrasion resistance tread compound.
- 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
9.00R20	14	141/139	F	7.0	2430	790	2575	790	1019	259	20.0	TRA
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1019	259	20.0	GB
10.00R20	16	146/143	J	7.5	2725	830	3000	830	1054	278	20.0	TRA
10.00R20	18	149/146	J	7.5	3000	930	3250	930	1054	278	20.0	GB
11.00R20	16	150/147	F	8.0	3075	830	3350	830	1085	293	20.0	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1085	293	20.0	GB
12.00R20	18	154/151	K	8.5	3450	830	3750	830	1125	315	21.0	TRA
13R22.5	18	156/150	F	9.75	3350	875	4000	875	1124	320	20.0	ETRTO



ADM991

Radial Truck Tire (Off Road All Position)

Suitable for off road conditions.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
14.00R20	18	160/157	F	10.00W	4125	700	4500	700	1238	370	19.5	ETRTO
14.00R20	20	164/160	F	10.00W	4500	750	5000	750	1238	370	19.5	ETRTO
385/65R22.5	20	164	E	11.75	--	--	4500	900	1072	389	13.0	ETRTO
445/45R19.5	20	164	E	15.00	--	--	4500	900	895	446	13.0	ETRTO



D950

Radial Truck Tire (Short Haul)

1. Drive axle for on/off road conditions.
2. Deep and rigid block design for good traction.
3. Cut resistance compound.
4. Used for logging conditions where high traction required.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	14	144/142	K	8.25	2650	720	2800	720	1065	279	23.0	TRA
11R22.5	16	146/143	K	8.25	2725	830	3000	830	1065	279	23.0	TRA
11R24.5	14	146/143	F/G	8.25	2725	720	3000	720	1116	279	25.0	TRA
11R24.5	16	149/146	F/G	8.25	3000	830	3250	830	1116	279	25.0	TRA
295/75R22.5	16	146/143	J	9.00	2725	830	3000	830	1026	298	23.0	TRA
285/75R24.5	16	147/144	J	8.25	2800	830	3075	830	1062	283	23.0	TRA



D969

Radial Truck Tire (Off Road All Position)

1. Good traction resistance.
2. Chip, cut and abrasion resistance tread compound.
3. Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
8.25R20	12	133/131	F	6.5	1950	720	2060	720	986	236	21.5	GB
8.25R20	14	136/134	F	6.5	2120	830	2240	830	986	236	21.5	GB
8.25R20	16	139/137	F	6.5	2300	930	2430	930	986	236	21.5	GB
9.00R20	16	144/142	F	7.0	2650	900	2800	900	1030	259	23.5	GB
10.00R20	18	149/146	J	7.5	3000	930	3250	930	1065	278	25.5	GB
11.00R20	18	152/149	F	8.0	3250	930	3550	930	1096	293	25.5	GB
12.00R20	18	154/151	F	8.5	3450	830	3750	830	1136	315	25.5	TRA
12R22.5	18	152/149	J	9.00	3250	930	3550	930	1096	300	25.5	GB
295/80R22.5	16	152/148	F	9.00	3150	850	3550	850	1044	298	20.0	ETRTO



D990

Radial Truck Tire (Off Road All Position)
Suitable for off road conditions.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
14.00R20	18	160/157	F	10.00W	4125	700	4500	700	1238	370	19.5	ETRTO
14.00R20	20	164/160	F	10.00W	4500	750	5000	750	1238	370	19.5	ETRTO



Light Truck

LINGLONG johnny_zhang 192.168.56.90 2020-10-26 11:07:47

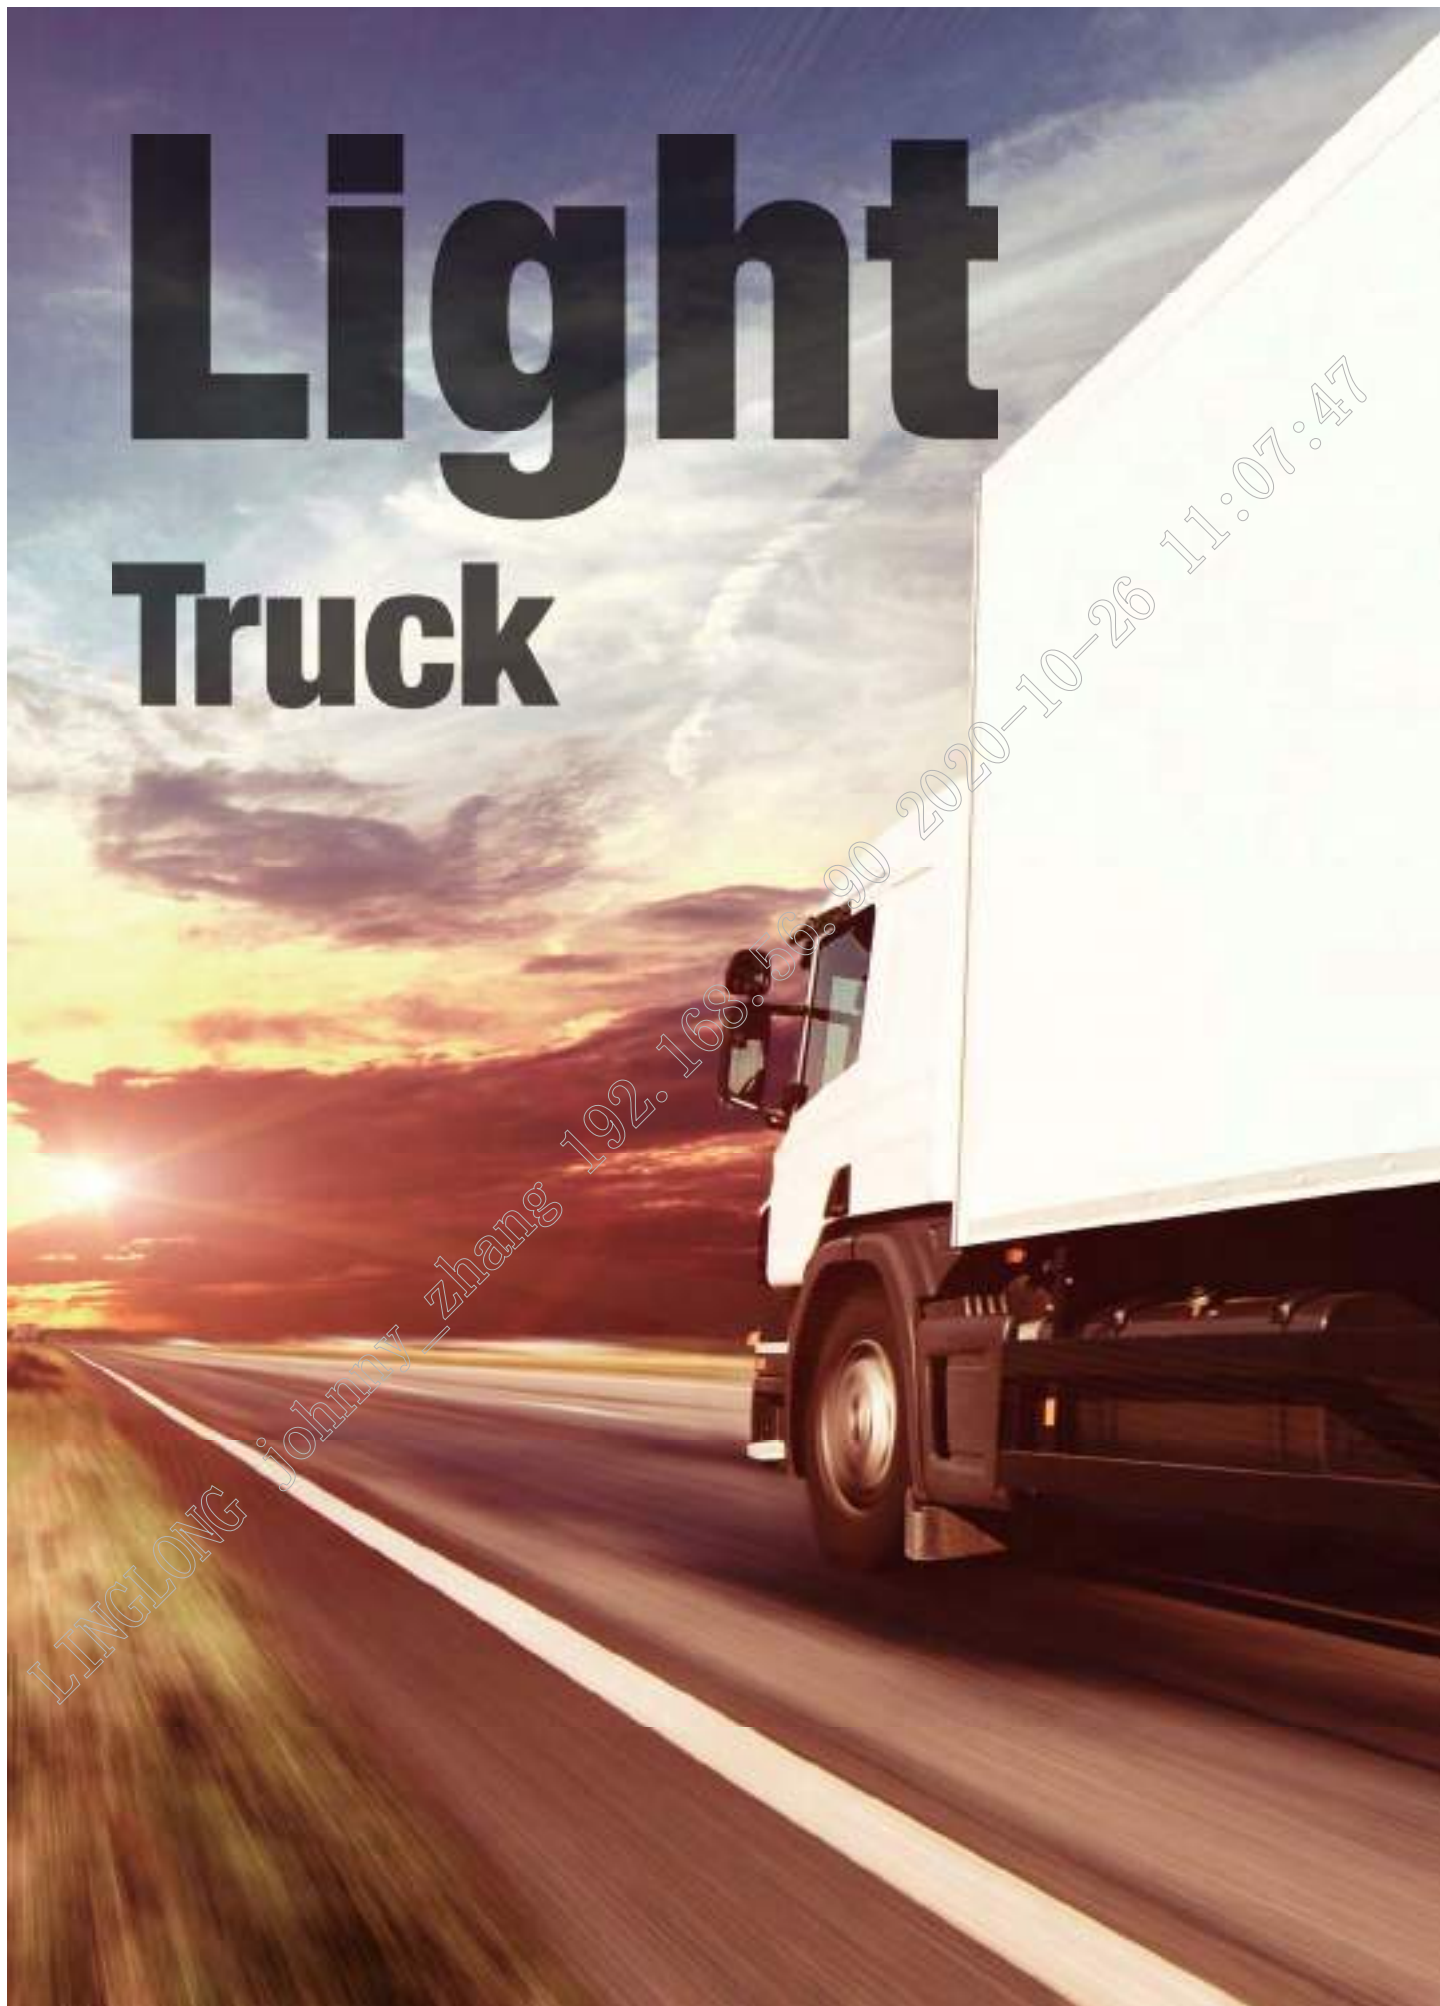



NEW

KCA651

Radial Truck Tire (Regional)

Suitable for all position axle of light trucks.

- 1.Thick sidewall design protects against sidewall impacts and bruises.
- 2.Zig-zag grooves for excellent handling.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	10.0	GB
7.00R16LT	14	118/114	M	5.50F	1180	770	1320	770	775	200	10.0	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	11.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	11.0	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	11.5	GB
8.25R16LT	14	126/122	M	6.50H	1500	670	1700	670	855	235	11.5	GB
8.25R16LT	16	128/124	M	6.50H	1600	770	1800	770	855	235	11.5	GB



NEW

KMA652

Radial Truck Tire (On&Off Road)

Suitable for all position axle of light trucks.

- 1.Thick sidewall design protects against sidewall impacts and bruises.
- 2.Stone rejection design protects groove bottom from stone puncture.
- 3.HAT technology: low heat generation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.00R16LT	12	115/110	K	5.50F	1060	670	1215	670	775	200	10.0	GB
7.00R16LT	14	118/114	K	5.50F	1180	770	1320	770	775	200	10.0	GB
7.50R16LT	12	120/116	K	6.00G	1250	670	1400	670	805	215	11.0	GB
7.50R16LT	14	122/118	K	6.00G	1320	770	1500	770	805	215	11.0	GB
8.25R16LT	12	123/119	K	6.50H	1360	560	1550	560	855	235	11.5	GB
8.25R16LT	14	126/122	K	6.50H	1500	670	1700	670	855	235	11.5	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	855	235	11.5	GB



NEW

KMA653

Radial Truck Tire (On&Off Road)

Suitable for all position axle of trucks.

- 1.Thick sidewall design protects against sidewall impacts and bruises.
- 2.Stone rejection design protects groove bottom from stone puncture.
- 3.HAT technology: low heat generation.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.00R16LT	12	115/110	K	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	K	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	12	120/116	K	6.00G	1250	670	1400	670	805	215	12.5	GB
7.50R16LT	14	122/118	K	6.00G	1320	770	1500	770	805	215	12.5	GB
8.25R16LT	12	123/119	K	6.50H	1360	560	1550	560	855	235	13.0	GB
8.25R16LT	14	126/122	K	6.50H	1500	670	1700	670	855	235	13.0	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	855	235	13.0	GB



NEW

KLS200

Radial Truck Tire (Regional All Position)

Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	12.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	12.5	ETRTO
225/75R17.5	12	126/125	M	6.75	1650	675	1700	675	783	226	12.5	ETRTO
225/75R17.5	14	129/127	M	6.75	1750	725	1850	725	783	226	12.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	12.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	12.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	12.5	ETRTO
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	12.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	12.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	12.5	ETRTO
245/70R19.5	12	129/127	M	7.50	1750	660	1850	660	839	248	12.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	12.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	12.5	ETRTO
245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	12.5	ETRTO



NEW

KLT200

Radial truck tire (Regional trailer)

Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
215/75R17.5	14	125/122	L	6.00	1500	760	1650	760	767	211	12.5	GB
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	12.5	ETRTO
215/75R17.5	16	127/124	J	6.00	1600	830	1750	830	767	211	12.5	GB
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	12.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	12.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	12.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	12.5	ETRTO
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	12.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	12.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	12.5	ETRTO



NEW

KLD200

Radial Truck Tire (Regional Drive)

Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	14.0	ETRTO
225/75R17.5	12	126/125	M	6.75	1650	675	1700	675	783	226	14.5	ETRTO
225/75R17.5	14	129/127	M	6.75	1750	725	1850	725	783	226	14.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	14.5	ETRTO
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	14.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	14.5	ETRTO
245/70R19.5	12	129/127	M	7.50	1750	660	1850	660	839	248	14.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	14.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	14.5	ETRTO
245/70R19.5	16	136/134	M	7.50	2120	825	2240	825	839	248	14.5	ETRTO



KTD23

NEW

Radial Truck Tire(Regional Drive)

Suitable for drive axle of trucks using for high traction and high scrub applications.

- 1.Horizontal pattern provides tyre excellent drive and braking performance.
- 2.Shoulder pattern groove and open pattern design with good tire heat dissipation.
- 3.Pattern block stiffener, effectively restrains grinding block root tear and decorative pattern.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
215/75R17.5	16	135/133	L	6.00	2060	850	2180	850	767	211	15.0	ETRTO
225/70R19.5	12	125/123	L	6.75	1550	660	1650	660	811	226	15.8	TRA
225/70R19.5	14	128/126	L	6.75	1700	760	1800	760	811	226	15.8	TRA
245/70R19.5	14	133/131	L	7.50	1950	760	2060	760	839	248	15.8	TRA
245/70R19.5	16	135/133	L	7.50	2060	830	2180	830	839	248	15.8	TRA



KJT016

NEW

Radial Truck Tire(Regional Drive)

Regional Haul Application / Pickup & Delivery Service Drive.

- 1.Aggressive zigzag center grooves and open shoulder grooves provides outstanding traction in mud and snow;
- 2.Stone rejectors protect the casing in base of the tread groove;
- 3.Protect ribs on both sidewalls to fight damage from curbing, cuts and abrasions.
- 4.3D sipes lock together under compression for the stability of a solid block;
- 5.Strong carcass materials help promote tire durability and provide tire retreadability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	15.0	TRA
225/70R19.5	14	128/126	N	6.75	1700	760	1800	760	811	226	15.0	TRA



AFL866

Radial Truck Tire (Regional All Position)

- 1.Extra wide tread design for high mileage and even wear.
- 2.Zig-zag grooves for excellent handling.
- 3.Optimize structure design.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
6.00R13LT	8	93/89	L	4.50B	580	460	650	460	655	170	10.0	GB
6.00R14LT	8	95/90	L	4 1/2J	600	460	690	460	680	170	10.0	GB
6.00R15LT	8	97/92	L	4.50E	630	460	730	460	705	170	10.5	GB
7.50R15LT	8	110/105	L	6.00G	925	460	1060	460	780	215	13.0	GB
7.50R15LT	10	115/110	L	6.00G	1060	560	1215	560	780	215	13.0	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	13.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	14.0	GB
205/65R17.5	16	129/127 (132/132)	J(G)	6.00	1750	900	1850	900	711	204	12.5	ETRTO
215/70R17.5	14	123/121	L	6.00	1550	775	1450	775	747	211	14.5	JATMA
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	14.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	14.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	14.5	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	14.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	14.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	14.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.5	ETRTO
225/80R17.5	14	123/122	L	6.75	1500	700	1550	700	805	226	16.0	JATMA



AAR919

Radial Truck Tire (On&Off Road All Position)

- 1.pattern block design reduces shoulder heat.
- 2.Wide running surface and higher saturation design improves the wear mileage.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
6.00R14LT	8	95/90	K	4 1/2J	600	460	690	460	680	170	10.0	GB
6.00R15LT	8	97/92	K	4.50E	630	460	730	460	705	170	10.5	GB
6.50R16LT	12	110/105	K	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	14	118/114	K	5.50F	1180	770	1320	770	775	200	14.0	GB
7.50R16LT	14	122/118	K	6.00G	1320	770	1500	770	805	215	15.0	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	855	235	16.0	GB



ADL831

Radial Truck Tire (Regional Drive)

- 1.Typical block pattern design make good towing and grip on wet and dry road.
- 2.Strong wear resistance and long life.
- 3.Retreadability.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	18.0	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	18.0	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	18.0	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	16.0	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	16.0	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	17.0	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	17.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	17.0	ETRTO



AAR959

Radial Truck Tire (On&Off Road All Position)

1. Wide and deep tread grooves for long tire life.
2. Excellent cutting and chipping resistance.
3. Robust tread and high traction on rough surfaces.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
6.00R13LT	8	93/89	F	4.50B	580	460	650	460	655	170	12.5	GB
6.00R14LT	8	95/90	F	4 1/2J	600	460	690	460	680	170	12.5	GB
6.00R15LT	8	97/92	F	4.50E	630	460	730	460	705	170	12.5	GB
6.50R16LT	12	110/105	F	5.50F	925	670	1060	670	750	185	13.5	GB
7.00R16LT	14	118/114	F	5.50F	1180	770	1320	770	783	200	17.0	GB
7.50R16LT	14	122/118	F	6.00G	1320	770	1500	770	815	215	18.0	GB
8.25R16LT	16	128/124	D	6.50H	1600	770	1800	770	865	235	18.0	GB
9.00R16LT	16	134/129	D	6.50H	1850	770	2120	770	900	255	18.0	GB



F830

Radial Truck Tire (Regional All Position)

Suitable for small trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	10.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	10.5	GB



LLF26

Radial Truck Tire (Regional All Position)

Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
8.25R15TR	12	126/124	M	6.50	1600	720	1700	720	847	236	12.5	TRA
8.25R15TR	14	129/127	L	6.50	1750	830	1850	830	847	236	12.5	TRA
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	11.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	11.5	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	12.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	12.5	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	12.5	GB
8.5R17.5	12	121/120	M	6.00	1400	625	1450	625	802	215	12.5	ETRTO
9.5R17.5	14	129/127	M	6.75	1750	750	1850	750	842	240	12.0	ETRTO
9.5R17.5	18	143/141	M/J	6.75	2575	875	2725	875	842	240	12.0	ETRTO
8R19.5	12	124/122	M	6.00	1500	760	1600	760	859	203	12.5	TRA



F820

Radial Truck Tire (Regional All Position)

Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
8.5R17.5	12	121/120	M	6.00	1400	625	1450	625	802	215	13.0	ETRTO
205/75R17.5	14	124/122	M	6.00	1500	750	1600	750	753	204	12.5	ETRTO
215/75R17.5	12	124/123	M	6.00	1550	675	1600	675	767	211	12.5	ETRTO
215/75R17.5	14	126/124	L/M	6.00	1600	700	1700	700	767	211	12.5	ETRTO
215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	211	12.5	ETRTO
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	13.0	ETRTO
235/75R17.5	16	141/140	L	6.75	2500	850	2575	850	797	233	13.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	13.0	ETRTO
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	12.5	TRA
225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	12.5	TRA
245/70R19.5	12	129/127	M	7.50	1750	660	1850	660	839	248	13.0	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	13.0	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	13.0	ETRTO
245/70R19.5	16	136/134	L/M	7.50	2120	825	2240	825	839	248	13.0	ETRTO



LLF86

Radial Truck Tire (Regional All Position)

Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
215/75R17.5	14	126/124	L/M	6.00	1600	700	1700	700	767	211	12.0	ETRTO
215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	211	12.0	ETRTO



LLA78

Radial Truck Tire (Regional All Position)

Suitable for medium trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	12.0	ETRTO
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	13.0	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	13.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	13.0	ETRTO



D905

Radial Truck Tire (Regional Drive)

- 1.Suitable for medium trucks running on the high-grade road.
- 2.Good braking and grip on wet road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
245/70R17.5	18	143/141	L	7.50	2575	875	2725	875	789	248	18.0	ETRTO
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	15.0	GB
225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	15.0	GB
245/70R19.5	14	133/131	L	7.50	1950	760	2060	760	839	248	16.5	TRA
245/70R19.5	14	133/131	L	7.50	1950	750	2060	750	839	248	16.5	ETRTO
245/70R19.5	16	136/134	L	7.50	2120	825	2240	825	839	248	16.5	ETRTO
215/75R17.5	12	124/123	M	6.00	1550	675	1600	675	767	211	15.0	ETRTO
215/75R17.5	14	126/124	L/M	6.00	1600	700	1700	700	767	211	15.0	ETRTO
215/75R17.5	16	135/133	J/L	6.00	2060	850	2180	850	767	211	15.0	ETRTO
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	15.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	15.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	15.5	ETRTO



D955

Radial Truck Tire (On&Off Road Drive)

- 1.Suitable for medium trucks running on the normal road.
- 2.Good braking and grip on wet road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	12.5	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	14.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	14.5	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	15.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	15.5	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	15.5	GB
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	14.5	TRA
225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	14.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	760	2060	760	839	248	15.5	TRA
245/70R19.5	14	133/131	M	7.50	1950	750	2060	750	839	248	15.5	ETRTO
245/70R19.5	16	136/134	L	7.50	2120	825	2240	825	839	248	15.5	ETRTO



LLA08

Radial Truck Tire (On&Off Road All Position)

- 1.Suitable for medium trucks running on the normal road.
- 2.Typical combined pattern.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	10.5	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	10.5	GB
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	12.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	12.5	GB
8.25R16LT	12	123/119	M	6.50H	1360	560	1550	560	855	235	13.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	13.5	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	13.5	GB
9.00R16LT	14	131/126	L	6.50H	1700	670	1950	670	890	255	14.5	GB
9.00R16LT	16	134/129	L	6.50H	1850	770	2120	770	890	255	14.5	GB



LLD09

Radial Truck Tire (On&Off Road Drive)

- 1.Suitable for medium trucks running on the normal road.
- 2.Typical combined pattern.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	12.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	12.5	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	13.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.5	GB
8.25R16LT	12	123/119	L	6.50H	1360	560	1550	560	855	235	14.5	GB
8.25R16LT	14	126/122	K	6.50H	1500	670	1700	670	855	235	14.5	GB
8.25R16LT	16	128/124	K	6.50H	1600	770	1800	770	855	235	14.5	GB
215/75R17.5	12	124/123	K	6.00	1550	675	1600	675	767	211	14.0	ETRTO
215/75R17.5	14	126/124	K	6.00	1600	700	1700	700	767	211	14.0	ETRTO
215/75R17.5	16	128/126	K	6.00	1700	750	1800	750	767	211	14.0	ETRTO
215/75R17.5	16	135/133	K	6.00	2060	850	2180	850	767	211	14.0	ETRTO
235/75R17.5	14	132/130	K	6.75	1900	775	2000	775	797	233	15.0	ETRTO
235/75R17.5	16	141/140	K	6.75	2500	850	2575	850	797	233	15.0	ETRTO
235/75R17.5	18	143/141	K	6.75	2575	875	2725	875	797	233	15.0	ETRTO



AAM903

Radial Truck Tire (On&Off Road All Position)

- 1.Suitable for medium trucks running on on/off road.
- 2.High traction.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.50R16LT	8	112/107	L/M	6.00G	975	460	1120	460	805	215	9.5	GB



D969

Radial Truck Tire (Off Road All Position)

- 1.Good traction resistance.
- 2.Chip,cut and abrasion resistance tread compound.
- 3.Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
7.00R16LT	12	115/110	F	5.50F	1060	670	1215	670	775	200	15.5	GB
7.00R16LT	14	118/114	F	5.50F	1180	770	1320	770	775	200	15.5	GB
7.50R16LT	12	120/116	F	6.00G	1250	670	1400	670	815	215	17.5	GB
7.50R16LT	14	122/118	F	6.00G	1320	770	1500	770	815	215	17.5	GB
8.25R16LT	12	123/119	F	6.50H	1360	560	1550	560	865	235	17.5	GB
8.25R16LT	14	126/122	F	6.50H	1500	670	1700	670	865	235	17.5	GB
8.25R16LT	16	128/124	F	6.50H	1600	770	1800	770	865	235	17.5	GB



ADO993

Radial Truck Tire (Off Road All Position)

- 1. Off-road pattern block ensures powerful traction and good self-cleaning ability.
- 2. Chip, cut and abrasion resistance tread compound.
- 3. Deep tread depth increases mileage and service life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
6.50R16LT	12	110/105	F	5.50F	925	670	1060	670	750	185	13.5	GB
7.00R16LT	14	118/114	F	5.50F	1180	770	1320	770	775	200	14.5	GB
7.50R16LT	14	122/118	F	6.00G	1320	770	1500	770	815	215	16.5	GB
8.25R16LT	16	128/124	F	6.50H	1600	770	1800	770	865	235	18.0	GB



AAL812

Radial Truck Tire (Regional All Position)

Suitable for small trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
195/85R16LT	12	114/112	L	5 1/2J	1120	600	1180	600	738	196	10.0	JATMA
205/85R16LT	10	117/115	L	5 1/2J	1215	600	1285	600	754	203	10.0	JATMA



AAL867

Radial Truck Tire (Regional All Position)

Suitable for small trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
195/85R16LT	12	114/112	L	5 1/2J	1120	600	1180	600	738	196	10.0	JATMA
205/85R16LT	10	117/115	L	5 1/2J	1215	600	1285	600	754	203	10.0	JATMA



F835

Radial Truck Tire (Regional All Position)

Suitable for small trucks running on the high-grade road.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
LT225/75R16	12	119/116	N	6.00	1250	650	1360	650	744	223	11.1	TRA
LT245/75R16	12	123/120	N	7.00	1400	650	1550	650	774	248	11.1	TRA
LT235/85R16	14	126/123	L	6 1/2J	1550	750	1700	750	806	235	8.9	--
ST235/85R16	14	132/127	L	6 1/2J	1750	760	2000	760	806	235	8.9	TRA

Coach & Urban





ADU610

Radial Bus Tire (Urban Drive)

- 1.Enhanced sidewall ensures high safety.
- 2.Tire strength is increased by 35%,with application of ST steel cord.
- 3.Tire bead cracking is prevented,with application fiber layer in bead area.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	16	146/143	J	8.25	2725	830	3000	830	1054	279	21.5	TRA
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1050	279	21.5	ETRTO



AAU609

Radial Bus Tire (Urban All Position)

- 1.Enhanced sidewall ensures high safety.
- 2.Tire strength is increased by 35%,with application of ST steel cord.
- 3.Tire bead cracking is prevented,with application fiber layer in bead area.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
305/70R22.5	20	152/150 (154/150)	J(F)	9.00	3350	900	3550	900	1000	305	21.0	ETRTO
275/70R22.5	16	148/145 (152/148)	J(E)	8.25	2900	900	3150	900	958	276	21.0	ETRTO
275/70R22.5	18	150/148 (152/148)	J(E)	8.25	3150	900	3350	900	958	276	21.0	ETRTO
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1050	279	21.0	ETRTO



AAU802

Radial Bus Tire (Urban All Position)

- 1.Enhanced sidewall ensures high safety.
- 2.Long service life.
- 3.Typical used for urban bus.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	16	146/143	F	8.25	2725	830	3000	830	1054	279	20.0	TRA
11R22.5	16	148/145	J	8.25	2900	850	3150	850	1050	279	20.0	ETRTO
255/70R22.5	16	140/137	J	7.50	2300	800	2500	800	930	255	19.0	ETRTO
275/70R22.5	16	148/145 (152/148)	J(E)	8.25	2900	900	3150	900	958	276	19.5	ETRTO
305/70R22.5	16	152/148 (154/150)	J(E)	9.00	3150	900	3550	900	1000	305	20.0	ETRTO
295/80R22.5	16	152/148 (154/150)	J(E)	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
295/80R22.5	18	152/149	J	9.00	3250	900	3550	900	1044	298	20.0	GB



AAU608

Radial Bus Tire (Coach All Position)

- 1.Enhanced sidewall ensures high safety.
- 2.Tire strength is increased by 35%,with application of ST steel cord.
- 3.Good wet traction.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	17.0	ETRTO



AAU603

Radial Bus Tire (Coach All Position)

- 1.Suitable for all axle of bus riding on highway.
- 2.Long life.
- 3.Good grip performance.
- 4.low eccentric wear.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
9R22.5	14	136/134	M	6.75	2120	830	2240	830	974	229	15.0	TRA
10R22.5	14	141/139	M	7.50	2430	790	2575	790	1019	254	15.0	TRA
10R22.5	14	144/142	L	7.50	2650	850	2800	850	1020	254	15.0	ETRTO
11R22.5	14	144/142	M	8.25	2650	720	2800	720	1054	279	16.0	TRA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	16.0	TRA
11R22.5	16	148/145	M	8.25	2900	850	3150	850	1050	279	16.0	ETRTO
12R22.5	16	152/148	M	9.00	3150	850	3550	850	1084	300	17.0	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	16.0	ETRTO
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	17.0	ETRTO
295/80R22.5	18	152/149	M	9.00	3250	900	3550	900	1044	298	17.0	GB



AAU605

Radial Bus Tire (Small Bus All Position)

- 1.Extra wide tread design for high mileage and even wear.
- 2.Zig-zag grooves for excellent handling.
- 3.Optimize structure design.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
6.00R15LT	8	97/92	L	4.50E	630	460	730	460	705	170	10.5	GB
7.50R15LT	8	110/105	L	6.00G	925	460	1060	460	780	215	13.0	GB
7.50R15LT	10	115/110	L	6.00G	1060	560	1215	560	780	215	13.0	GB
6.50R16LT	12	110/105	L	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
7.50R16LT	12	120/116	M	6.00G	1250	670	1400	670	805	215	13.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB
8.25R16LT	16	128/124	L	6.50H	1600	770	1800	770	855	235	14.0	GB
8R22.5	14	130/128	M	6.00	1800	830	1900	830	935	203	14.0	GB
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	14.5	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	14.5	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	14.5	ETRTO
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	14.5	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	14.5	ETRTO
235/75R17.5	14	132/130	M	6.75	1900	775	2000	775	797	233	14.5	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.5	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.5	ETRTO
225/80R17.5	14	123/122	L	6.75	1500	700	1550	700	805	226	16.0	JATMA

A large truck is driving on a snowy road at night. The road is covered in a thick layer of snow, and the truck's headlights are illuminating the path ahead. The sky is dark, and there are snow-covered mountains in the background. The overall scene is a winter night driving scene.

Winter



KWS600

NEW

Radial Truck Tire On Ice And Snow

Suitable for steer axle of trucks under snow condition.

1. Lasting grip and stability ,with M+S and 3PMSF marking.
2. Optimized rib contact combats uneven wear and improves wet handling and braking.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	16.0	ETRTO
295/80R22.5	18	154/149	M	9.00	3250	850	3750	850	1044	298	16.0	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	15.0	ETRTO
315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	15.5	ETRTO
315/80R22.5	22	158/150 (154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.5	ETRTO
385/55R22.5	18	158	L	12.25	--	--	4250	850	996	386	14.5	ETRTO
385/55R22.5	20	160(158)	K(L)	12.25	--	--	4500	900	996	386	14.5	ETRTO
385/65R22.5	20	160(158)	K(L)	11.75	--	--	4500	900	1072	389	15.5	ETRTO
385/65R22.5	24	164(158)	K(L)	11.75	--	--	5000	900	1072	389	15.5	ETRTO




KWD600

NEW

Radial Truck Tire On Ice And Snow

Suitable for drive axle of trucks under snow condition.

1. Lasting grip and stability ,with M+S and 3PMSF marking.
2. Optimized rib contact combats uneven wear and improves wet handling and braking.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
295/80R22.5	16	152/148	M	9.00	3150	850	3550	850	1044	298	20.5	ETRTO
315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	20.0	ETRTO
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	22.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	22.0	ETRTO



KWD700

NEW

Radial Truck Tire On Ice Snd Snow

Long Haul Application Drive.

- 1.3D Kerf technology provides excellent traction and long original tread life;
- 2.Wide tread design and combined structure of rib and block pattern provides stability, longer mileage and better handling performance in all weather conditions;
- 3.Long life, low rolling resistance;
- 4.Optimizes the footprint for even wear and long tread life;
- 5.Strong carcass materials help promote tire durability and provide tire retreadability.




Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
11R22.5	16	146/143	L	8.25	2725	830	3000	830	1065	279	21.5	TRA
11R24.5	16	149/146	L	8.25	3000	830	3250	830	1116	279	21.5	TRA



ADW807

Radial Truck Tire On Ice And Snow (Drive)

- 1.High safety and good handling.
- 2.Optimized rib contact combats uneven wear and improves wet handling and braking.
- 3.Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	11.0	GB
6.50R16LT	12	110/105	M	5.50F	925	670	1060	670	750	185	11.0	GB
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	14.5	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	15.5	GB
11R22.5	16	146/143	M	8.25	2725	800	3000	800	1054	279	20.0	JATMA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	20.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	20.0	ETRTO
315/70R22.5	16	154/150	L	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	20.0	ETRTO
295/80R22.5	16	150/147	K	9.00	3075	830	3350	830	1044	298	20.0	GB
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	20.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	20.0	ETRTO



ADW808

Radial Truck Tire On Ice And Snow (All Position)

- 1.High safety and good handling.
- 2.Optimized rib contact combats uneven wear and improves wet handling and braking.
- 3.Long life.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
6.00R14LT	8	95/90	L	4 1/2J	600	460	690	460	680	170	10.0	GB
6.50R16LT	12	110/105	M	5.50F	925	670	1060	670	750	185	12.0	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	13.0	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	13.0	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	15.0	GB
245/70R17.5	14	134/132	M	7.50	2000	775	2120	775	789	248	15.0	ETRTO
245/70R17.5	16	136/134	M	7.50	2120	850	2240	850	789	248	15.0	ETRTO
245/70R17.5	18	143/141	J	7.50	2575	875	2725	875	789	248	15.0	ETRTO
225/70R19.5	12	125/123	M	6.75	1550	660	1650	660	811	226	15.0	GB
225/70R19.5	14	128/126	M	6.75	1700	760	1800	760	811	226	15.0	GB
215/75R17.5	14	126/124	M	6.00	1600	700	1700	700	767	211	13.0	ETRTO
215/75R17.5	16	135/133	J	6.00	2060	850	2180	850	767	211	13.0	ETRTO
215/75R17.5	14	125/122	M	6.00	1500	760	1650	760	767	211	13.0	GB
215/75R17.5	16	127/124	J	6.00	1600	830	1750	830	767	211	13.0	GB
235/75R17.5	14	132/130	L/M	6.75	1900	775	2000	775	797	233	14.0	ETRTO
235/75R17.5	16	141/140	J	6.75	2500	850	2575	850	797	233	14.0	ETRTO
235/75R17.5	18	143/141	J	6.75	2575	875	2725	875	797	233	14.0	ETRTO
235/75R17.5	14	129/126	L	6.75	1700	760	1850	760	797	233	14.0	GB
235/75R17.5	16	132/129	J	6.75	1850	830	2000	830	797	233	14.0	GB



AFW806

Radial Truck Tire On Ice And Snow (All Position)

- 1.High safety and good handling.
- 2.Optimized rib contact combats uneven wear and improves wet handling and braking.
- 3.Low noise.



Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm
					Dual		Single					
					kg	kpa	kg	kpa				
6.50R16LT	10	107/102	M	5.50F	850	560	975	560	750	185	11.0	GB
6.50R16LT	12	110/105	M	5.50F	925	670	1060	670	750	185	11.0	GB
7.00R16LT	12	115/110	M	5.50F	1060	670	1215	670	775	200	11.5	GB
7.00R16LT	14	118/114	L	5.50F	1180	770	1320	770	775	200	11.5	GB
7.50R16LT	14	122/118	M	6.00G	1320	770	1500	770	805	215	12.0	GB
8.25R16LT	14	126/122	L	6.50H	1500	670	1700	670	855	235	12.5	GB
11R22.5	16	146/143	M	8.25	2725	800	3000	800	1054	279	15.0	JATMA
11R22.5	16	146/143	M	8.25	2725	830	3000	830	1054	279	15.0	TRA
11R22.5	16	148/145	L	8.25	2900	850	3150	850	1050	279	15.0	ETRTO
11R24.5	14	146/143	M	8.25	2725	720	3000	720	1104	279	15.0	TRA
11R24.5	16	149/146	M	8.25	3000	830	3250	830	1104	279	15.0	TRA
385/65R22.5	20	160(158)	J(L)	11.75	--	--	4500	900	1072	389	16.5	ETRTO
275/70R22.5	16	148/145	M	8.25	2900	900	3150	900	958	276	15.0	ETRTO
275/70R22.5	16	144/141	M	8.25	2575	830	2800	830	958	276	15.0	GB
315/70R22.5	16	154/150	L	9.00	3350	900	3750	900	1014	312	15.0	ETRTO
295/75R22.5	14	144/141	M	9.00	2575	760	2800	760	1026	298	15.0	TRA
295/75R22.5	16	146/143	M	9.00	2725	830	3000	830	1026	298	15.0	TRA
295/80R22.5	16	152/148	K	9.00	3150	850	3550	850	1044	298	15.0	ETRTO
295/80R22.5	16	150/147	K	9.00	3075	830	3350	830	1044	298	15.0	GB
315/80R22.5	18	154/150	K	9.00	3350	825	3750	825	1076	312	15.0	ETRTO
315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	15.0	ETRTO




SPECIALTY TIRE

—
OTR



Radial OTR

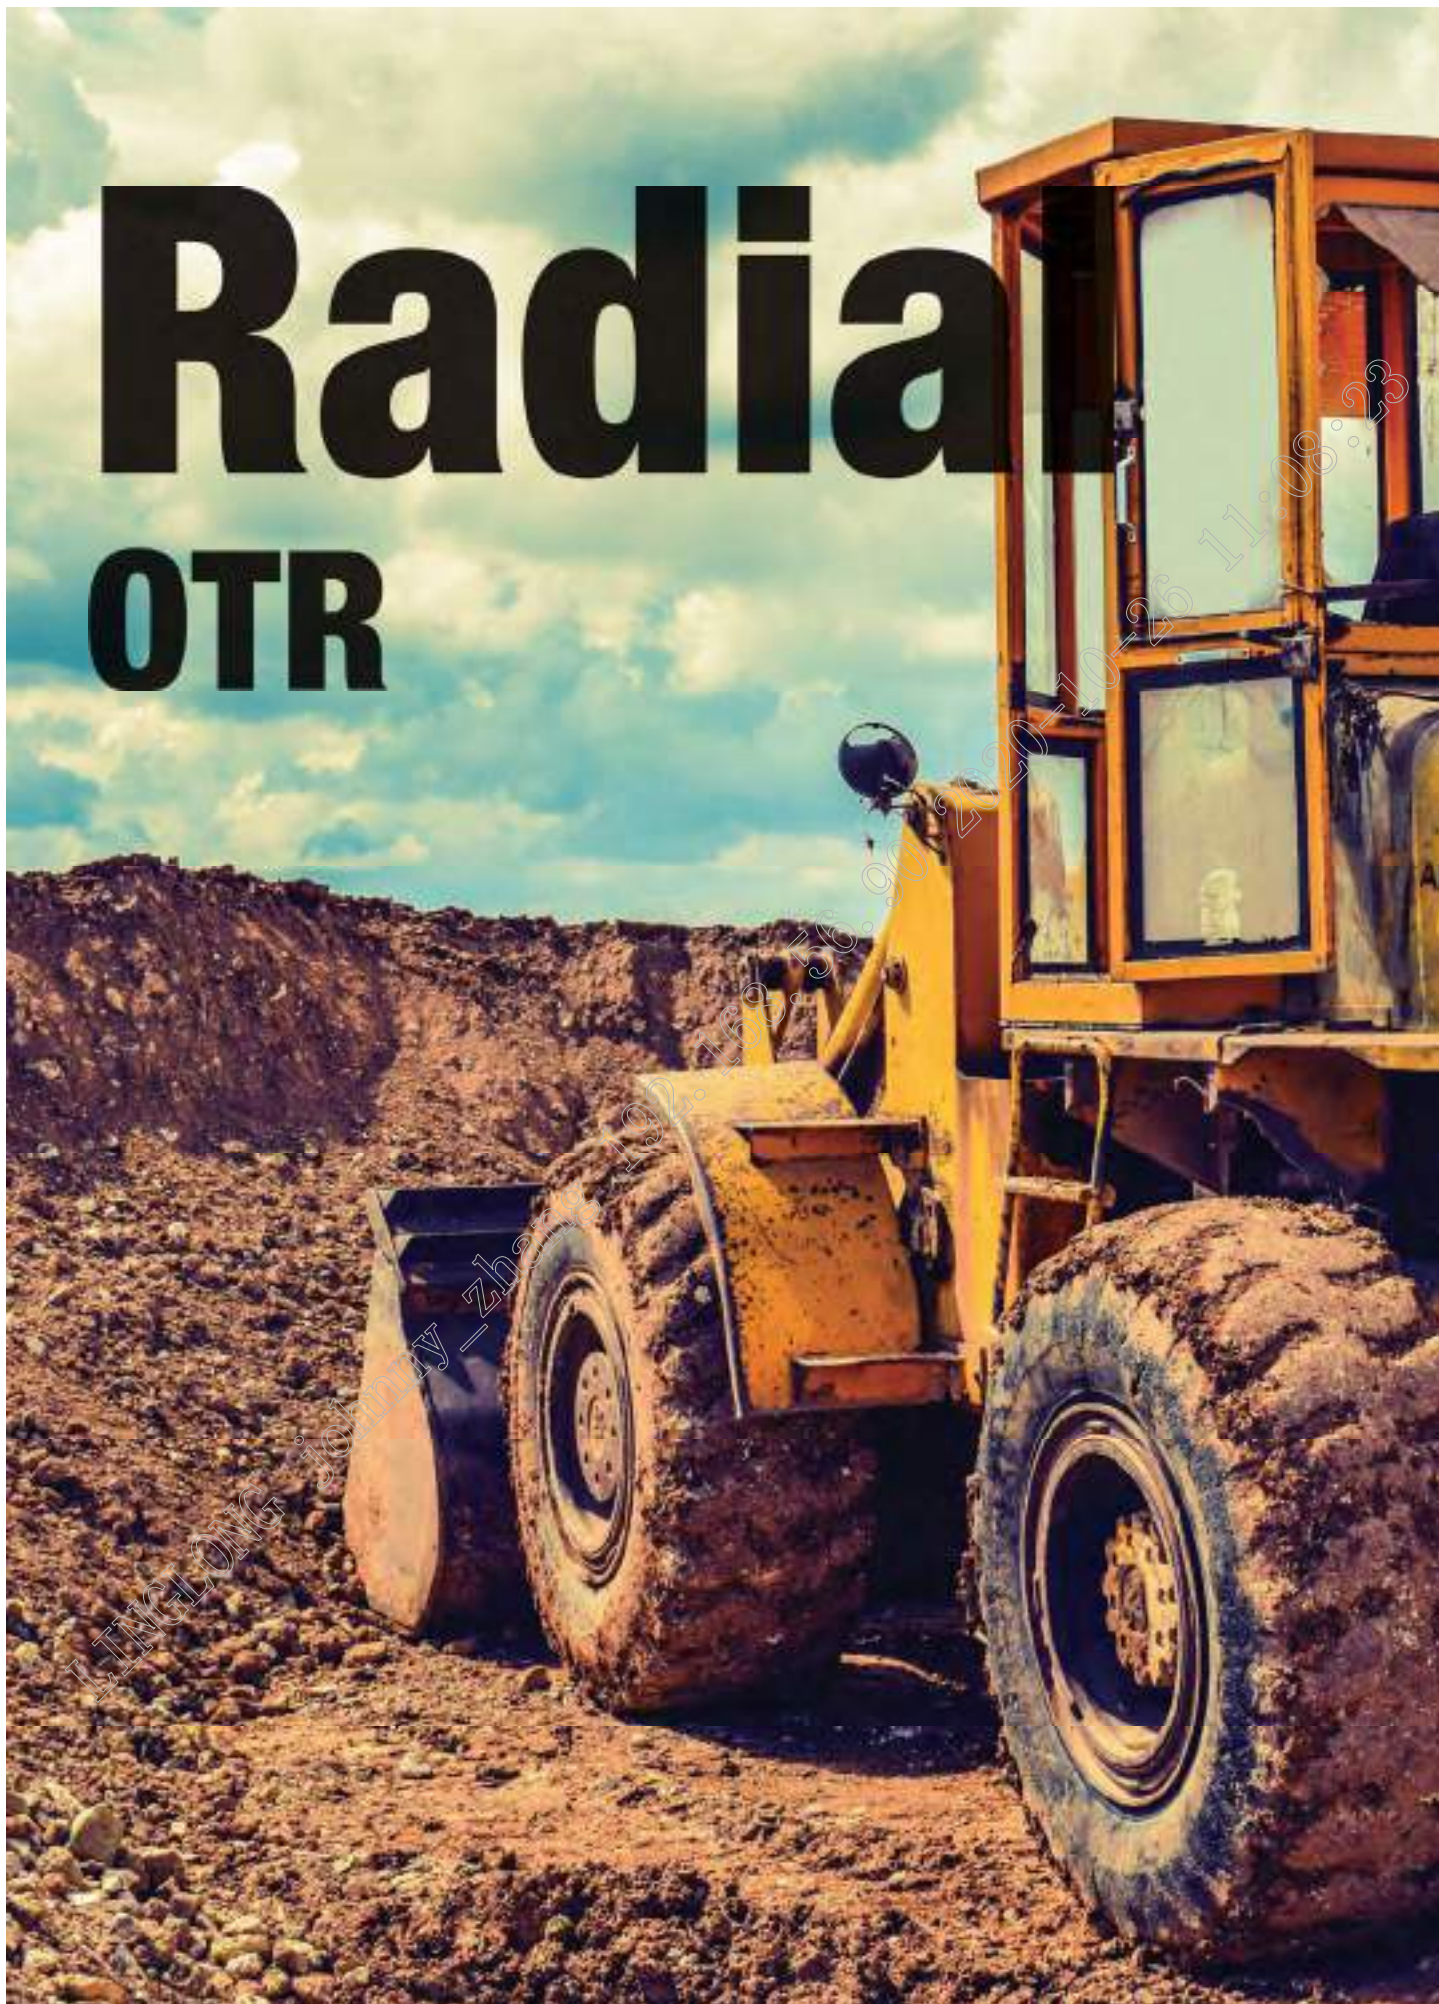

Dump Truck



LMS401(E-4)

Radial OTR

- Exceptional traction

Massive tread blocks characterise this tyre, it delivers excellent tractive performance, better lateral adhesion and more efficient loading for machines working at the face.

- Good self cleaning

Flower chimb angle changed design, it delivers good self cleaning.

- Operating comfort

A wide, square tread gives better stability in loading operations and whilst travelling.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY(kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
23.5R25	☆☆	185	201	19.5/2.5	9250	475	14500	600	1673	597	51.0
26.5R25	☆☆	193	209	22.00/3.0	11500	475	18500	600	1798	673	56.0
29.5R25	☆☆	200	216	25.00/3.5	14000	475	22400	600	1921	750	61.0



DO993(E-3/L-3)

Radial OTR

1.Good traction resistance.

2.Chip,cut and abrasion resistance tread compound.

3.Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY(kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
13.00R25	☆☆☆	163	182	8.50	4875	700	8500	950	1300	350	30.0
14.00R24	☆☆☆	169	188	10.00	5800	700	10000	950	1370	375	30.0
14.00R25	☆☆☆	169	188	10.00	5800	700	10000	950	1370	375	30.0



DO993+(E-3/L-3)

Radial OTR

1. Good traction resistance.
2. Chip, cut and abrasion resistance tread compound.
3. Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY(kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
13.00R25	☆☆☆	163	182	8.50	4875	700	8500	950	1300	350	28.0
14.00R24	☆☆☆	169	188	10.00	5800	700	10000	950	1370	375	28.0
14.00R25	☆☆☆	169	188	10.00	5800	700	10000	950	1370	375	28.0



LB02S(E-4)

Radial OTR

1. Exceptional traction and manoeuvrability.
2. Good flotation.
3. Excellent stability and comfort.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY(kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
18.00R33	☆☆	191	209	13.00/2.5	10900	650	18500	800	1877	498	53.0



LB03S(E-4)

Radial OTR

1. High safety.
2. Wide contact area with ground provides strong grip.
3. Low noise.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY(kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
16.00R25	☆☆	177	195	11.25/2.0	7300	650	12150	800	1548	432	42.0
18.00R25	☆☆	185	204	13.00/2.5	9250	650	16000	800	1673	498	46.0



LB06S(E-3)

Radial OTR

1. Good traction and wear resistance.
2. Excellent tear resistance.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY(kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
750/65R25	☆☆	190	209	24.00/3.0	10600	425	18500	625	1610	754	45.0
26.5R25	☆☆	193	209	22.00/3.0	11500	475	18500	600	1750	673	44.0
29.5R25	☆☆	200	216	25.00/3.5	14000	475	22400	600	1873	750	44.0



DM992(E-3/L-3)

Radial OTR

1. Long life.
2. Excellent adhesion and traction in bad conditions.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY(kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
13.00R25	☆☆☆	163	182	8.50	4875	700	8500	950	1300	350	26.0
14.00R24	☆☆☆	169	188	10.00	5800	700	10000	950	1370	375	26.0
14.00R25	☆☆☆	169	188	10.00	5800	700	10000	950	1370	375	24.0



DM992+(E-3/L-3)

Radial OTR
1.Long life.
2.Excellent adhension and traction in bad conditions.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY(kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
13.00R25	☆☆☆	163	182	8.50	4875	700	8500	950	1300	350	26.0
14.00R24	☆☆☆	169	188	10.00	5800	700	10000	950	1370	375	26.0

Loader



LB01N(E-3/L-3)

Radial OTR
1.Exceptional traction and manoeuvreability.
2.Good flotation.
3.Excellent stability and comfort.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY(kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
17.5R25	☆☆	167	182	14.00/1.5	5450	475	8500	600	1348	445	27.0
20.5R25	☆☆	177	193	17.00/2.0	7300	475	11500	600	1492	520	30.0
23.5R25	☆☆	185	201	19.5/2.5	9250	475	14500	600	1617	597	33.0
26.5R25	☆☆	193	209	22.00/3.0	11500	475	18500	600	1750	673	36.0
29.5R25	☆☆	200	216	25.00/3.5	14000	475	22400	600	1873	750	39.0



LM01N(E-3/L-3)

Radial OTR

- 1.Exceptional traction and manoeuvrability.
- 2.Good flotation.
- 3.Excellent stability and comfort.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY(kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
23.5R25	☆☆	185	201	19.5/2.5	9250	475	14500	600	1617	597	30.5



LB03SD(L-5)

Radial OTR

- Exceptionally robust in masacre conditions

A substantial crown, robust shoulders reinforced with a protection band make up a tyre particularly resistant to shock ruptures, cuts and tread tearing.

A particularly resilient casing with the addition of several specific steel belts constitute a tyre that is very resistant to punctures.

- Excellent compromise of adhesion and traction

A very substantial, wide and aggressive tread functions perfectly to produce a good compromise between adhesion,traction and damage resistance.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY(kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
17.5R25	☆☆	167	182	14.00/1.5	5450	475	8500	600	1399	445	64.0
20.5R25	☆☆	177	193	17.00/2.0	7300	475	11500	600	1548	520	71.0
23.5R25	☆☆	185	201	19.5/2.5	9250	475	14500	600	1673	597	77.5
26.5R25	☆☆	193	209	22.00/3.0	11500	475	18500	600	1798	673	86.5
29.5R25	☆☆	200	216	25.00/3.5	14000	475	22400	600	1921	750	94.0



LB02SD(L-5)

Radial OTR

- Exceptional traction

Massive tread blocks characterise this tyre.

- High Efficiency

The extra deep tread pattern (L5) of this tyre gives outstanding wear life potential.

The sidewall/tread intersection design gives an excellent level of damage and cut resistance.

- Operating comfort

A wide, square tread gives better stability in loading operations and whilst travelling.

A directional pattern.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY(kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
20.5R25	☆☆	177	193	17.00/2.0	7300	475	11500	600	1548	520	71.0
23.5R25	☆☆	185	201	19.5/2.5	9250	475	14500	600	1673	597	77.5
26.5R25	☆☆	193	209	22.00/3.0	11500	475	18500	600	1798	673	86.5
29.5R25	☆☆	200	216	25.00/3.5	14000	475	22400	600	1921	750	94.0

Snow Works



LSN201 (E-2/L-2)

Radial OTR

- 1.Good traction resistance.

- 2.Chip,cut and abrasion resistance tread compound.

- 3.Deep tread depth increases mileage and service life.

Size	Ply Rating	Load Index		Rim	LOAD CAPACITY(kg)				Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
		TRANSP 50km/h Speed Symbol B	LOADING 10km/h Speed Symbol A2		TRANSPORT		LOADING				
					LOAD 50km/h Speed Symbol B (kg)	Inflated Pressure (kPa)	LOAD 10km/h Speed Symbol A2 (kg)	Inflated Pressure (kPa)			
15.525	☆☆	160	176	12.00/1.3	4500	475	7100	600	1277	394	25.0
17.525	☆☆	167	182	14.00/1.5	5450	475	8500	600	1348	445	28.0
20.525	☆☆	177	193	17.00/2.0	7300	475	11500	600	1492	520	32.0
23.525	☆☆	185	201	19.50/2.5	9250	475	14500	600	1617	597	33.0
26.525	☆☆	193	209	22.00/3.0	11500	475	18500	600	1750	673	36.0

Sand



LD702(E-7)

Radial OTR

- 1.The combination of vertical and horizontal pattern groove.
- 2.Strengthened bead area and Tubeless solution preventing sudden pressure loss.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
24R20.5 (605/70R20.5)	☆ /16	176	F	18.00	7100	600	1370	600	21.0

Mobile Crane



LM11N

Radial OTR

- 1.Exceptional traction and manoeuvrability.
- 2.Good flotation.
- 3.Excellent stability and comfort.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Standard Load (kg)	Inflated Pressure (kPa)	Overall Diameter (mm)	Overall Width (mm)	Tread Depth (mm)
445/95R25	☆☆	177	E	11.25/2.0	7300	900	1481	435	23.0
385/95R25	☆☆	170	E	10.00/1.5	6000	900	1369	379	21.0

Bias

OTR



Dump Truck



NEW

EM01(E-3)

OTR Tire

- 1.Deep tread pattern ensure tyre life.
- 2.Wider tread blocks enhance traction performance.
- 3.Special compound design ,low heat-generation,excellent wear and tear resistance.
- 4.Available for large rigid dump trucks.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
14.00-24	24	10.0	9500	850	5150	575	375	1370	34.0	TT
14.00-24	28	10.0	10000	925	5600	650	375	1370	34.0	TT
14.00-25	28	10.00/1.5	10000	925	5600	650	375	1370	33.0	TT



NEW

EM02(E-4)

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
21.00-35	40	15.00/3.0	24300	825	14000	625	570	2050	60.0	TL
24.00-35	42	17.00/3.5	29000	750	16500	550	655	2175	60.0	TL



NEW

EM03(E-4)

OTR Tire

- 1.Deep tread pattern ensure tyre life.
- 2.Wider tread blocks enhance traction performance.
- 3.Special compound design ,low heat-generation,excellent wear and tear resistance.
- 4.Available for large rigid dump trucks.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
12.00-24	24	8.5	7500	975	4125	650	315	1275	40	TT



LL131(E-3)

OTR Tire

- 1.Available for large rigid dump trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
13.00-25	28	8.50	--	--	4800	710	335	1300	24.5	TT



LL42(E-3)

OTR Tire

- 1.Available for large rigid dump trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
14.00-24	16	10.0	7300	550	4000	375	375	1370	27.0	TT
14.00-24	24	10.0	9500	850	5150	575	375	1370	27.0	TT
14.00-24	28	10.0	10000	925	5600	650	375	1370	27.0	TT
14.00-25	28	10.00/1.5	10000	925	5600	650	375	1370	27.0	TT
14.00-25	36	10.00/1.5	11050	1100	5500	850	375	1370	27.0	TT



LL56(E-3)

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
18.00-25	32	13.00/2.5	15000	750	8750	575	500	1615	30.0	TT
18.00-25	36	13.00/2.5	16000	850	9250	625	500	1615	30.0	TT



LL26/E-3

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
18.00-25	32	13.00/2.5	15000	750	8750	575	500	1615	30.0	TT/TL
18.00-25	40	13.00/2.5	17000	950	9750	700	500	1615	30.0	TT/TL



LL90(E-4)

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
18.00-33	32	13.00	17500	750	10000	575	500	1875	50.0	TL
18.00-33	36	13.00	18500	850	10600	625	500	1875	50.0	TL
18.00-33	40	13.00	19500	950	11200	700	500	1875	50.0	TL



E-4

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
21.00-33	32	15.00/3.0	--	--	10300	500	570	1940	42.0	TL
21.00-33	42	15.00/3.0	--	--	12400	690	570	1940	42.0	TL



E-4

OTR Tire

- 1.Available for large self-dumping trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
21.00-35	32	15.00/3.0	21200	650	12150	500	570	2050	42.0	TL
21.00-35	36	15.00/3.0	23000	750	12850	550	570	2050	42.0	TL
21.00-35	40	15.00/3.0	24300	825	14000	625	570	2050	42.0	TL



LL25(E-3)

OTR Tire

- 1.Available for large rigid dump trucks.
- 2.Wear resistance, good grip and self-cleaning performance.

Size	Ply Rating	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
16.00-25	28	11.25/2.0	11500	750	6700	575	430	1495	28.5	TT/TL
16.00-25	32	11.25/2.0	12500	875	7300	650	430	1495	28.5	TT/TL
16.00-25	36	11.25/2.0	13600	975	7750	725	430	1495	28.5	TT

Underground Work



LSM401(L-4S)

OTR Tire

- 1.Available for loaders operating under seriously tough service conditions in tunnels.
- 2.Excellent wear and cut resistance.
- 3.Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
10.00-20	14	—	—	7.5	3260	670	278	1073	35.0	TT
10.00-20	16	—	—	7.5	3535	770	278	1073	35.0	TT



LSM401(L-4S+)

OTR Tire

- 1.Available for loaders operating under seriously tough service conditions in tunnels.
- 2.Excellent wear and cut resistance.
- 3.Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
10.00-20	14	—	—	7.5	3260	670	278	1073	45.0	TT
10.00-20	16	—	—	7.5	3535	770	278	1073	45.0	TT



LSM402

OTR Tire

- 1.Special tread compound design,High wear resistance performance.
- 2.Wide tread arc and deep pattern design,Increase tyre life.
- 3.Sole sidewall protection design,Enhance puncture resistance performance.
- 4.Novel appearance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
9.00-20	14	--	--	7.0	4375	725	255	1015	35.0	TT
9.00-20	16	--	--	7.0	4750	825	255	1015	35.0	TT
10.00-20	14	--	--	7.5	3260	670	278	1073	45.0	TT
10.00-20	16	--	--	7.5	3535	770	278	1073	45.0	TT
12.00-20	18	--	--	8.5	5800	775	315	1215	55.0	TT
12.00-20	20	--	--	8.5	6150	825	315	1215	55.0	TT
12.00-24	16	--	--	8.5	6150	675	315	1245	55.0	TT
12.00-24	18	--	--	8.5	6500	750	315	1245	55.0	TT
12.00-24	20	--	--	8.5	6900	825	315	1245	55.0	TT
12.00-24	24	--	--	8.5	7500	975	278	1073	55.0	TT
14.00-24	28	--	--	10.0	10000	925	375	1420	65.0	TT
14.00-24	32	--	--	10.0	10900	1050	375	1420	65.0	TT
17.5-25	20	--	--	14.00/1.5	8250	575	395	1350	65.0	TT
17.5-25	32	--	--	14.00/1.5	11700	830	395	1350	65.0	TT
18.00-25	32	--	--	13.00/2.5	15000	750	495	1615	85.0	TL
18.00-25	40	--	--	13.00/2.5	17000	950	495	1615	85.0	TL

Loader



LL25(E-3/L-3)

OTR Tire

- 1.Available for loaders and dozers.
- 2.Wear and puncture resistance.
- 3.Wide application.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
					Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
15.5-25	12	--	--	12.00/1.3	5600	400	3250	250	395	1275	25.0	TL
17.5-25	12	--	--	14.00/15	6150	350	3650	225	445	1350	25.5	TT/TL
17.5-25	16	--	--	14.00/15	7300	475	4250	300	445	1350	25.5	TT/TL
20.5-25	16	--	--	17.00/2.0	8250	350	5450	275	520	1490	28.5	TT/TL
20.5-25	20	--	--	17.00/2.0	9500	450	6000	325	520	1490	28.5	TT/TL
23.5-25	16	--	--	19.50/2.5	9500	300	6150	225	595	1615	31.5	TT/TL
23.5-25	18	--	--	19.50/2.5	10500	350	6700	275	595	1615	31.5	TT
23.5-25	20	--	--	19.50/2.5	10900	375	7300	300	595	1615	31.5	TT/TL
23.5-25	24	--	--	19.50/2.5	12500	475	8000	350	595	1615	31.5	TT/TL
26.5-25	20	--	--	22.00/3.0	13200	350	8250	250	675	1750	35.0	TT
26.5-25	24	--	--	22.00/3.0	14000	400	9250	300	675	1750	35.0	TL
26.5-25	28	--	--	22.00/3.0	15500	475	10000	350	675	1750	35.0	TT/TL
29.5-25	28	--	--	25.00/3.5	17500	425	11500	325	750	1875	40.0	TL



LL136(E-3/L-3)

OTR Tire

- 1.Specialized pattern for sand and other soft surfaces.
- 2.High side-skid resistance and traction.
- 3.Excellent in self-cleaning,handling stability and driving comfort.
- 4.Larger contact area offers even wear and long life.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
					Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
23.5-25	16	--	--	19.50/2.5	9500	300	6150	225	595	1615	31.5	TT



E-3/L-3

OTR Tyre

- 1.Suitable for heavy loaders used on bad road condition of mine,stone pit and tunnel,etc.
- 2.Good impale and wear resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
					Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
29.5-29	28	--	--	25.00/3.5	19000	425	12150	325	750	1975	40.0	TL



LL55(E-3)

OTR Tire

- 1.Available for loaders and dozers.
- 2.Wear and puncture resistance.
- 3.Wide application.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
					Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
16/70-20	10	--	--	13	4200	325	2400	250	410	1075	20.0	TT
16/70-20	14	--	--	13	5150	450	5150	450	410	1075	20.0	TT



L301(E-3+)

OTR Tire

- 1.Deepen the pattern design, increase the service life of the tire.
- 2.Large tread pattern block design, uniform tread wear.
- 3.Special mine formula, anti cutting, anti tearing, super abrasion resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
					Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
17.5-25	12	--	--	14.00/15	6150	350	3650	225	445	1350	36.0	TT
23.5-25	16	--	--	19.50/2.5	9500	300	6150	225	595	1615	45.0	TT

Port



LP401(IND-4)

Port Tire

- 1.Extra deep tread pattern ensure tyre life.
- 2.Wider tread blocks enhance traction performance.
- 3.Special compound design for ports,low heat-generation,excellent wear and tear resistance.

Size	Ply Rating	Rim	5km/h		10km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
14.00-24	28	10.0	14500	1000	13500	1000	375	1420	53.0	TT
16.00-25	36	11.25/2.0	19700	1000	18400	1000	430	1550	67.0	TL
18.00-25	40	13.00/2.5	24600	1000	22900	1000	500	1675	72.0	TL



LP402(IND-3)

Port Tire

- 1.Extra deep tread pattern ensure tyre life.
- 2.Wider tread blocks enhance traction performance.
- 3.Special compound design for ports,low heat-generation,excellent wear and tear resistance.

Size	Ply Rating	Rim	5km/h		10km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
			Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
21.00-25	40	15.00/3.0	29310	1000	27290	1000	570	1750	44.0	TL

Graders



G-2

OTR Tire

1. Good steer and traction.
2. Off-road pattern has self-cleaning performance and comfort.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		40km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	TT/TL
					Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
13.00-24	12	--	--	8.00TG	5600	450	2725	300	335	1280	24.0	TL
13.00-24	18	--	--	8.00TG	6700	675	3500	450	335	1280	24.0	TL
14.00-24	12	--	--	8.00TG	6300	425	3075	275	360	1350	24.0	TT/TL
14.00-24	16	--	--	8.00TG	7300	550	3650	350	360	1350	24.0	TT/TL



LG201(G-2)

OTR Tire

1. Good steer and traction.
2. Off-road pattern has self-cleaning performance and comfort.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		40km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	TT/TL
					Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
16.00-24	12	--	--	11.25/2.5	7100	325	3650	225	430	1490	28.5	TT
16.00-24	16	--	--	11.25/2.5	8250	425	4500	250	430	1490	28.5	TT
16.00-24	20	--	--	11.25/2.5	9250	525	5450	420	430	1490	28.5	TT



E2/L2

OTR Tire

1. Good steer and traction.
2. Off-road pattern has self-cleaning performance and comfort.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	TT/TL
					Max.Load (kg)	Inflated Pressure (kPa)	Max.Load (kg)	Inflated Pressure (kPa)				
15.5-25	12	--	--	12.00/1.3	5600	400	3250	250	395	1275	24.0	TL
17.5-25	12	--	--	14.00/1.5	6150	350	3650	225	445	1350	25.5	TT/TL
17.5-25	16	--	--	14.00/1.5	7300	475	4250	300	445	1350	25.5	TT/TL
20.5-25	16	--	--	17.00/2.0	8250	350	5450	275	520	1490	28.5	TT/TL
20.5-25	20	--	--	17.00/2.0	9500	450	6000	325	520	1490	28.5	TT/TL
23.5-25	16	--	--	19.50/2.5	9500	300	6150	225	595	1615	31.5	TT/TL
23.5-25	20	--	--	19.50/2.5	10900	375	7300	300	595	1615	31.5	TT/TL
23.5-25	24	--	--	19.50/2.5	12500	475	8000	350	595	1615	31.5	TT

Compactions



LC101

OTR Tire

1. Available for loaders operating under seriously tough service conditions in tunnels.
2. Excellent wear and cut resistance.
3. Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	TT/TL
					Max.Load (kg)	Inflated Pressure (kPa)				
13/80-20	16	--	--	9.0	5430	800	325	1045	--	TT



LL66A

OTR Tire

- 1.Available for loaders operating under seriously tough service conditions in tunnels.
- 2.Excellent wear and cut resistance.
- 3.Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	TT/TL
					Max.Load (kg)	Inflated Pressure (kPa)				
7.50-16	14	--	--	6.00G	2390	700	215	810	--	TT
12.00-24	16	--	--	8.5	6150	675	315	1245	--	TT
12.00-24	18	--	--	8.5	6500	750	315	1245	--	TT
12.00-24	20	--	--	8.5	6900	825	315	1245	--	TT



LL66B

OTR Tire

- 1.Available for loaders operating under seriously tough service conditions in tunnels.
- 2.Excellent wear and cut resistance.
- 3.Flat and smooth tread improves the puncture resistance to stone.

Size	Ply Rating	Load Index	Speed Symbols	Rim	10km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	TT/TL
					Max.Load (kg)	Inflated Pressure (kPa)				
9.00-20	14	--	--	7.0	4375	725	255	1015	--	TT

Forestry



LL711

Logging Tire

- 1.Available for logging transport of short haul.
- 2.Good running stability and powerful grip.
- 3.Powerful resistance to wear,cut and attack.
- 4.Good traction.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
12.00-24	20	--	--	8.5	4495	750	315	1275	36.0



LML401

Logging Tire

- 1.Available for logging transport of short haul.
- 2.Good running stability and powerful grip.
- 3.Powerful resistance to wear,cut and attack.
- 4.Good traction.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
11.00-20	16	--	--	8.0	3350	810	293	1131	32.0
11.00-20	18	--	--	8.0	3650	910	293	1131	32.0

Sand



LD701

- 1.Available for gravel road.
- 2.Good delivery performance.
- 3.Low rolling resistance and good heat dissipation.
- 4.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	50km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
					Max.Load (kg)	Inflated Pressure (kPa)				
18-20	14	--	--	14.00T	4625	360	455	1090	16.0	TT/TL
20-20	16	--	--	14.00T	6000	360	505	1180	17.0	TL
22-20	14	--	--	17.0	4125	280	555	1075	18.0	TL



LL200

- 1.Available for gravel road.
- 2.Good delivery performance.
- 3.Low rolling resistance and good heat dissipation.
- 4.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	65km/h		Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
					Max.Load (kg)	Inflated Pressure (kPa)				
9.00-15	8	--	--	5.50F	945	245	235	840	8.0	TT
9.00-16	8	--	--	6.50H	985	245	245	890	8.0	TT
14.00-20	20	--	--	10.00W	2635	345	375	1220	8.5	TT



SPECIALTY TIRE

**—
Agricultural
Tire**

LIFELONG johnny_zhang 192.168.56.90 2020-10-26 11:08:51

Radial Agricultural Tire



Tractors



LR861

Radial Agricultural Tire

1. Better traction and braking performance.
2. Save work time and fuel.
3. Better running stability.
4. Suitable for modern mechanical equipment.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
280/85R24	115/112	A8/B	W9 W10	1215	160	1086	282	39.0
320/85R24	122/119	A8/B	W9 W10 W11	1500	160	1154	319	41.0
320/85R28	124/121	A8/B	W9 W10 W11	1600	160	1255	319	41.0
320/85R32	126/123	A8/B	W9 W10 W11	1700	160	1357	319	41.0
320/85R32	142/139	A8/B	W9 W10 W11	2650	400	1357	319	41.0
320/85R36	128/125	A8/B	W9 W10 W11	1800	160	1458	319	41.0
340/85R24	125/122	A8/B	W11 W12	1650	160	1188	343	42.0
340/85R28	127/124	A8/B	W11 W12	1750	160	1289	343	42.0
340/85R32	142/139	A8/B	W11 W12	2650	360	1391	343	42.0
340/85R36	132/129	A8/B	W11 W12	2000	160	1492	343	42.0
340/85R38	133/130	A8/B	W11 W12	2060	160	1543	343	42.0
380/85R24	131/128	A8/B	W11 W12 W13	1950	160	1256	380	45.0
380/85R28	133/130	A8/B	W11 W12 W13	2060	160	1357	380	45.0
380/85R30	135/132	A8/B	W11 W12 W13	2180	160	1408	380	45.0
380/85R34	137/137	A8/B	W11 W12 W13	2300	160	1510	380	45.0
380/85R34	147/147	A8/B	W11 W12 W13	3075	240	1510	380	45.0
420/85R24	137/134	A8/B	W13 W14L W15L	2300	160	1324	418	48.0
420/85R28	139/136	A8/B	W13 W14L W15L	2430	160	1425	418	48.0
420/85R30	140/137	A8/B	W13 W14L W15L	2500	160	1476	418	48.0
420/85R34	142/139	A8/B	W13 W14L W15L	2650	160	1578	418	48.0
420/85R38	144/141	A8/B	W13 W14L W15L	2800	160	1679	418	48.0
460/85R30	145/142	A8/B	W14L W15L W16L	2900	160	1544	455	51.0
460/85R34	147/144	A8/B	W14L W15L W16L	3075	160	1646	455	51.0
460/85R38	149/146	A8/B	W14L W15L W16L	3250	160	1747	455	51.0
460/85R42	150/147	A8/B	W14L W15L W16L	3350	160	1849	455	51.0
460/85R46	152/149	A8/B	W14L	3550	160	1943	464	51.0
460/85R46	158/155	A8/B	W14L	4250	240	1943	464	51.0
520/85R38	155/152	A8/B	DW16L DW18L	3875	160	1849	516	54.0
520/85R42	157/154	A8/B	DW16L DW18L	4125	160	1951	516	54.0
520/85R42	167/164	A8/B	DW16L DW18L	5450	320	1951	516	54.0
420/80R46	145/142	A8/B	W12 W13	2900	160	1840	418	47.0
420/80R46	151/148	A8/B	W12 W13	3450	240	1840	418	47.0
480/80R42	151/151	A8/B	DD16L DW16L W16L	3450	160	1835	479	49.0
480/80R42	156/156	A8/B	DD16L DW16L W16L	4000	240	1835	479	49.0
480/80R46	158/158	A8/B	DD16L DW16L W16L	4250	240	1936	479	49.0
420/90R30	142/139	A8/B	DW13 W14L	2650	160	1518	418	48.0
420/90R30	147/144	A8/B	DW13 W14L	3075	240	1518	418	48.0
320/90R46(R-1)	146/143	A8/B	W9 W10 W11	3000	320	1744	319	37.0
320/90R46(R-1)	148/148	A8/B	W9 W10 W11	3150	360	1744	319	37.0
380/90R46	149/149	A8/B	W11 W12 W13	3250	240	1852	380	45.0
380/90R46	157/157	A8/B	W11 W12 W13	4125	360	1852	380	45.0



MPT30

Radial Agricultural Tire

- 1.Suitable for steer axle .
- 2.Excellent tread life.
- 3.Long lasting casing.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
355/60R18MPT	142	J	11	2650	500	890	352	7.5



LR650

Radial Agricultural Tire

- 1.Longer service life.
- 2.Excellent stability and comfort.
- 3.More efficient traction.
- 4.Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
440/65R24	128/131	D/A8	W13 W14L W15L	1800	160	1182	441	45.0
440/65R28	131/134	D/A8	W13 W14L W15L	1950	160	1283	441	45.0
480/65R24	133/136	D/A8	W14L W15L	2060	160	1234	479	46.0
480/65R28	136/139	D/A8	W14L W15L	2240	160	1335	479	46.0
540/65R24	140/143	D/A8	W16L W18L	2500	160	1312	550	48.0
540/65R28	142/145	D/A8	W16L W18L	2650	160	1413	550	48.0
540/65R30	150/153	D/A8	W16L W18L	3350	240	1464	550	48.0
540/65R34	145/148	D/A8	W16L W18L	2900	160	1566	550	48.0
540/65R38	153/156	D/A8	W16L W18L	3650	240	1667	550	48.0
600/65R28	147/150	D/A8	DW20B W18L	3075	160	1491	591	52.0
600/65R34	157/160	D/A8	DW20B W18L	4125	240	1644	591	52.0
600/65R38	153/156	D/A8	DW20B W18L	3650	160	1745	591	52.0
650/65R38	157/160	D/A8	DW20B	4125	160	1811	645	56.0
650/65R42	165/168	D/A8	DW20B	5150	240	1913	645	56.0
710/70R38	166/169	D/A8	DW23B	5300	160	1959	716	57.0
710/70R42	168/171	D/A8	DW23B	5600	160	2061	716	57.0
710/70R42	173/176	D/A8	DW23B	6500	240	2061	716	57.0



LR700

Radial Agricultural Tire

1. Saving time and fuel.
2. Better self-cleaning capability.
3. Comfort on the road and in the field.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
360/70R24	122/119	A8/B	W10 W11 W12	1500	160	1152	357	42.0
360/70R24	127/124	A8/B	W10 W11 W12	1750	240	1152	357	42.0
380/70R24	125/125	A8/B	W11 W12 W13	1650	160	1190	380	43.0
420/70R24	130/127	A8/B	W12 W13 W14L	1900	160	1248	418	44.0
420/70R24	136/133	A8/B	W12 W13 W14L	2240	240	1248	418	44.0
420/70R28	133/130	A8/B	W12 W13 W14L	2060	160	1349	418	44.0
420/70R28	139/136	A8/B	W12 W13 W14L	2430	240	1349	418	44.0
480/70R24	138/135	A8/B	W14L W15L W16L	2360	160	1316	479	47.0
480/70R28	140/137	A8/B	W14L W15L W16L	2500	160	1421	479	47.0
480/70R28	145/142	A8/B	W14L W15L W16L	2900	240	1421	479	47.0
480/70R28	151/148	A8/B	W14L W15L W16L	3450	320	1421	479	47.0
480/70R34	143/143	A8/B	W14L W15L W16L	2725	160	1580	479	47.0
480/70R38	145/142	A8/B	W14L W15L W16L	2900	160	1681	479	47.0
520/70R38	150/150	A8/B	W15L W16L W18L	3350	160	1749	516	48.0
580/70R38	155/155	A8/B	W18L	3875	160	1827	577	50.0
580/70R38	170/167	A8/B	W18L	6000	280	1827	577	50.0



LR8000

Radial Agricultural Tire

1. Longer service life.
2. Excellent stability and comfort.
3. More efficient traction.
4. Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
800/65R32	167	D	DW25B DW27B DH27B	5450	160	1853	798	58.0
800/65R32	172	D	DW25B DW27B DH27B	6300	240	1853	798	58.0
800/65R32	178	D	DW25B DW27B DH27B	7500	320	1853	798	58.0
800/65R32	181/181	A8/B	DW25B DW27B DH27B	8250	360	1853	798	58.0

Harvesters



LR7000

Radial Agricultural Tire

- 1.Up to 10% load.
- 2.Enhance bead strength.
- 3.Longer service life.
- 4.Excellent stability and comfort.
- 5.More efficient traction.
- 6.Outstanding floating behavior reduces pressure to land.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
600/70R28	157	D	DW18L DW20B W18L	4125	240	1551	591	52.5
600/70R28	161/161	A8/B	DW18L DW20B W18L	4625	280	1551	591	52.5
600/70R30	152	D	DW18L DW20B W18L	3550	160	1602	591	52.5
600/70R30	158	D	DW18L DW20B W18L	4250	240	1602	591	52.5
650/85R38	173/176	D/A8	DW20B DW21B DW23B	6500	240	2071	645	65.0



LR861

Radial Agricultural Tire

- 1.Better traction and braking performance.
- 2.Save work time and fuel.
- 3.Better running stability.
- 4.Suitable for modern mechanical equipment.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
320/90R46(R-1)	146/143	A8/B	W9 W10 W11	3000	320	1744	319	37.0
320/90R46(R-1)	148/148	A8/B	W9 W10 W11	3150	360	1744	319	37.0
340/85R38	133/130	A8/B	W11 W12	2060	160	1543	343	42.0
380/90R46	149/149	A8/B	W11 W12 W13	3250	240	1852	380	45.0
380/90R46	157/157	A8/B	W11 W12 W13	4125	360	1852	380	45.0

Sprayers



LR9000

Radial Agricultural Tire

1. Better soil protection.
2. Exceptional load capacity.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
380/90R50	151/151	A8/B	W11 W12 W13	3450	240	1954	380	48.0
380/90R50	160/157	A8/B	W11 W12 W13	4500	400	1954	380	48.0



LBI301

Radial Agricultural Tire

1. Steel belted.
2. Wear and puncture resistance.
3. Good grip and self-cleaning performance.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
600/50R22.5	159	D	AG20.00	4375	400	1172	611	25.0
650/65R30.5	176	D	AG20.00	7100	400	1621	645	27.0
850/50R30.5	182	D	AG28.00	8500	400	1625	862	27.0

Trailers



FL300

Radial Agricultural Tire

- 1.Steel belted
- 2.Wear and puncture resistance.
- 3.Good grip and self-cleaning performance.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
500/60R22.5	155	D	AG16.00	3875	400	1172	503	18.0
560/60R22.5	165	D	AG16.00 16.00 17.00 AG20.00	5150	500	1244	543	18.0
560/45R22.5	152	D	AG16.00	3550	400	1076	543	18.0
600/55R26.5	165	D	AG20.00	5150	400	1333	611	20.0
650/55R26.5	169	D	AG20.00	5800	400	1389	645	24.0
710/50R26.5	170	D	AG20.00 AG24.00	6000	400	1383	727	24.0
710/50R30.5	173	D	AG20.00 AG24.00	6500	400	1485	727	26.0



LR451

Radial Agricultural Tire

- 1.Increase traction performance.
- 2.Enhance shoulder wear and cut resistance performance.
- 3.Enhance tread wear resistance performance.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
460/70R24 IND	152/152	A8/B	DW14L DW15L DW16L	3550	320	1254	455	32.0
460/70R24 IND	159/159	A8/B	DW14L DW15L DW16L	4375	400	1254	455	32.0
500/70R24 IND	164/164	A8/B	DW16L DW15L	5000	400	1302	511	28.0

Compact line



LR400

Radial Agricultural Tire

- 1.Increase traction performance.
- 2.Enhance shoulder wear and cut resistance performance.
- 3.Enhance tread wear resistance performance.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
500/70R24 IND	164/164	A8/B	DW16L DW15L	5000	400	1302	511	28.0
400/70R18 IND	147/147	A8/B	13.00	3075	400	1017	404	23.0
400/70R20 IND	149/149	A8/B	13.00	3250	400	1068	404	23.0




LR400

Radial Agricultural Tire

- 1.Increase traction performance.
- 2.Enhance shoulder wear and cut resistance performance.
- 3.Enhance tread wear resistance performance.

Size	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
405/70R18	141/153	B/A2	13	2575	380	1025	407	23.0
405/70R20	143/155	B/A2	13	2725	380	1076	407	23.0

Bias Agricultural Tire

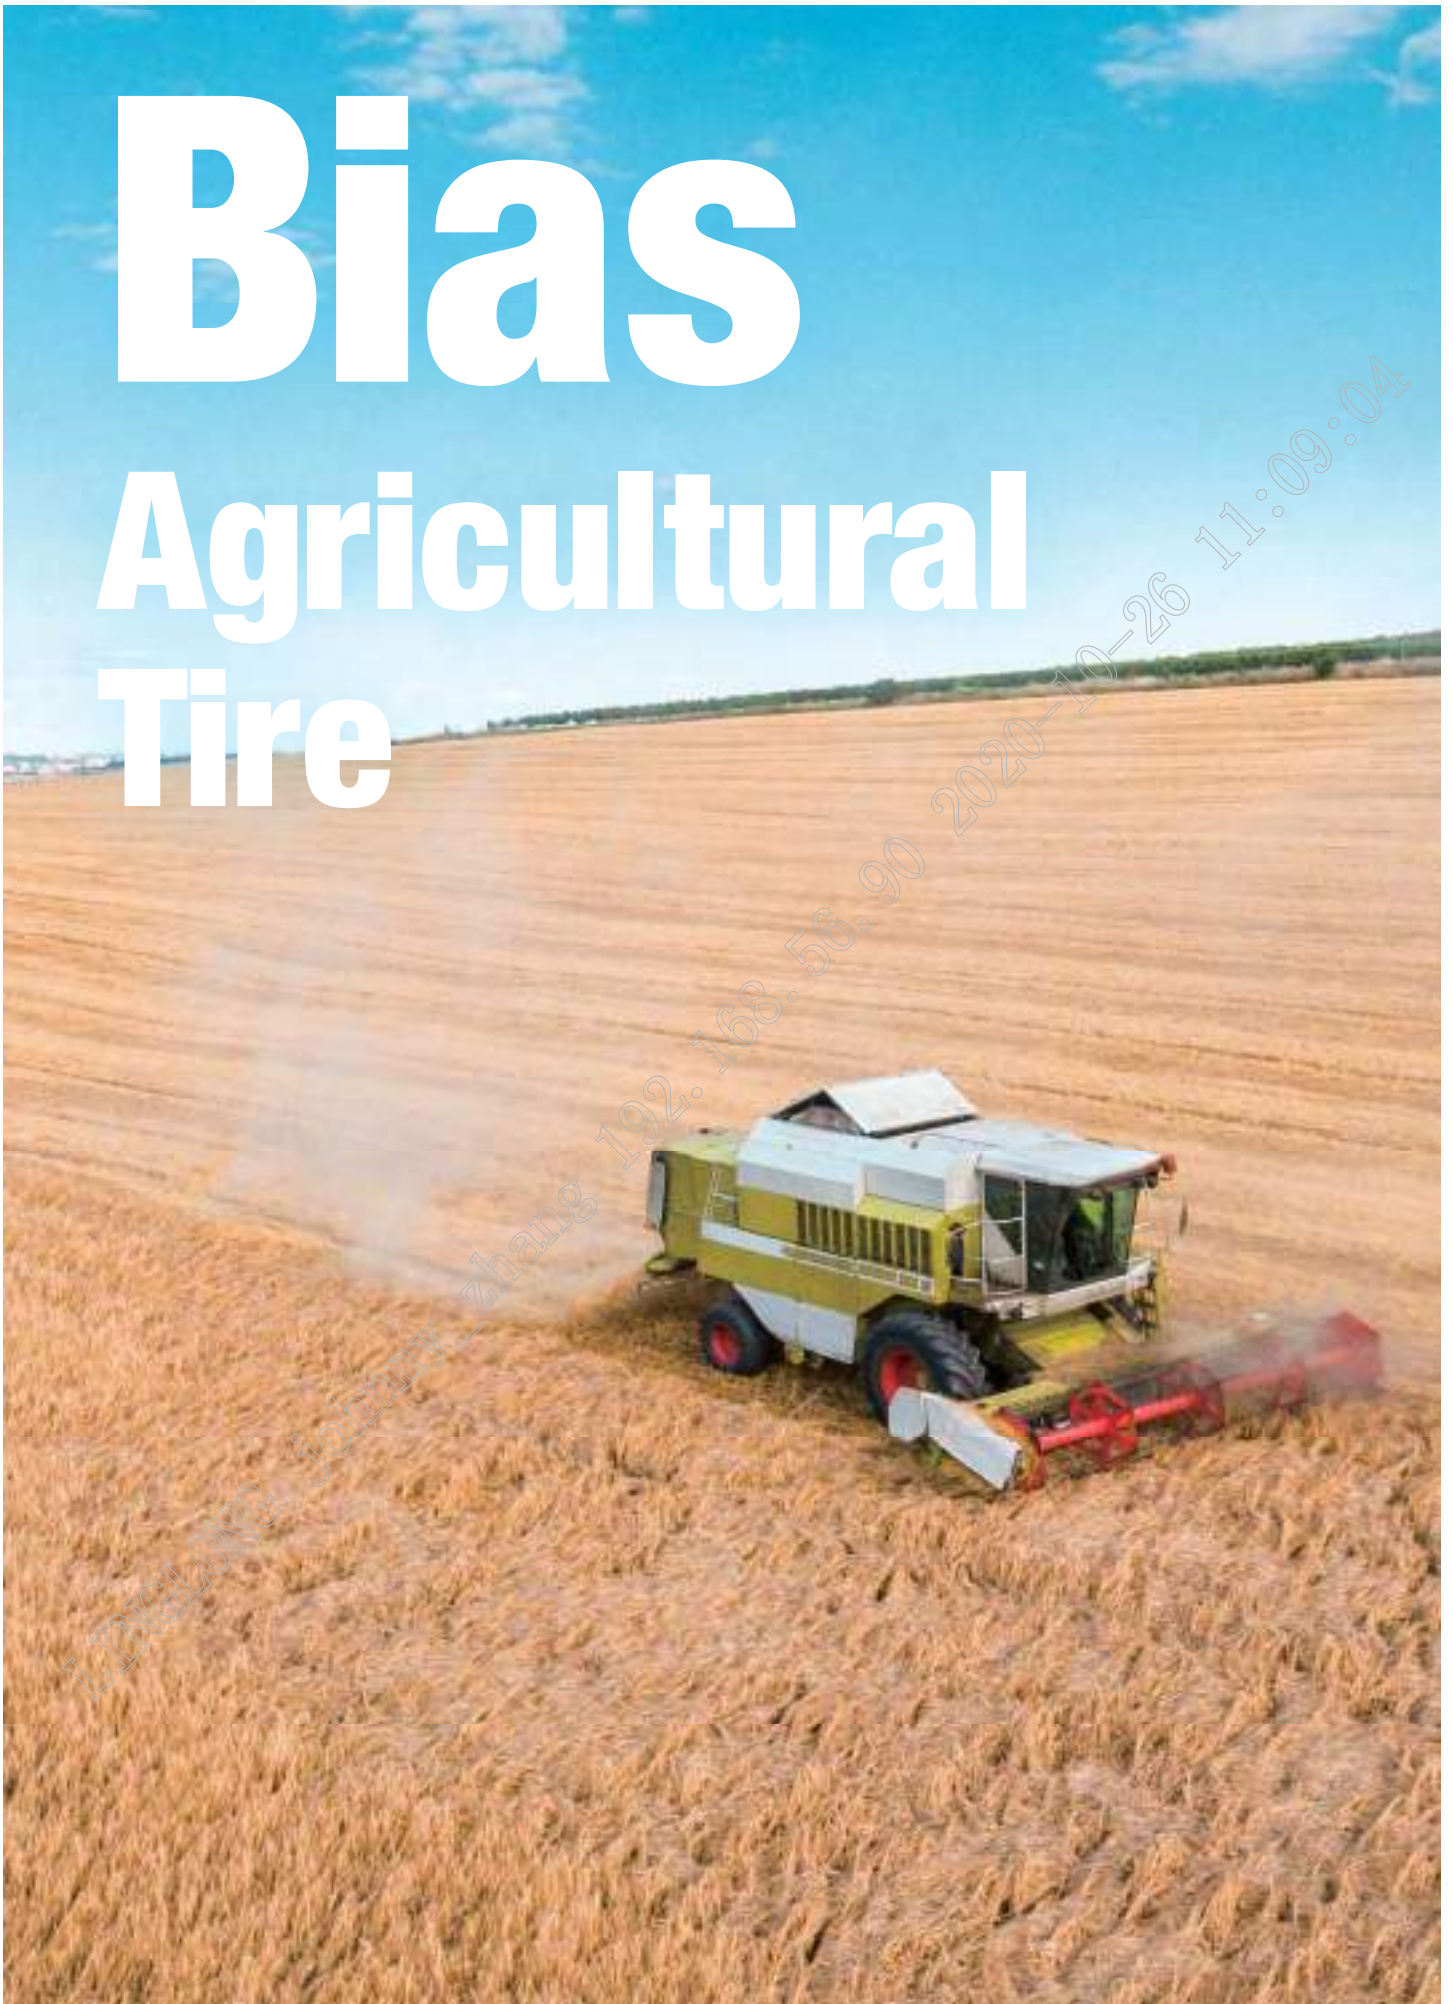

Implement Flotation/Traction



LBI301

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressura (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
600/50-22.5IMP	16	169	A6	AG20.00	5770	260	611	1172	25.0	TL

Tractor Steering Wheel



LL30

Agricultural Tire

- 1.Lateral grip and wear resistance.
- 2.Good traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
4.00-12	6	--	A6	3.00D	240	360	110	535	10.0	TT
4.00-14	4	--	A6	3.00D	270	340	110	590	10.0	TT
4.00-14	6	--	A6	3.00D	350	400	110	590	10.0	TT
4.00-16	6	--	A6	3.00D	800	400	110	640	10.0	TT
4.50-14	8	--	A6	3.00D	1000	450	120	602	10.0	TT
4.50-16	6	--	A6	3.00D	615	360	122	655	10.0	TT
4.50-16	8	--	A6	3.00D	1000	450	122	655	10.0	TT
5.00-14	8	--	A6	3.00D	500	450	130	620	12.0	TT
5.00-15	8	--	A6	4.00E	675	450	140	665	10.0	TT
6.00-16	6	--	A6	4.50E	495	250	165	745	13.0	TT
6.50-20	8	--	A6	5.00F	865	420	180	860	16.0	TT



LBF201

Agricultural Tire

- 1.Lateral grip and wear resistance.
- 2.Good traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
5.50-16	6	--	A6	4.00E	525	370	150	710	15.0	TT

Tractor Drive Wheel



LL31

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
5.00-12	4	--	A6	4.00E	280	200	145	590	22.0	TT
5.50-17	6	--	A6	4.00E	440	250	145	750	22.0	TT
6.00-12	4	--	A6	4.50E	335	180	165	640	22.0	TT
6.00-12	6	--	A6	4.50E	405	250	165	640	22.0	TT
6.00-12	8	--	A6	4.50E	420	260	165	640	22.0	TT
6.00-14	6	--	A6	4.50E	450	250	165	690	20.5	TT
6.00-14	8	--	A6	4.50E	685	420	165	690	20.5	TT
6.00-16	6	--	A6	4.50E	495	250	165	745	22.0	TT
7.50-16	6	--	A6	5.50F	650	210	205	810	23.0	TT
7.50-16	8	--	A6	5.50F	700	240	205	810	23.0	TT
7.50-20	6	--	A6	5.50F	760	210	205	910	24.0	TT
7.50-20	8	--	A6	5.50F	880	280	205	910	24.0	TT
8.3-24	6	--	A6	W7	810	240	210	995	30.0	TT
8.3-24	8	--	A6	W7	920	280	210	995	30.0	TT
8.5-20	8	--	A6	W7	880	250	210	895	30.0	TT
9.5-20	8	--	A6	W8	955	280	240	950	30.0	TT
9.5-24	6	--	A6	W8	940	210	240	1050	30.0	TT
9.5-24	8	--	A6	W8	1110	280	240	1050	30.0	TT
10-15	8	--	A6	9.00	950	310	254	775	20.0	TT
11.2-24	6	--	A6	W10	950	180	285	1105	35.0	TT
11.2-24	8	--	A6	W10	1150	250	285	1105	35.0	TT
12-38	8	--	A6	DW11	1570	140	330	1575	35.0	TT
12.4/11-28	6	--	A6	W11	1275	170	315	1260	38.0	TT
12.4/11-28	8	--	A6	W11	1510	230	315	1260	38.0	TT
14.9-24	6	--	A6	W13	1510	140	378	1265	38.0	TT
14.9-24	8	--	A6	W13	1760	180	378	1265	38.0	TT
14.9-28	6	--	A6	W13	1610	140	378	1365	38.0	TT
14.9-28	8	--	A6	W13	1880	180	378	1365	38.0	TT
16.9-34	8	--	A6	W15L	2380	170	430	1585	37.0	TT
16.9-34	10	--	A6	W15L	2605	200	430	1585	37.0	TT



LL32

Agricultural Tire
1.Wear and puncture resistance.
2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
5.50-16	10	--	A6	4.00E	1325	530	150	715	16.0	TT
6.00-16	6	--	A6	4.50E	495	250	165	745	18.0	TT
6.00-16	10	--	A6	4.50E	755	420	165	745	18.0	TT
6.50-16	10	--	A6	5.00F	635	300	180	765	18.0	TT
6.50-16	14	--	A6	5.00F	815	460	180	765	18.0	TT
7.00-16	14	--	A6	5.50F	1010	460	190	785	18.0	TT
7.50-16	10	--	A6	5.50F	800	320	205	810	20.0	TT
7.50-16	14	--	A6	5.50F	1030	460	205	810	20.0	TT



LL37

Agricultural Tire
1.Wear and puncture resistance.
2.Good grip performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
7.50-20	6	--	A6	5.50F	760	210	205	910	24.0	TT
7.50-20	8	--	A6	5.50F	880	280	205	910	24.0	TT
910x205	16	--	A6	5.50F	1900	690	205	910	24.0	TT



LL46

Agricultural Tire
1.Wear and puncture resistance.
2.Good grip and traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
15-24	10	--	A6	DW14	2800	280	410	1330	33.0	TT
16.9-28	8	--	A6	W15L	2175	170	430	1435	39.0	TT
16.9-30	8	--	A6	W15L	2245	170	430	1485	39.0	TT
16.9-30	10	--	A6	W15L	2455	200	430	1485	39.0	TT



LL76

Agricultural Tire
1.Wear and puncture resistance.
2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
23.1-26	12	--	--	DW20	3610	170	587	1605	42.0	TT



LBR102

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
14.9-28	8	--	A6	W13	1880	180	378	1365	37.0	TT



LBR105

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
9.5/10.00-28	8	--	A6	W9	1300	200	275	1245	35.0	TT



LBR103

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

NEW

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
23.1-26	10	--	A8	DW20	2900	140	587	1605	42.0	TT
23.1-26	12	--	A6	DW20	3250	170	587	1605	42.0	TT
23.1-26	14	--	A8	DW20	3550	190	587	1605	42.0	TT
23.1-30	10	--	A8	DW20	3075	140	587	1707	42.0	TT
23.1-30	12	--	A8	DW20	3450	170	587	1707	42.0	TT
23.1-30	16	--	A6	DW20	4120	230	587	1707	42.0	TT

Tractor Driving Wheel

Paddy Field



R-2

Agricultural Tire

- 1.Wear and puncture resistance.
- 2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
19.5L-24	10	--	A6	17.00	2800	170	495	1382	92.0	TT
28L-26	14	--	A6	DW25	4245	170	715	1672	100.0	TT
23.1-26	12	--	A6	DW20	3610	170	587	1662	100.0	TT



PR-1

Agricultural Tire

Special for paddy field.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
6.50-16	6	--	--	5.00F	565	250	165	830	60.0	TT
7.50-16	8	--	--	5.50F	700	240	195	890	70.0	TT
8.3-20	8	--	--	W7	760	280	210	950	75.0	TT
8.3-24	8	--	--	W7	1275	330	210	1050	75.0	TT
9.5-24	8	--	--	W8	1510	280	240	1150	80.0	TT
11.2-24	8	--	--	W10	1700	270	285	1205	85.0	TT
11/12.4-28	10	--	--	W11	2050	230	315	1293	90.0	TT
14.9-30	10	--	--	W13	2190	230	378	1550	90.0	TT
11-32	8	--	--	W10	1260	210	305	1460	85.0	TT
16.9-34	10	--	--	W15L	2605	200	430	1685	90.0	TT

Implement



LL2

Agricultural Tire
1.Wear and crack resistance.
2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
4.00-8	4	--	--	3.00D	180	340	110	425	6.5	TT
4.00-8	6	--	--	3.00D	410	420	110	425	6.5	TT
4.00-8	8	--	--	3.00D	700	530	110	425	6.5	TT
4.00-12	6	--	--	3.00D	240	360	112	535	7.5	TT
4.00-14	6	--	--	3.00D	350	400	112	590	8.0	TT
7.00-16	10	--	--	5.50F	1100	530	188	760	12.0	TT
7.00-16	12	--	--	5.50F	1220	630	188	760	12.0	TT
7.00-16	14	--	--	5.50F	1320	730	188	760	12.0	TT



LL11

Agricultural Tire
1.Low rolling resistance.
2.Good wear and crack resistance.
3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
6.50-16	10	--	--	5.50F	975	530	185	750	10.0	TT
6.50-16	12	--	--	5.50F	1060	630	185	750	10.0	TT
7.00-16	10	--	--	5.50F	1100	530	188	760	12.0	TT
7.00-16	12	--	--	5.50F	1220	630	188	760	12.0	TT
7.00-16	14	--	--	5.50F	1320	730	188	760	12.0	TT



LL14

Agricultural Tire

- 1.Wear resistance and lateral grip.
- 2.Multiple functions.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
5.00-16	8	--	--	3.00D	1200	600	130	655	8.0	TT
5.00-16	10	--	--	3.00D	1350	650	130	655	8.0	TT
5.50-16	8	--	--	4.00E	1100	470	150	685	8.0	TT
6.50-16	10	--	--	5.50F	975	530	185	750	10.5	TT
6.50-16	12	--	--	5.50F	1060	630	185	750	10.5	TT



LL15

Agricultural Tire

- 1.Wear and crack resistance.
- 2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
4.00-16	6	--	--	3.00D	800	400	110	640	8.0	TT
6.00-16	6	--	--	4.50E	635	320	170	730	9.0	TT
6.00-16	8	--	--	4.50E	735	420	170	730	9.0	TT
6.00-16	10	--	--	4.50E	860	530	170	730	9.0	TT
6.50-16	10	--	--	5.50F	975	530	185	750	10.0	TT
6.50-16	12	--	--	5.50F	1060	630	185	750	10.0	TT
7.50-16	14	--	--	6.00G	1500	730	215	805	13.0	TT



LL17

Agricultural Tire

- 1.Low rolling resistance.
- 2.Wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
4.50-14	8	--	--	3.00D	1000	450	120	602	8.0	TT



LL19

Agricultural Tire

- 1.Low noise.
- 2.Fuel saving.
- 3.Good wear resistance.
- 4.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
5.50-14	8	--	--	3.00D	595	390	158	635	9.0	TT



LL21

Agricultural Tire

- 1.Low rolling resistance.
- 2.Wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
4.50-12	8	--	--	3.00B	415	400	127	545	7.0	TT



LL27

Agricultural Tire
Multiple functions.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
4.50-14	8	--	--	3.00D	1000	450	120	602	8.0	TT
5.50-16	8	--	--	4.00E	1100	470	150	685	8.0	TT
5.50-16	10	--	--	4.00E	1325	530	150	685	8.0	TT



LL29

Agricultural Tire
1.Wear resistance and lateral grip.
2.Multiple functions.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
4.50-16	6	--	--	3.00D	615	360	122	655	8.0	TT
4.50-16	8	--	--	3.00D	1000	450	122	655	8.0	TT
4.50-16	10	--	--	3.00D	1325	530	122	655	8.0	TT
5.00-14	8	--	--	3.00D	1200	530	130	620	8.0	TT



LL38

Agricultural Tire
1.Wear and puncture resistance.
2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
4.50-16	6	--	--	3.00D	615	360	122	655	8.0	TT
4.50-16	8	--	--	3.00D	1000	450	122	655	8.0	TT
4.50-16	10	--	--	3.00D	1325	530	122	655	8.0	TT
5.00-16	8	--	--	4.00E	1200	600	135	680	8.0	TT
5.00-16	10	--	--	4.00E	1350	650	135	680	8.0	TT
5.50-16	8	--	--	4.00E	1100	470	150	685	8.0	TT
5.50-16	10	--	--	4.00E	1325	530	150	685	8.0	TT



LL82

Agricultural Tire
1.Wear and puncture resistance.
2.Good grip and traction performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
4.00-8	6	--	--	3.00D	410	420	110	425	6.5	TT
4.00-8	8	--	--	3.00D	700	530	110	425	6.5	TT



Implement Steering/Support



LL40

Agricultural Tire
1.Wear and puncture resistance.
2.Good traction.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
10-15	8	--	--	9.00	1240	300	300	775	10.0	TT

Industry Tractor



LBR401

Agricultural Tire
1.Wear and puncture resistance.
2.Good grip and self-cleaning performance.

NEW

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
8.25-16	12	--	A6	6.50H	D 1360 S 1550	530	235	855	22.0	TT





LL101

Agricultural Tire
1.Wear and puncture resistance.
2.Good grip and self-cleaning performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kpa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type TT/TL
16.9-28	12	--	A8	W15L	3450	260	429	1410	28.0	TL
19.5L-24	12	--	A6	DW16	3450	230	495	1340	30.0	TL





LINGLONG_johnny_zhang 192.168.56.90 2020-10-26 11:09:22

SPECIALTY TIRE

Industrial
Tire



Industrial



NEW

LF401

Industrial Tire

- 1.Wear resistance compound,High wear resistance performance.
Increase tyre life.
- 2.Deep pattern design and wide tread arc,Enhance self-cleaning performance.
- 3.Variational pattern design,Novel appearance.
- 4.New stamping design.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
18X7-8NHS	16	--	--	4.33R	1695	1000	173	465	18.0	TT
5.00-8NHS	10	--	--	3.50D	1150	1000	137	470	15.0	TT
6.00-9NHS	10	--	--	4.00E	1505	860	160	540	15.0	TT
6.50-10NHS	10	--	--	5.00F	1655	790	175	590	16.0	TT
7.00-12NHS	12	--	--	5.00S	2375	860	190	676	21.0	TT
28X9-15NHS (8.15-15)	14	--	--	7.0	3050	970	220	710	18.0	TT
8.25-15NHS	14	--	--	6.5	3775	830	235	840	23.0	TT
250-15NHS	18	--	--	7.5	4110	1030	250	735	23.5	TT
300-15NHS	18	--	--	8.0	5530	830	300	840	23.5	TT
7.50-16NHS	12	--	--	6.00G	3195	790	215	805	22.0	TT
9.00-20NHS	16	--	--	7.0	5195	760	259	1018	25.0	TT



LL39

Industrial Tire

- 1.Good wear and crack resistance.
- 2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
18x7-8NHS	16	--	--	4.33R	1640	1000	173	465	16.0	TT
6.50-10NHS	10	--	--	5.00F	1655	790	175	590	15.0	TT
6.50-10NHS	14	--	--	5.00F	1975	1070	175	590	15.0	TT
7.00-15NHS	12	--	--	5.50S	2900	850	194	735	20.0	TT
28X9-15NHS 8.15-15NHS	12	--	--	7.0	3230	840	215	704	16.0	TT
28x9-15NHS	14	--	--	7.0	3050	970	220	710	13.0	TT



LL45

Industrial Tire

1. Good wear and side slip resistance.
2. Stable performance.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
5.00-8NHS	6	--	--	3.50D	850	600	137	470	12.0	TT
5.00-8NHS	10	--	--	3.50D	1150	1000	137	470	12.0	TT
6.00-9NHS	10	--	--	4.00E	1505	860	160	540	10.0	TT
6.50-10NHS	10	--	--	5.00F	1655	790	175	590	15.0	TT
7.00-9NHS	10	--	--	5.00S	1995	860	190	590	12.0	TT
7.00-12NHS	12	--	--	5.00S	2375	860	190	676	12.0	TT
7.50-15NHS	14	--	--	6.0	3375	925	215	780	18.0	TT
8.25-12NHS	12	--	--	6.5	3060	720	235	765	12.0	TT
8.25-15NHS	14	--	--	6.5	3775	830	235	840	15.0	TT
8.25-15NHS	18	--	--	6.5	4240	1000	235	840	15.0	TT
9.00-16NHS	14	--	--	6.50H	4495	760	255	890	16.0	TT



LL65

Industrial Tire

1. Wear and crack resistance.
2. Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
10.00-15NHS	14	--	--	7.5	2800	750	280	935	12.0	TT



LL102

Industrial Tire

- 1.Wear and crack resistance.
- 2.Low rolling resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
10-16.5NHS	10	--	--	8.25	2135	520	264	773	13.0	TL
10-16.5NHS	12	--	--	8.25	2375	620	264	773	13.0	TL
12-16.5NHS	12	--	--	9.75	2865	550	307	831	13.0	TL



LL103

Industrial Tire

- 1.Wear and crack resistance.
- 2.Low rolling resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
12-16.5LT	10	--	--	9.75	D1418 S1614	420	307	831	13.0	TL
12-16.5LT	12	--	--	9.75	D1650 S1850	520	307	831	13.0	TL



LL2

Industrial Tire

- 1.Good wear and crack resistance.
- 2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)	Type
9.00-16NHS	14	--	--	6.50H	4080	750	255	890	12.5	TT
9.00-16NHS	14	--	--	6.50H	2635	750	255	890	12.5	TT

LINGLONG johnny_zhang 192.168.56.90 2020/10/26 11:09:27



SPECIALTY TIRE

—
Bias Tire



Passenger Car



LL19

Bias Passenger Car Tire

1.Wear and crack resistance.
2.Low rolling resistance.
3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
5.60-13	4	70	K	4J	330	170	145	600	6.0
5.60-13	6	74	K	4J	370	210	145	600	6.0



LL117

Temporary-use Spare Tire

1.Low rolling resistance.
2.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
T155/90D16	--	110	M	4T	1060	420	152	686	3.8

Mini Truck



LL20

Bias Mini Truck Tire

- 1.Low rolling resistance.
- 2.Good wear and crack resistance.
- 3.Good heat dissipation.
- 4.Low noise.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
5.00-10ULT	8	79/77	K	3.50B	D412 S437	400	143	517	8.0
5.00-12ULT	6	78/76	K	3.50B	D400 S425	300	143	568	8.0
5.00-12ULT	8	83/81	K	3.50B	D462 S487	400	143	568	8.0
5.00-12ULT	10	88/86	K	3.50B	D530 S560	500	143	568	8.0



LL21

Bias Mini Truck Tire

- 1.Good wear and crack resistance.
- 2.Low rolling resistance.
- 3.Good heat dissipation.
- 4.Low noise.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
4.50-12ULT	8	77/76	K	3.00B	D400 S412	400	127	545	7.0

Light Truck



LL9

Bias Light Truck Tire

- 1.Low noise.
- 2.Low rolling resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.00-15LT	8	97/92	K	4.50E	D630 S730	420	170	705	9.0
6.00-15LT	10	101/97	K/L	4.50E	D730 S825	530	170	705	9.0
6.50-15LT	8	101/97	K/L	4.50E	D730 S825	420	180	730	9.0
6.50-15LT	10	106/101	K/L	4.50E	D825 S950	530	180	730	9.0
7.50-15LT	10	115/110	K	6.00G	D1060 S1215	530	215	780	11.0
7.50-15LT	12	119/115	K/L	6.00G	D1215 S1360	630	215	780	11.0
7.50-16LT	10	116/112	K/L	6.00G	D1120 S1250	530	215	805	11.5
7.50-16LT	12	120/116	K/L	6.00G	D1250 S1400	630	215	805	11.5
7.50-16LT	14	122/118	K/L	6.00G	D1320 S1500	730	215	805	11.5
7.50-16LT	16	126/123	K	6.00G	D1520 S1700	850	215	805	11.5





LL11

Bias Light Truck Tire

- 1.Low noise and fuel saving.
- 2.Good wear resistance and heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.50-16LT	8	102/98	K	5.50F	D750 S850	420	185	750	10.0
6.50-16LT	10	107/103	K/L	5.50F	D875 S975	530	185	750	10.0
6.50-16LT	12	110/105	K/L	5.50F	D925 S1060	630	185	750	10.0
7.00-15LT	10	109/105	K/L	5.50F	D925 S1030	530	200	750	10.0
7.00-15LT	12	113/109	K	5.50F	D1030 S1150	630	200	750	10.0
7.00-16LT	8	107/102	K	5.50F	D850 S975	420	200	775	12.0
7.00-16LT	10	111/106	K	5.50F	D950 S1090	530	200	775	12.0
7.00-16LT	12	115/110	K/L	5.50F	D1060 S1215	630	200	775	12.0
7.00-16LT	14	118/114	K	5.50F	D1180 S1320	730	200	775	12.0





LL15

Bias Light Truck Tire

Good wear and crack resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.00-13LT	6	88/83	K	4.50B	D487 S560	320	170	655	9.0
6.00-13LT	8	93/89	K	4.50B	D580 S650	420	170	655	9.0
6.00-14LT	8	95/90	K	4 1/2J	D600 S690	420	170	680	9.0
6.00-14LT	10	99/95	K	4 1/2J	D710 S800	530	170	680	9.0
6.00-15LT	8	97/92	K	4.50E	D630 S730	420	170	705	9.0
6.00-15LT	10	101/97	K	4.50E	D730 S825	530	170	705	9.0
6.50-14LT	8	99/95	K	4 1/2J	D690 S775	420	180	705	9.0
6.50-14LT	10	104/100	K	4 1/2J	D800 S900	530	180	705	9.0
6.50-15LT	8	101/97	K	4.50E	D730 S825	420	180	730	9.0
6.50-15LT	10	106/101	K/L	4.50E	D825 S950	530	180	730	9.0
6.50-16LT	10	107/103	K/L	5.50F	D875 S975	530	185	750	10.0
6.50-16LT	12	110/105	K	5.50F	D925 S1060	630	185	750	10.0
7.50-16LT	10	116/112	K/L	6.00G	D1120 S1250	530	215	805	13.0
7.50-16LT	12	120/116	K	6.00G	D1250 S1400	630	215	805	13.0
7.50-16LT	14	122/118	K	6.00G	D1320 S1500	730	215	805	13.0
7.50-16LT	16	126/123	K	6.00G	D1520 S1700	850	215	805	13.0
8.25-16LT	14	126/122	K	6.50H	D1500 S1700	630	235	855	14.5
8.25-16LT	16	128/124	K	6.50H	D1600 S1800	730	235	855	14.5



LL16

Bias Light Truck Tire

1. Good wear and crack resistance.
2. Low rolling resistance.
3. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.50-14LT	8	99/92	K/L	4 1/2J	D690 S775	420	180	705	9.0
6.50-14LT	10	104/100	K/L	4 1/2J	D800 S900	530	180	705	9.0



LL17

Bias Light Truck Tire

1. Good wear and crack resistance.
2. Low rolling resistance.
3. Good heat dissipation.
4. Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.00-14LT	8	95/90	K	4 1/2J	D600 S690	420	170	680	9.0
6.00-14LT	10	100/96	K	4 1/2J	D710 S800	530	170	680	9.0



LL18

Bias Light Truck Tire

- 1.Good wear and crack resistance.
- 2.Fuel saving.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.00-13LT	6	88/83	K	4.50B	D487 S560	320	170	655	9.0
6.00-13LT	8	93/89	K	4.50B	D580 S650	420	170	655	9.0



LL62

Bias Light Truck Tire

- 1.Wear and crack resistance.
- 2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.50-16LT	14	122/118	K	6.00G	D1320 S1500	730	215	816	16.0
7.50-16LT	16	126/123	K	6.00G	D1520 S1700	850	215	816	16.0



LL201

Bias Light Truck Tire

1. Good wear resistance.
2. Good heat dissipation.
3. Low noise.
4. Fuel saving.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.50-16LT	10	107/103	K	5.50F	D875 S975	530	185	750	10.0
7.00-16LT	12	115/110	K	5.50F	D1060 S1215	630	200	775	12.0
7.50-16LT	8	112/107	L	6.00G	D975 S1120	410	215	816	12.0
7.50-16LT	10	116/112	K/L	6.00G	D1120 S1250	520	215	816	12.0



LL19

Bias Light Truck Tire

1. Good wear resistance.
2. Good heat dissipation.
3. Low noise.
4. Fuel saving.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
5.50-13LT	8	88/84	K	4.00B	D500 S560	420	160	620	9.0



LL89

Bias Light Truck Tire

- 1.Wear and crack resistance.
- 2.Lateral grip.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.50-16LT	14	122/118	K	6.00G	D1320 S1500	730	215	816	15.5
7.50-16LT	16	124/120	K	6.00G	D1520 S1700	758	215	816	15.5
8.25-16LT	16	128/124	K	6.50H	D1600 S1800	730	235	867	18.5



MG-99

Bias Light Truck Tire

- 1.Good wear resistance.
- 2.Good heat dissipation.
- 3.Low noise.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.50-16LT	16	126/123	K	6.00G	D1520 S1700	850	215	816	18.0

Truck&Bus



LL1

Bias Truck/Bus Tire

- 1.Low rolling resistance.
- 2.Good Wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
12.00-24	16	156/152	G	8.5	D3550 S4000	670 740	315	1225	15.0
12.00-24	18	158/154	G	8.5	D3750 S4250	740 810	315	1225	15.0



LL2

Bias Truck/Bus Tire

- 1.Low rolling resistance.
- 2.Good Wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max. Load(kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.00-16LT	10	111/106	K	5.50F	D950 S1090	530	200	775	12.0
7.00-16LT	12	115/110	K	5.50F	D1060 S1215	630	200	775	12.0
7.00-16LT	14	118/114	K	5.50F	D1180 S1320	730	200	775	12.0
9.00-20	12	138/133	G	7.0	D2060 S2360	600 670	259	1018	15.0
9.00-20	14	141/137	G/K	7.0	D2300 S2575	700 770	259	1018	15.0
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1018	15.0
10.00-20	16	146/142	G	7.5	D2650 S3000	740 810	278	1055	15.0
10.00-20	18	150/145	G	7.5	D2900 S3350	840 910	278	1055	15.0
12.00-20	16	152/148	G	8.5	D3150 S3550	670 740	315	1125	15.0
12.00-20	18	154/150	G	8.5	D3350 S3750	740 810	315	1125	15.0



LL3

Bias Truck/Bus Tire

- 1.Wear and crack resistance.
- 2.Lateral grip.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
8.25-20	10	129/124	G	6.5	D1600 S1850	530 600	236	974	15.0
8.25-20	14	136/131	G	6.5	D1950 S2240	740 810	236	974	15.0



LL4

Bias Truck/Bus Tire

Good Wear and crack resistance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
9.00-20	12	138/133	G	7.0	D2060 S2360	600 670	259	1018	15.0
9.00-20	14	141/137	G/K	7.0	D2300 S2575	700 770	259	1018	15.0
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1018	15.0
11.00-20	16	150/145	G	8.0	D2900 S3350	740 810	293	1085	16.0
11.00-20	18	153/148	G	8.0	D3150 S3650	840 910	293	1085	16.0



LL8

Bias Truck/Bus Tire

1. Good Wear and crack resistance.
2. High traction.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.00-15LT	10	109/105	K	5.50F	D925 S1030	530	200	750	10.0
7.00-15LT	12	113/109	K	5.50F	D1030 S1150	630	200	750	10.0
7.50-15LT	12	119/115	K	6.00G	D1215 S1360	630	215	780	11.0
7.00-20	10	121/117	G	5.5	D1285 S1450	560 630	200	904	12.0
7.00-20	12	124/120	G	5.5	D1400 S1600	670 740	200	904	12.0



LL48

Bias Truck/Bus Tire

1. Fuel saving.
2. Low noise.
3. Wear resistance.
4. Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
9.00-20	12	138/133	G	7.0	D2060 S2360	600 670	259	1018	13.5
9.00-20	14	141/137	G	7.0	D2300 S2575	700 770	259	1018	13.5
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1018	13.5



LL47

Bias Truck/Bus Tire

- 1.Wear and crack resistance.
- 2.Low rolling resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.00-20	10	121/117	G	5.5	D1285 S1450	560 630	200	904	12.0
7.00-20	12	124/120	G	5.5	D1400 S1600	670 740	200	904	12.0
7.00-20	14	127/123	G	5.5	D1550 S1750	770 840	200	904	12.0
8.25-20	14	136/131	G/K	6.5	D1950 S2240	740 810	236	974	14.0
8.25-16LT	14	126/122	K/L	6.50H	D1500 S1700	630	235	855	12.5
8.25-16LT	16	128/124	K/L	6.50H	D1600 S1800	730	235	855	12.5
9.00-20	14	141/137	G/K	7.0	D2300 S2575	700 770	259	1018	15.0
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1018	15.0
10.00-20	16	146/142	G	7.5	D2650 S3000	740 810	278	1055	15.0
10.00-20	18	150/145	G	7.5	D2900 S3350	840 910	278	1055	15.0
11.00-20	16	150/145	G	8.0	D2900 S3350	740 810	293	1085	15.0
11.00-20	18	153/148	G	8.0	D3150 S3650	840 910	293	1085	15.0
12.00-20	16	152/148	G	8.5	D3150 S3550	670 740	315	1125	15.0
12.00-20	18	154/150	G	8.5	D3350 S3750	740 810	315	1125	15.0



LL59

Bias Truck/Bus Tire

- 1.Available for heavy load.
- 2.Good wear resistance.
- 3.Stable performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.50-16LT	14	122/118	K	6.00G	D1320 S1500	730	215	805	12.0
7.50-16LT	16	126/123	K	6.00G	D1520 S1700	850	215	805	12.0
8.25-16LT	14	126/122	K	6.50H	D1500 S1700	630	235	835	14.5
8.25-16LT	16	128/124	K	6.50H	D1600 S1800	730	235	835	14.5
9.00-20	14	141/137	G	7.0	D2300 S2575	700 770	259	1018	14.0
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1018	14.0
10.00-20	16	146/142	G	7.5	D2650 S3000	740 810	278	1055	14.0
10.00-20	18	150/145	G	7.5	D2900 S3350	840 910	278	1055	14.0
11.00-20	16	150/145	G	8.0	D2900 S3350	740 810	293	1085	15.0
11.00-20	18	153/148	G	8.0	D3150 S3650	840 910	293	1085	15.0
12.00-20	16	152/148	G	8.5	D3150 S3550	670 740	315	1125	15.0
12.00-20	18	154/150	G	8.5	D3350 S3750	740 810	315	1125	15.0
12.00-20	20	156/151	G	8.5	D3450 S4000	810 880	315	1125	15.0
14.00-20	18	161/156	E	10.0	D4000 S4625	600 670	375	1240	20.0
14.00-20	20	164/159	E	10.0	D4375 S5000	700 770	375	1240	20.0



LL96-T

Bias Truck/Bus Tire

- 1.Low rolling resistance.
- 2.Good Wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
7.00-16LT	14	118/114	G	5.50F	D1180 S1320	730	200	785	20.0
7.50-16LT	14	122/118	G	6.00G	D1320 S1500	730	215	816	22.0
7.50-16LT	16	126/123	G	6.00G	D1520 S1700	850	215	816	22.0
8.25-16LT	14	126/122	G	6.50H	D1500 S1700	630	235	867	22.0
8.25-16LT	16	128/124	G	6.50H	D1600 S1800	730	235	867	22.0
8.25-20	14	136/131	C	6.5	D1950 S2240	740 810	236	992	19.0
9.00-20	16	145/140	B	7.0	D2500 S2900	810 880	259	1038	22.0
11.00-20	18	153/148	C	8.0	D3150 S3650	840 910	293	1105	27.0
12.00-20	18	154/150	C	8.5	D3350 S3750	740 810	315	1145	27.0
1300-20	18	158/154	B	9.0	D3750 S4250	700 770	340	1200	24.0



SL96-T

Bias Truck/Bus Tire

- 1.Low rolling resistance.
- 2.Good Wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
10.00-20	18	150/145	C	7.5	D2900 S3350	840 910	278	1073	27.0



LL147

Bias Truck/Bus Tire

- 1.Low rolling resistance.
- 2.Good Wear and crack resistance.
- 3.Good heat dissipation.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
10.00-20	18	150/145	G	7.5	D2900 S3350	840 910	278	1073	17.0



LL159

Bias Truck/Bus Tire

- 1.Available for heavy load.
- 2.Good wear resistance.
- 3.Stable performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.50-16LT	10	107/103	K	5.50F	D875 S975	530	185	750	10.0
7.50-16LT	12	120/116	K	6.00G	D1250 S1400	630	215	805	12.0
7.50-20	14	130/126	G	6.0	D1700 S1900	740 810	215	935	12.0
8.25-16LT	14	126/122	K	6.50H	D1500 S1700	630	235	855	13.5
8.25-20	14	136/131	G	6.5	D1950 S2240	740 810	236	974	13.5
10.00-20	16	146/142	G	7.5	D2650 S3000	740 810	278	1055	14.5
11.00-20	18	153/148	G	8.0	D3150 S3650	840 910	293	1085	15.0
12.00-20	18	154/150	G	8.5	D3350 S3750	740 810	315	1125	15.0



LL168

Bias Truck/Bus Tire

- 1.Available for heavy load.
- 2.Good wear resistance.
- 3.Stable performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.50-16LT	10	107/103	K	5.50F	D875 S975	530	185	750	10.0
7.00-16LT	12	115/110	K/L	5.50F	D1060 S1215	630	200	775	11.5
7.50-16LT	12	120/116	K	6.00G	D1250 S1400	630	215	805	11.5
7.50-20	14	130/126	G K	6.0	D1700 S1900	740 810	215	935	11.5
8.25-16LT	14	126/122	K/L	6.50H	D1500 S1700	630	235	855	12.0
8.25-16LT	16	128/124	K/L	6.50H	D1600 S1800	730	235	855	12.0
8.25-20	14	136/131	G K	6.5	D1950 S2240	740 810	236	974	14.0
9.00-20	14	141/137	G K	7.0	D2300 S2575	700 770	259	1018	14.0
9.00-20	16	145/140	G	7.0	D2500 S2900	810 880	259	1018	14.0
10.00-20	16	146/142	G	7.5	D2650 S3000	740 810	278	1055	14.0
11.00-20	16	150/145	G	8.0	D2900 S3350	740 810	293	1085	15.0
11.00-20	18	153/148	G	8.0	D3150 S3650	840 910	293	1085	15.0
12.00-20	18	154/150	G	8.5	D3350 S3750	740 810	315	1125	15.0



LL178

Bias Truck/Bus Tire

- 1.Available for heavy load.
- 2.Good wear resistance.
- 3.Stable performance.

Size	Ply Rating	Load Index	Speed Symbols	Rim	Max.Load (kg)	Inflated Pressure (kPa)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)
6.50-16LT	10	107/103	K	5.50F	D875 S975	530	185	750	10.0
7.00-16LT	12	115/110	K/L	5.50F	D1060 S1215	630	200	775	11.5
7.50-16LT	12	120/116	K	6.00G	D1250 S1400	630	215	805	11.5
7.50-20	14	130/126	G	6.0	D1700 S1900	740 810	215	935	11.5
8.25-16LT	14	126/122	K	6.50H	D1500 S1700	630	235	855	12.0
8.25-20	14	136/131	G	6.5	D1950 S2240	740 810	236	974	13.0

LEAO TIRE

