

CATALOG



Tires | Lubricants | Batteries | Tools and supplies | Car care products
Equipment | Brake pads | Filters | Car accessories | Wiper blades

DELIVUM

Since 1960

81 88 81 81
05 40 00 08
CUSTOMER SERVICE:
81 81 81 11
SECTOR 32 - STREET 49
CHOUEIFAT - LEBANON
INFO@SAKA.COM.LB
WWW.SAKA.COM.LB


DRIVE YOUR SOUL




This is our new
thought.
With DeliTires
you will be able
to drive your
soul and all
your feeling
will be on the
ground, for an
efficient and
safe travel.
Be yourself,
get your goal
and track your
path.

DELIUM
ROAD SYMBIOSIS

Index




INTRO 04




TOURING 07




ULTRA-HIGH
& HIGH 17
PERFORMANCE




RALLY 21




HIGH-WAY
TERRAIN 24



ALL TERRAIN 28



MUD TERRAIN 33



COMMERCIAL 39

Our certifications

An alphanumerical code indicates the type and the complete data specification. This code is universal and permits you to choose the tire that best suited to your needs.



USE >



RACING



TOURING



CITY



OFF-ROAD



HIGH SPEED



RALLY

PLUS >



RAIN & WET



WEAR LIFE



COMFORT



HANDLING



DURABILITY

ECO >



LOW NOISE



SAVE FUEL

ROAD SYMB- BIOSIS



Our Symbiosis with the Road comes from over 50 years of experience in rubber manufacturing. Following the human evolution process we provided shoes in the very beginning, then moving on and creating bicycle tires and tubes. Deli Tires manufactures a wide range of the tire products, from wheelbarrows tires to high performance car tires.

That's why we are the human motion technology experts. To seek the perfect journey you only need the perfect companion. You choose the destination, we take care of how to get you there. Safe and quickly. No matter which path you choose or the conditions you face, we will always be there, supporting you.

DELIUM
ROAD SYMBIOSIS

How to read sidewall Info

An alphanumerical code indicates the type and the complete data specification. This code is universal and permits you to choose the tire that best suited to your needs.

Passenger Cars

EUROPEAN METRIC DESIGNATION

185 /70 R 14 88 H

CROSS-SECTION WIDTH (mm)	RATIO OF CROSS-SECTION HEIGHT TO WIDTH (%)	RADIAL CONSTRUCTION	RIM DIAMETER (INCH)	LOAD INDEX	SPEED SYMBOL
--------------------------	--	---------------------	---------------------	------------	--------------

Passenger Cars

P - METRIC DESIGNATION

P 205 /65 R 15 94 H

PASSENGER CAR TIRE	CROSS-SECTION WIDTH (mm)	RATIO OF CROSS-SECTION HEIGHT TO WIDTH (%)	RADIAL CONSTRUCTION	RIM DIAMETER (INCH)	LOAD INDEX	SPEED SYMBOL
--------------------	--------------------------	--	---------------------	---------------------	------------	--------------

Light Trucks

LT METRIC DESIGNATION

LT 265 /75 R 16 112/119 Q

LIGHT TRUCK TIRE	CROSS-SECTION WIDTH (mm)	RATIO OF CROSS-SECTION HEIGHT TO WIDTH (%)	RADIAL CONSTRUCTION	RIM DIAMETER (INCH)	LOAD INDEX	SPEED SYMBOL
------------------	--------------------------	--	---------------------	---------------------	------------	--------------

Light Trucks

FLOTATION DESIGNATION

31 X 10.50 R 15 LT 109 Q

OVERALL DIAMETER (inch)	NOMINAL CROSS-SECTION WIDTH (INCH)	RADIAL CONSTRUCTION	RIM DIAMETER (INCH)	LIGHT TRUCK TIRE	LOAD INDEX	SPEED SYMBOL
-------------------------	------------------------------------	---------------------	---------------------	------------------	------------	--------------

DIRECTIONAL UNIDIRECTIONAL




The Unidirectional tire main feature is the "arrow" shaped pattern. All grooves point in the same direction, increasing water dispersion braking performance. For high-speed performance.

NON-DIRECTIONAL SYMMETRICAL



"Wave like" patterns with continuous rib design allow this tire to reduce the noise and to provide water dispersion, taking advantage from the lateral grooves.

ASYMMETRICAL

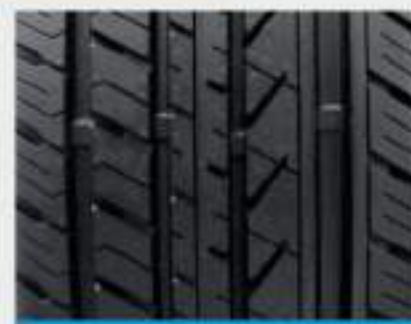

High performance tires. Asymmetrical pattern ensure handling capabilities on both wet and dry roads.

JUST TOU RING

You never know what lies around the next corner. Which is why our Touring tires makes sure you're ready for anything.

DELIVUM
ROAD SYMBIOSIS

DIRECTIONAL

IA-151



Velocità UHP

Superb handling for this long lasting compound, developed to meet those who want to balance the demands of every day life with a sporty driving style.

VELOCITÀ UHP

Superb handling for this long lasting compound, developed to meet those who want to balance the demands of every day life with a sporty driving style.

UNIDIRECTIONAL

IA-151

USE



RACING

PLUS



WEAR LIFE



HANDLING



SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
165/70R13	79S	5,0	562	169	7,5	437	965	2,5	36
175/70R13	82H	5,0	576	179	7,5	475	1045	2,5	36
185/70R13	86H	5,5	590	187	7,8	530	1170	2,5	36
185/65R14	86H	5,5	595	191	7,8	530	1170	2,5	36
215/45ZR17	91W	7,0	624	215	7,8	615	1355	3,0	44
225/40ZR18	92W	8,0	635	235	7,8	630	1390	3,0	44

EVOLUTION XTR

Sporting soul for a product which aims to achieve high performance durability without sacrificing the pleasure of comfort and safe driving.

NON
DIRECTIONAL

IA-105



USE



CITY

PLUS



COMFORT



WEAR LIFE

ECO



LOW NOISE



SAVE FUEL

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
165/80R13	83S	4,5	596	173	8,0	487	1075	2,4	35
175/70R13	82S	5,0	576	180	8,0	475	1045	2,5	36
185/70R14	88S	5,5	618	193	8,0	560	1235	2,5	36
185/65R15	88S	5,5	627	187	8,0	560	1235	2,5	36
195/65R15	91S	6,0	638	203	8,0	615	1355	2,5	36
205/65R15	94H	6,0	646	207	8,0	670	1475	2,5	36

DELUM

EVOLUTION 2

Good control on dry and wet surfaces, smooth handling and ride comfort are the main characteristics in a product designed for urban long or short distance situations.

NON
DIRECTIONAL

IA-102



USE



CITY

PLUS



HANDLING



WEAR LIFE

ECO



LOW NOISE



SAVE FUEL

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
165/80R13	80S	4,5	593	163	7,5	487	1075	2,4	35
185/60R14	82H	5,5	578	185	8,0	475	1045	2,5	36
205/65R15	94H	6,0	647	206	8,0	670	1475	2,5	36

EVOLUTION SP2

An agile and sporty tire, suitable for city traffic in all weather conditions. High maneuverability and adherence also on wet surfaces.

NON
DIRECTIONAL

IA-108



USE



CITY

PLUS



RAIN & WET



HANDLING

ECO



LOW NOISE



SAVE FUEL

SIZE	L/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
165/80R13	83S	4.5	594	145	7.2	487	1075	2.4	35
185/70R14	88H	5.5	616	191	7.9	560	1235	2.5	36

EVOLUTION SP

High comfort driving on dry roads, low rolling resistance improve adherence on wet surfaces in a special compound developed to improve tire durability.

NON
DIRECTIONAL

IA-104

USE



CITY

PLUS



RAIN & WET



WEAR LIFE



COMFORT

ECO



LOW NOISE



SAVE FUEL



TECHNICAL REVIEW

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
185/70R13	86H	5,5	588	192	7,9	530	1170	2,5	36
165/65R13	77T	5,0	542	172	7,6	412	910	2,5	36
165/60R13	77H	5,0	542	172	7,6	412	910	2,5	36
175/60R13	77H	5,0	538	178	7,9	412	910	2,5	36
175/70R14	84H	5,0	602	176	7,9	500	1102	2,5	36
175/80R14	88S	5,0	637	177	7,9	560	1235	2,4	35
185/80R14	91S	5,0	653	187	7,9	615	1355	2,4	35
185/70R14	88H	5,5	615	190	8,2	560	1235	2,5	36
195/70R14	91H	6,0	630	202	8,2	615	1355	2,5	36
205/70R14	95H	6,0	644	212	7,9	690	1520	2,5	36
175/65R14	82H	5,0	584	177	7,9	475	1050	2,5	36
185/65R14	86H	5,5	596	190	7,9	530	1170	2,5	36
165/60R14	75H	5,0	558	172	7,9	387	855	2,5	36
205/60R14	88H	6,0	602	210	7,9	560	1235	2,5	36
145/55R14	72H	5,0	536	165	6,3	355	780	2,5	36
205/70R15	96H	6,0	669	208	7,9	710	1565	2,5	36
225/70R15	100H	6,5	696	232	7,9	800	1765	2,5	36
185/65R15	88H	5,5	621	189	7,9	560	1235	2,5	36
185/60R15	84H	5,5	603	189	7,9	500	1100	2,5	36
195/60R15	88H	6,0	614	203	7,9	560	1235	2,5	36
205/60R15	91H	6,0	627	211	7,9	615	1355	2,5	36
185/55R15	82V	6,0	584	196	7,9	475	1050	2,5	36
195/50R15	82V	6,0	577	198	7,9	475	1047	2,5	36
195/55R15	85V	6,0	595	198	7,9	515	1135	2,5	36
215/60R16	95V	6,5	662	223	8,1	690	1520	2,5	36
225/60R16	98V	6,5	676	228	8,1	750	1655	2,5	36
205/55R16	91V	6,5	630	215	8,1	615	1355	2,5	36
225/55R16	95V	7,0	654	233	8,1	690	1520	2,5	36

EVOTECHNO

Our new release, a non-directional pattern with improved stability for great comfort driving. An all-season tire with high performance on wet and dry surfaces.

NON
DIRECTIONAL

IA-110



USE



CITY

PLUS



RAIN & WET



WEAR LIFE



COMFORT

ECO



LOW NOISE



SAVE FUEL

TECHNICAL REVIEW

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
165/80R13	83S	4,5	594	164	7,1	487	1075	2,4	35
165/70R13	79S	5,0	560	169	6,8	437	965	2,5	36
165/65R13	77S	5,0	566	167	6,9	412	908	2,5	36
175/70R13	82H	5,0	576	175	6,8	475	1045	2,5	36
175/60R13	77T	5,0	538	175	7,1	412	908	2,5	36
185/70R13	86H	5,5	590	184	7,3	530	1168	2,5	36
165/60R14	75T	5,0	554	169	7,1	387	853	2,5	36
165/55R14	72H	5,0	538	166	6,3	355	780	2,5	36
175/70R14	84T	5,0	602	173	6,8	500	1102	2,5	36
175/65R14	82H	5,0	583	177	7,1	475	1047	2,5	36
185/70R14	88H	5,5	616	186	7,3	560	1235	2,5	36
185/65R14	86H	5,5	596	187	7,3	530	1170	2,5	36
185/60R14	82H	5,5	578	185	7,4	475	1045	2,5	36
195/70R14	91H	6,0	630	198	7,3	615	1355	2,5	36
205/70R14	95H	6,0	644	207	7,4	690	1521	2,5	36
185/65R15	88H	5,5	621	187	7,4	560	1235	2,5	36
185/60R15	84H	5,5	603	182	7,4	500	1100	2,5	36
185/55R15	82H	6,0	585	189	7,4	475	1047	2,5	36
195/65R15	91H	6,0	636	196	7,4	615	1355	2,5	36
195/60R15	88H	6,0	615	196	7,4	560	1235	2,5	36
195/55R15	85H	6,0	595	193	7,3	515	1135	2,5	36
195/50R15	82H	6,0	577	192	7,4	475	1047	2,5	36
205/70R15	96H	6,0	669	207	7,5	710	1565	2,5	36
205/65R15	94H	6,0	648	202	7,4	670	1477	2,5	36
205/60R15	91H	6,0	627	207	7,5	615	1355	2,5	36
225/70R15	100H	6,5	697	228	7,6	800	1765	2,5	36
195/55R16	87H	6,0	622	196	7,3	545	1202	2,5	36
205/65R16	95H	6,0	672	204	7,6	690	1521	2,5	36
205/55R16	91H	6,5	632	214	7,6	615	1356	2,5	36
215/60R16	95H	6,5	664	216	7,6	690	1521	2,5	36

EVOLUTION

High maneuverability in all weather conditions for this all-seasons tire.
Ideal for the daily chores of the city as well as for your weekend getaways.

NON
DIRECTIONAL

IA-101



USE



CITY

PLUS



RAIN & WET



WEAR LIFE

ECO



LOW NOISE



SAVE FUEL

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
155/70R12	73S	4,5	523	153	6,6	365	805	3,0	44
175/70R13	82H	5,0	577	176	8,0	475	1050	2,5	36
185/70R14	88H	5,5	615	190	8,2	560	1235	2,5	36
195/70R14	91H	6,0	630	202	8,2	615	1355	2,5	36
195/65R15	91H	6,0	634	198	7,8	615	1355	2,5	36

H I G H V E L O - C I T Y

Sometimes speed and safety travel the same road. In our top range, high performance is guaranteed without sacrificing the full pleasure of a safe journey.

DELIVUM
ROAD SYMBIOSIS



Nylon Chafer

To protect bead area while mounting/dismounting and other external damage.

Bead Wire

To maintain the contact between tire and the wheel rim.

Double Layers & Wide Steel Belts

Provide tire reinforcement and helps stabilize the tread. Also serves to protect the tire from impact and puncture.

Nylon Cap Ply

To protect steel belt and improve tire performance.

High Turn Up Polyester

To improve sidewall against puncture and better lateral stiffness.

Belt Edge Gum

To prevent separation between belts edge and increase durability.

Inner Liner

Low air permeability compound for better air retention.

High Apex with High & Hardness Bead Filler

A triangular extruded profile that placed to the top of the bead wire will improve tire performance especially at high speed.

VELOCITÀ GN2

Ultra High Performance asymmetrical tread pattern for excellent maneuverability and braking performance on both dry and wet conditions. Extra wide tread pattern improves stability when driving.

ASYMMETRICAL

IA-182



USE



HIGH SPEED

PLUS



RAIN & WET



WEAR LIFE



HANDLING

ECO



LOW NOISE



SAVE FUEL

A TIRE FOR ALL CONDITIONS

by TOP GEAR Malaysia

"Safety and stability is of utmost importance in the Velocita GN2's development. This is delivered by its **asymmetrical tread pattern with T-shape sipes** and a centre groove that help **accelerate water dissipation**, thus reducing the risks of aquaplaning substantially. Wet performance is especially important in Malaysia where torrential rain is common, and given the Velocita GN2's qualities, it's an **ideal fit for passenger cars**.

These traction-aig technologies are backed by the use of advanced rubber compounds which ensure that cornering performance and overall ride comfort are maintained even in dry

conditions. The Velocita GN2 is a **versatile tyre for all seasons** which guarantees peace of mind with the brand's **ISO 9001 certification**.

Consumer tests using Velocita GN2 tyres in 215/55 R17 size proved that they not only match but also **exceed benchmarks set by the industry's more well-known names**. This was deduced after hard driving on Velocita GN2 tyres, a testament to their **dynamic abilities** as well as their **long-term quality**.

The Velocita GN2 is also available in 15 to 20-inch-wheel sizes. And with the performance, safety, reliability and value for money it offers, it's a choice you **won't regret**."

TECHNICAL REVIEW

SIZE	L/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
205/55R15	88V	6,5	610	214	8,0	560	1235	2,5	36
205/60R16	92V	6,0	652	209	8,0	630	1389	2,5	36
225/60R16	98V	6,5	676	228	8,0	750	1653	2,5	36
235/60R16	100V	7,0	688	240	8,0	800	1764	2,5	36
205/50R16	87V	6,5	614	212	8,0	545	1200	2,5	36
225/50R16	92V	7,0	633	230	8,0	630	1389	2,5	36
225/65R17	102 H	6,5	724	228	8,0	850	1875	2,5	36
225/60R17	99V	6,5	702	228	8,0	775	1709	2,5	36
215/55R17	94V	7,0	668	229	8,0	670	1475	2,5	36
225/55R17	97V	7,0	680	233	8,0	730	1610	2,5	36
235/55R17	99V	7,5	690	245	8,0	775	1709	2,5	36
215/50R17	91V	7,0	648	228	8,0	615	1355	2,5	36
225/50R17	94V	7,0	659	233	8,0	670	1475	2,5	36
205/45ZR17	88W XL	7,0	615	206	8,0	560	1235	2,9	42
215/45ZR17	91W XL	7,0	628	212	8,0	615	1355	2,9	42
225/45ZR17	94W XL	7,5	633	228	8,0	670	1480	3,0	44
235/45ZR17	97W XL	8,0	644	237	8,0	730	1610	3,0	44
245/45R17	99W XL	8,0	655	245	8,0	775	1710	2,9	42
235/50R18	97V	7,5	693	245	8,0	730	1609	2,5	36
245/50R18	100V	7,5	704	252	8,0	800	1765	2,5	36
225/45ZR18	95W XL	7,5	659	228	8,0	690	1520	3,0	44
235/45ZR18	98W XL	8,0	669	236	8,0	750	1653	2,9	42
245/45ZR18	100W XL	8,0	676	244	8,0	800	1765	3,0	44
275/45ZR18	103W	9,0	705	277	8,0	875	1929	2,5	36
225/40ZR18	92W XL	8,0	636	226	8,0	630	1390	2,9	42
235/40ZR18	95W XL	8,5	645	243	8,0	690	1520	3,0	44
245/40ZR18	97W XL	8,5	653	249	8,0	730	1610	3,0	44
245/45ZR19	102W XL	8,0	707	243	8,0	850	1875	2,9	42
245/40ZR19	98W XL	8,5	680	246	8,0	750	1655	2,9	42
275/40ZR19	105W XL	9,5	705	275	8,0	925	2040	2,9	42
235/35ZR19	91W XL	8,5	649	237	8,0	615	1356	2,9	42
245/35ZR19	93W XL	8,5	657	247	8,0	650	1433	2,9	42
245/45ZR20	103 W XL	8,0	731	243	8,0	875	1929	2,9	42
275/35ZR20	102W XL	9,5	706	276	8,0	850	1874	2,9	42
245/40ZR20	99W XL	8,5	707	244	8,0	775	1710	2,9	42
245/35ZR20	95W XL	8,5	681	245	8,0	690	1520	2,9	42

CITY SURFER

Great performances in every condition, especially on wet surfaces.
The best ratio between comfort and durability.

ASYMMETRICAL

IA-181



USE



CITY

PLUS



RAIN & WET



WEAR LIFE



COMFORT

ECO



LOW NOISE



SAVE FUEL

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
225/65R17	102H	6,5	723	228	8,0	850	1875	2,5	36

JUST FOR RALLY

When the power is not enough you need some extra traction.
Boost your truck with Pro Rally and its tread pattern especially
designed to snub the mud and your opponents.

DELIUM
ROAD SYMBIOSIS

DIRECTIONAL
FOR RALLY

IA-107

**MADE FOR
RALLY**



Velocità UHP

Superb handling for this long lasting
compound, developed to meet those who
want to balance the demands of every day
life with a sporty driving style.

PRO RALLY

Enjoyable road comfort and improved traction makes this tire the perfect co-driver in every competition. When the smallest mistake can be fatal it is better to have good assistance.

NON-DIRECTIONAL
FOR RALLY

IA-103

USE



RALLY

PLUS



RAIN & WET



HANDLING



SIZE	LI/SI index	R.W. Inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
175/70R14	84S	5,0	604	173	10,0	500	1100	2,5	36

PRO RALLY

When the power is not enough you need some extra traction. Boost your truck with Pro Rally and its tread pattern especially designed to snub the mud and your opponents.

DIRECTIONAL
FOR RALLY

IA-107



USE



RALLY

PLUS



RAIN & WET



HANDLING

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
185/65R14	86S	5.5	602	183	10.9	530	1170	2.5	36
205/65R15	96S	6.0	649	204	10.9	710	1565	3.0	44

ENJOY S - A - F E T Y

Why compromise when you can enjoy premium safety, comfort, efficiency and performance in bad weather?

DELIVUM
ROAD SYMBIOSIS

NON
DIRECTIONAL

IT-203



Evotrac XT

Improved tread stabilization and side reinforcement to protect the tire from impact and punctures.

EVORANGER

Evoranger is a high-performance all season tire with top efficiency on dry and wet conditions even on light snow. Evoranger provides comfort and quiet ride with excellent traction.

NON
DIRECTIONAL

IT-206



USE



TOURING

PLUS



RAIN & WET



WEAR LIFE



COMFORT

ECO



LOW NOISE



SAVE FUEL

SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
265/70R16	111T	8,0	778	272	9,5	1090	2403	3,5	51
245/65R17	105T	7,0	750	246	9,5	925	2039	3,5	51
235/60R18	103H	7,0	739	240	9,5	875	1929	3,5	51
265/65R18	114T	8,0	801	272	9,5	1180	2601	3,5	51
275/55R20	111H	8,5	810	282	9,5	1090	2403	3,5	51
265/50R20	111HXL	8,5	774	275	9,5	1090	2403	3,4	50
275/50R20	109H	8,5	784	279	9,5	1030	2271	3,5	51
285/50R20	111H	9,0	795	293	9,5	1090	2403	3,5	51
285/45R22*	110H	9,5	815	285	9,5	1060	2337	3,5	51

* Coming Soon

DELUM

EVOTRAC XT

Improved tread stabilization and side reinforcement to protect the tire from impact and punctures.

NON
DIRECTIONAL

IT-203

USE



TOURING

PLUS



RAIN & WET



WEAR LIFE



COMFORT



SIZE	LI/SI index	R.W. Inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
265/70R17	113S	8,0	804	275	10,0	1150	2535	3,5	51
265/65R17	112T	8,0	776	272	10,0	1120	2470	3,5	51
275/65R17	115T	8,0	790	278	9,3	1215	2680	3,5	51
285/65R17*	116T	8,5	802	292	10,0	1250	2756	3,5	51

* Coming Soon

SW TYPE: Outline White Letters / Outline Black Letters

EVOTRAC ST

A strong and flexible tire which provides good handling and a comfortable ride in every terrain and weather condition.

NON
DIRECTIONAL

IT/KT-202

USE



TOURING

PLUS



RAIN & WET



WEAR LIFE



COMFORT



SIZE	LI/SI index	R.W. inch	O.O. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
275/70R16	114T	8,0	792	280	10,0	1180	2600	3,5	51
255/70R15C	112/ 110T	7,5	739	257	9,0	1120 (single) 2469 (single)	1060 (dual) 2337 (dual)	3,75	54

SW TYPE: Raise White Letters / Raise Black Letters

DELUM

ALL TER- RAIN

Adjust seat and mirrors, fasten your seat belt and free your engines roar. This range has been developed to let you enjoy the pleasure of a comfortable ride while the tires are focused on ensuring long lasting safety.

DELIVUM
ROAD SYMBIOSIS



Double polyester body plies

Strong and flexible PET material, provides good handling and comfort ride.

Nylon Chafer

To protect bead area while mounting/dismounting and other external damage.

Bead Wire

To provide reinforcement and maintain a proper grip of the tire on the rim.

Nylon Cap Ply

To protect steel belt and improve tire performance.

Double Layers & Wide Steel Belts

Provide tire reinforcement and helps stabilize the tread. Also serves to protect the tire from impact and puncture.

Belt Edge Gum

To prevent separation between belts edge and increase durability.

Inner liner

Low air permeability compound for better air retention.

High Apex with High & Hardness Bead Filler

A triangular extruded profile that placed to the top of the bead wire will improve tire performance especially at high speed.

TERRA FRONTIER

A completely new pattern for the best performance. It has staggered shoulder lug to improve traction and multi pitches tread block to minimize noise.

NON
DIRECTIONAL

IA/KA-207



USE



TOURING

PLUS



RAIN & WET



DURABILITY



HANDLING

SIZE	L/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
32x11.5 R15LT 6PR	113Q	9,0	800	293	10,6	1150	2535	3,4	50
31x10.5 R15LT 6PR	109Q	8,5	777	283	10,6	1030	2270	3,4	50
245/70 R16	111TXL	7,0	750	245	10,6	1090	2403	3,4	50
265/70 R16	116TXL	8,0	779	274	10,5	1250	2756	3,4	50
265/65 R17	116TXL	8,0	777	275	10,4	1250	2756	3,4	50
285/65 R17	120TXL	8,5	802	292	10,6	1400	3086	3,4	50
265/60 R18	114TXL	8,0	779	270	10,5	1180	2601	3,4	50
285/60 R18	120TXL	8,5	800	290	10,5	1400	3086	3,4	50
265/50 R20	112TXL	8,5	778	270	10,5	1120	2469	3,4	50
275/55R20	117TXL	8,5	813	277	10,6	1285	2833	3,4	50
275/45R20	110XL	9,0	758	269	10,6	1060	2337	3,4	50
285/50 R20	116TXL	9,0	802	286	10,5	1250	2756	3,4	50

SW TYPE: RWL / RBL / OSBL. For 20" available only OSBL

DELUM

TERRA ROAMER A/T

High comfort driving and impressive adherence on wet surfaces.

The tread pattern is the perfect balance between a racing and a rally tire.

Guaranteeing great performance in every condition and terrain with Improved durability.

NON
DIRECTIONAL

IA-201

USE



TOURING

PLUS



RAIN & WET



WEAR LIFE



SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
235/70R15	103S	7,0	710	235	10,2	875	1930	2,5	36

TERRA CRUISER

Another hybrid product with high performance on urban terrain or on off road paths. Its non-directional pattern improve adherence to guarantee safe driving.

NON
DIRECTIONAL

IA-205

USE



TOURING

PLUS



RAIN & WET



WEAR LIFE



SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
185/70R14	88S	5,5	616	190	10,0	560	1235	2,5	36
195/70R14	91S	6,0	629	203	10,0	615	1355	2,5	36
195/65R15	91S	6,0	635	200	10,0	615	1355	2,5	36
205/70R15	96S	6,0	670	210	10,0	710	1565	2,5	36
235/75R15	105S	6,5	733	237	10,8	925	2040	2,5	36
235/75R15	109S XL	6,5	733	237	10,8	1030	2270	2,9	42

SW TYPE: Outline White Letters / Outline Black Letters

DELUM

TERRA ROAMER A/T PLUS

All the performances of a highway tire with great comfort drive on urban roads combined with the characteristics of an off-road compound for long durability and impressive handling on wet and dry surface.

NON
DIRECTIONAL

IA-204

USE



TOURING

PLUS



RAIN & WET



WEAR LIFE



SIZE	LI/SI index	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD kg	MAX LOAD lbs.	INFLATION bar	INFLATION psi
245/70R16	111T XL	7.0	750	250	10,8	1090	2403	2,9	42

SW TYPE: Outline White Letters / Outline Black Letters

M U D T E R - R A I N

When the road gets messy and the asphalt turns into dirt there is no time for excuses. It is not about good or bad weather, it is only a matter of good or bad equipment. Be prepared!

DELIVUM
ROAD SYMBIOSIS



Double Polyester Body Plies

Excellent strength and durability yet provide comfort ride characteristic.

Nylon Chafer

To protect bead area while mounting/dismounting and other external damage.

Bead Wire

To provide reinforcement and maintain proper grip of the tire on the rim.

Stronger Steel Belts

Stabilize tread area, provide longer tread life, better steering control and lower rolling resistance.

Nylon Cap Ply Jointless Full Breaker

To protect steel belt and improve tire performance

Double Layers Belt Edge Gum

To prevent separation between belts edge and increase durability.

SECOND BELT
FIRST BELT
Double Layers Belt Edge Gum

Inner Liner

Low air permeability compound serves the similar function as an innertube to hold high pressure air inside.

Special Reinforced Bead Filler Compound

TERRA RAIDER **NEW**

The new Terra Raider tire is designed with high void-ratio and open shoulder block for enhancing grip in off road, muddy, sandy or snowy conditions.

Three ply polyester construction on sidewall is to provide better puncture resistance and good handling. Aggressive mountain sidewall design is for traction enhancement and side impact protection.

NON
DIRECTIONAL

KU-255

USE



OFF-ROAD

PLUS



RAIN & WET



DURABILITY



HANDLING



TECHNICAL REVIEW

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
LT265/75R16	112/109Q	6	7,5	810	273	14,6	1120	2470	1030	2270	3,5	50
LT265/75R16	123/120Q	10	7,5	810	273	14,6	1550	3415	1400	3085	5,5	80
LT245/75R17	121/118Q	10	7,0	806	249	14,8	1450	3195	1320	2910	5,5	80
LT265/70R17	121/118Q	10	8,0	810	272	14,6	1450	3195	1320	2910	5,5	80
33x12.50R17LT	120Q	10	10,0	832	323	14,3	1400	3085	-	-	4,5	65
35x12.50R17LT	121Q	10	10,0	883	329	14,6	1450	3195	-	-	4,5	65
37x12.50R17LT *	124Q	10	10,0	935	321	14,8	1600	3525	-	-	4,5	65
LT265/70R18	124/121Q	10	8,0	832	271	14,8	1600	3525	1450	3195	5,5	80
LT275/70R18	125/122Q	10	8,0	847	277	14,3	1650	3640	1500	3305	5,5	80
LT275/65R18	123/129Q	10	8,0	820	277	14,5	1550	3415	1400	3085	5,5	80
33x12.50R18LT	118Q	10	10,0	830	318	14,4	1320	2910	-	-	4,5	65
35x12.50R18LT	123Q	10	10,0	882	322	14,8	1550	3415	-	-	4,5	65
37x12.50R18LT *	128Q	10	10,0	935	321	14,8	1800	3970	-	-	4,5	65
LT265/60R20	121/118Q	10	8,0	832	272	14,8	1450	3195	1320	2910	5,5	80
LT275/65R20	126/123Q	10	8,0	870	280	14,4	1700	3750	1550	3415	5,5	80
LT275/60R20	123/120Q	10	8,0	837	278	14,4	1550	3415	1400	3085	5,5	80
33x12.50R20LT	114Q	10	10,0	834	319	14,4	1180	2600	-	-	4,5	65
35x12.50R20LT	121Q	10	10,0	880	318	14,4	1450	3195	-	-	4,5	65
37x12.50R20LT *	126Q	10	10,0	935	321	14,8	1700	3750	-	-	4,5	65
37x13.50R20LT *	127Q	10	10,0	935	345	14,8	1750	3860	-	-	4,5	65
35x12.50R22LT	117Q	10	10,0	882	313	14,4	1285	2835	-	-	4,5	65
37x12.50R22LT *	123Q	10	10,0	935	321	14,8	1550	3415	-	-	4,5	65
37x13.50R22LT *	123Q	10	10,0	935	345	14,8	1550	3415	-	-	4,5	65

* Coming Soon

SW TYPE: RBL

TERRA WARRIOR

On/off road light truck Delium Tire designed with balanced void ratio, compromising demand of both on-road and off-road performance.

NON
DIRECTIONAL

KU-253

USE



OFF-ROAD

PLUS



RAIN & WET



DURABILITY



SW TYPE: Outline White Letters / Outline Black Letters

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
27x8.50R14LT	95Q	6	7.0	680	228	14,0	690	1520	-	-	3,5	50
LT235/75R15	104/101Q	6	6,5	739	230	14,1	900	1985	825	1820	3,5	50
31x10.50R15LT	109Q	6	8,5	781	281	14,4	1030	2270	-	-	3,5	50
33x12.50R15LT	108Q	6	10,0	832	321	14,4	1000	2205	-	-	2,5	35
LT245/75R16	108/104Q	6	7,0	783	250	14,4	1000	2205	910	2005	3,5	50
LT245/75R16	120/116Q	10	7,0	783	250	14,4	1380	3042	1260	2778	5,5	80
LT265/75R16	112/109Q	6	7,5	810	271	14,4	1120	2470	1030	2270	3,5	50
LT305/70R16	124/121Q	10	9,0	840	314	14,4	1600	3525	1450	3195	4,5	65
LT265/65R17	120/117Q	10	8,0	781	272	14,4	1400	3085	1285	2835	5,5	80
LT265/70R17	121/118Q	10	8,0	811	272	14,4	1450	3195	1320	2910	5,5	80
33x12.50R20LT	114Q	10	10,0	829	320	14,4	1180	2600	-	-	4,5	65

TERRA RANGER

Extra grip off road, staggered tread blocks to provide comfort ride and great handling when driving on the highway.

NON
DIRECTIONAL

KU-251



SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
27x8.50R14LT	95Q	6	7,0	680	228	14,0	690	1520	-	-	3,5	50
31x10.50R15LT	109Q	6	8,5	780	283	14,4	1030	2270	-	-	3,5	50
LT265/75R16	112/109Q	6	7,5	810	273	14,4	1120	2470	1030	2270	3,5	50

SW TYPE: Outline White Letters / Outline Black Letters

TERRA MANIA

Off road light truck DELIUM tire with extreme void ratio, compromising demand of both on Mud Terrain and Extreme Off Road performance.

DIRECTIONAL

SK-893

USE



OFF-ROAD

PLUS



RAIN & WET



DURABILITY



SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD SINGLE		INFLATION	
							kg	lbs.	bar	psi
31X10.5-15 LT	109 N	6	8,5	781	265	18,7	1030	2270	3,1	45
33X10.5-15 LT	114M	6	8,5	832	278	20,2	1180	2600	3,1	45
33X13.5-15 LT	109L	6	11,0	832	336	20,5	1030	2270	2,1	30
35X10.5-15 LT	120L	6	8,5	883	287	20,2	1400	3085	3,1	45
35X10.5-16 LT	119L	6	8,5	885	281	20,2	1360	2988	3,1	45

COM- MER- CIAL

Traffic and weather conditions are not a problem anymore. Thanks to the high standards of durability and maneuverability every product in this range is the solution for any daily routine.

DELIUM
ROAD SYMBIOSIS



Double Polyester Body Plies

Excellent strength and durability yet provide comfort ride characteristic.

Nylon Chafer

To protect bead area while mounting/dismounting and other external damage.

Bead Wire

To provide reinforcement and maintain proper grip of the tire on the rim.

Stronger Steel Belts

Stabilize tread area, provide longer tread life, better steering control and lower rolling resistance.

Nylon Cap Ply Jointless Full Breaker

To protect steel belt and improve tire performance.

Double Layers Belt Edge Gum

To prevent separation between belts edge and increase durability.

SECOND BELT

FIRST BELT

Double Layers
Belt Edge Gum

Inner Liner

Low air permeability compound serves the similar function as an innertube to hold high pressure air inside.

Special Reinforced Bead Filler Compound

POWER TREKKER

Non-directional pattern designed for extra-adherence on wet surfaces. An all season tire with special compound developed to provide high resistance in all temperatures.

NON
DIRECTIONAL

KA-105

USE



CITY

PLUS



WEAR LIFE



DURABILITY



SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
6.50R14C	102/100P	8	5,0	696	187	9,8	850	1875	800	1765	4,5	65
195R14C	106/104P	8	5,5	679	204	9,2	950	2095	900	1985	4,5	65
195/85R15LT	113/111L	-	5,5	710	195	8,6	1150	2535	1090	2405	6,0	87
215/70R15C	109/107R	8	6,5	683	220	10,2	1030	2270	975	2150	4,5	65
225/70R15C	112/110R	8	6,5	697	228	10,2	1120	2470	1060	2335	4,5	65
195/85R16LT	114/112L	-	5,5	737	193	8,6	1180	2600	1120	2470	6,0	87
215/70R16C	108/106T	6	6,5	708	221	10,2	1000	2205	950	2095	3,75	55

POWER TROUPER

Top results in terms of durability. Comfortable handling in different weather conditions especially in the urban landscapes.

NON
DIRECTIONAL

KR-106



USE



CITY

PLUS



WEAR LIFE



DURABILITY

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
195R15C	103/101R	6	5,5	694	200	8,2	875	1930	825	1820	3,75	55
195R15C	104/104R	8	5,5	694	200	8,2	950	2095	900	1985	4,5	65

DELUM

POWER CRUISER

Skillful tire with high maneuverability on wet and dry surfaces.
Comfortable drive in the city environment with high-longevity performance.

NON
DIRECTIONAL

KA-104

USE



CITY

PLUS



WEAR LIFE



DURABILITY



SIZE	LI/SI index	P.R.	R.W. inch	D.D. mm	S.W. mm	N.S.D. mm	MAX LOAD		INFLATION			
							SINGLE	DOUBLE	bar	psi		
							kg	lbs.	kg	lbs.		
4.50R14C	102/100P	8	5,0	696	187	9,8	850	1875	800	1765	4,5	65

POWER RANGER

The urban hero. Pattern design provides superior braking performance. High durability results in all temperatures and road conditions.

NON
DIRECTIONAL

KA-103

USE



CITY

PLUS



WEAR LIFE



DURABILITY



SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
195R14C	104/104N	8	5,5	468	200	9,9	950	2095	900	1985	4,5	65
215/70R15C	109/107R	8	6,5	483	220	10,2	1030	2270	975	2150	4,5	65
225/70R15C	112/110R	8	6,5	498	228	10,2	1120	2470	1040	2335	4,5	65

POWER SAVER II

Safety and endurance are our main targets. This all season tire reaches impressive durability levels and great vehicle control on wet and dry terrain.

NON
DIRECTIONAL

KA-102

USE



CITY

PLUS



WEAR LIFE



DURABILITY



SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
195R15C	103/101R	6	5,5	489	197	8,2	875	1930	825	1820	3,75	55
195R15C	106/104R	8	5,5	489	197	8,2	950	2095	900	1985	4,5	65

POWER SAVER

Developed to please the most picky driver. Reliable on wet, superb on dry.
Smooth comfort driving in urban landscape with improved endurance quality.

NON
DIRECTIONAL

KA-101

USE



CITY

PLUS



WEAR LIFE



DURABILITY



SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
165R13C	91/89N	6	4,5	601	165	9,0	615	1355	580	1280	3,75	55
165R13C	94/92N	8	4,5	601	165	9,0	670	1475	640	1410	4,5	65
175R13C	97/95N	8	5,0	613	177	9,5	730	1610	690	1520	4,5	65
185R14C	104/102N	8	5,5	653	190	10,3	900	1985	850	1875	4,5	65

DELUM

SUPER POWER

Elegant pattern design with deep grooves to improve water drainage.
High durability compound reaches top comfort driving on urban terrain.

NON
DIRECTIONAL

JR-101

USE



CITY

PLUS



WEAR LIFE



DURABILITY



SIZE	LI/SI Index	P.R.	R.W. Inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
5.00R12LT	77/75P	6	3,5	564	143	9,3	415	915	385	850	3,75	55
5.00R12LT	83/81P	8	3,5	564	143	9,3	485	1070	465	1025	4,5	65

SUPER POWER

Elegant pattern design with deep grooves to improve water drainage.
High durability compound reaches top comfort driving on urban terrain.

NON
DIRECTIONAL

JR/KR-102

USE



CITY

PLUS



WEAR LIFE



DURABILITY



SIZE	LI/SI index	P.R.	R.W. Inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
155R12C	88/86P	8	4,5	556	158	8,5	560	1235	530	1170	4,5	65
5.00R12LT	83/81P	8	3,5	567	148	9,5	485	1070	465	1025	4,5	65
5.50R12LT	92/90P	10	4,0	598	166	8,7	630	1389	600	1323	5,0	73
5.50R12LT	96/94P	12	4,0	598	166	8,7	710	1565	670	1477	6,0	87
5.50R13LT	95/93P	10	4,0	628	166	8,9	690	1520	655	1445	5,25	76
5.50R13LT	99/97P	12	4,0	628	166	8,9	765	1690	725	1600	6,25	91

DELUM

POWER TRAILER

Energy saver, high comfort and safety on every road terrain.
Optimized compound for high durability.

NON
DIRECTIONAL

JA/KA-108



USE



CITY

PLUS



WEAR LIFE



DURABILITY

SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
155/70R12C	104N/102N		4.5	523	155	5.8	900	1980	850	1870	6.5	94
185/60R12C	104N/102N		5.5	527	185	6.2	900	1980	850	1870	6.5	94
195/60R12C	104N/102N		6.0	531	194	7.6	900	1980	850	1870	6.5	94
195/50R13C	104N/102N		6.0	525	191	7.9	900	1980	850	1870	6.5	94

STEEL TECHNO

Spoil your vehicle with Steel techno.
Best compromise between durability and comfort performance.
Agile driving in dry surface and high adherence on wet.

NON
DIRECTIONAL

KR-302



SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
7.00R16LT	113/111L	10	5,5	773	193	9,8	1130	2490	1075	2370	5,25	76
7.00R16LT	115/114L	12	5,5	773	198	9,8	1230	2710	1170	2580	6,0	87
7.00R16LT	118/116L	14	5,5	773	198	9,8	1320	2905	1260	2775	6,5	94
7.50R16LT	121/119L	12	5,5	800	210	10,2	1440	3175	1370	3020	6,5	94
7.50R16LT	122/121L	14	5,5	800	210	10,2	1510	3330	1440	3175	7,0	102

STEEL TECHNO

All steel light truck Delium tire with great performances in terms of comfort and with no compromise on safety and durability.

NON
DIRECTIONAL

KR-304

USE



CITY

PLUS



WEAR LIFE



DURABILITY



SIZE	LI/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD		INFLATION			
							SINGLE kg	DOUBLE kg	bar	psi		
7.50R16LT All Steel	122/121L	14	5,5	810	209	11,6	1510	3330	1440	3175	7,0	102

STEEL FORCE NEW

The KA-305 Steel Force is a great choice. This tire is developed for all positions of tire. The four ribs tread pattern provide excellent traction and durability in tough on/off road conditions. The tie-bars in the center help fight irregular wear. The bottom groove protectors prevent stone drilling and stone retention.

NON
DIRECTIONAL

KA-305



USE



CITY

PLUS



WEAR LIFE



DURABILITY



RAIN & WET

SIZE	L/SI index	P.R.	R.W. inch	O.D. mm	S.W. mm	N.S.D. mm	MAX LOAD				INFLATION	
							SINGLE		DOUBLE		bar	psi
							kg	lbs.	kg	lbs.		
7.50R16LT All Steel	122/121L	14	5.5	810	212	12.2	1510	3330	1440	3175	7.0	102

MARKINGS

ON THE SIDEWALL

LOAD INDEX & SPEED SYMBOL

The Load Index and Speed Symbol give unambiguous and comparable information on the maximum speed supported at the associated load capacity - independent of manufacture and dimension - as the codes can be directly converted to actual values. The tables give an overview of relevant LI and SS codes.

LOAD INDEX

LI	kg	lb	LI	kg	lb	LI	kg	lb	LI	kg	lb	LI	kg	lb	LI	kg	lb
0	45	99	28	100	220	56	224	496	84	500	1102	112	1120	2469	140	2500	5512
1	46.2	102	29	103	227	57	230	507	85	515	1135	113	1150	2535	141	2575	5677
2	47.5	105	30	106	234	58	236	520	86	530	1168	114	1180	2601	142	2650	5842
3	48.7	107	31	109	243	59	243	534	87	545	1202	115	1215	2679	143	2725	6008
4	50	110	32	112	247	60	250	551	88	560	1235	116	1250	2756	144	2800	6173
5	51.5	114	33	115	254	61	257	567	89	580	1279	117	1285	2833	145	2900	6393
6	53	117	34	118	261	62	265	586	90	600	1323	118	1320	2910	146	3000	6614
7	54.5	120	35	121	267	63	272	600	91	615	1356	119	1360	2998	147	3075	6779
8	56	123	36	125	274	64	280	617	92	630	1389	120	1400	3086	148	3150	6944
9	58	128	37	128	282	65	290	639	93	650	1433	121	1450	3197	149	3250	7165
10	60	132	38	132	291	66	300	661	94	670	1477	122	1500	3307	150	3350	7385
11	61.5	136	39	136	300	67	307	677	95	690	1521	123	1550	3417	151	3450	7606
12	63	139	40	140	309	68	315	694	96	710	1565	124	1600	3527	152	3550	7826
13	65	143	41	145	320	69	325	716	97	730	1609	125	1650	3638	153	3650	8047
14	67	148	42	150	331	70	335	739	98	750	1653	126	1700	3748	154	3750	8267
15	69	152	43	155	342	71	345	761	99	775	1709	127	1750	3858	155	3875	8563
16	71	157	44	160	353	72	355	783	100	800	1764	128	1800	3968	156	4000	8818
17	73	161	45	165	364	73	365	805	101	825	1819	129	1850	4079	157	4125	9094
18	75	166	46	170	375	74	375	827	102	850	1874	130	1900	4189	158	4250	9379
19	77.5	171	47	175	386	75	387	853	103	875	1929	131	1950	4299	159	4375	9665
20	80	176	48	180	397	76	400	882	104	900	1984	132	2000	4409	160	4500	9921
21	82.5	182	49	185	408	77	412	908	105	925	2039	133	2060	4541	161	4625	10196
22	85	187	50	190	419	78	425	937	106	950	2094	134	2120	4674	162	4750	10472
23	87.5	193	51	195	430	79	437	963	107	975	2149	135	2180	4806	163	4875	10747
24	90	198	52	200	441	80	450	992	108	1000	2205	136	2240	4938	164	5000	11023
25	92.5	204	53	206	454	81	462	1019	109	1030	2271	137	2300	5071	165	5150	11354
26	95	209	54	212	467	82	475	1047	110	1060	2337	138	2360	5203	166	5300	11684
27	97.5	215	55	218	481	83	487	1074	111	1090	2403	139	2430	5357	167	5450	12015

SPEED SYMBOL

SI	km/h	mph
A1	5	3
A2	10	6
A3	15	9
A4	20	13
A5	25	16
A6	30	19
A7	35	22
A8	40	25
B	50	31
C	60	38
D	65	41
E	70	44
F	80	50
G	90	56
J	100	63
K	110	69
L	120	75
M	130	81
N	140	88
P	150	94
Q	160	100
R	170	104
S	180	110
T	190	119
U	200	125
H	210	131
V	240	150
W	270	169
Y	300	188



**DRIVE
YOUR
SOUL**

DELIUM
ROAD SYMBIOSIS

facebook



**WE LIKE
TO BE LIKED
SO PLEASE
LIKE US!**

**SCAN THE QR-CODE
WITH YOUR PHONE.**

You'll be redirected to DELIUM TIRES official fanpage. Like us, you'll be up-to-date about DELIUM's latest products, news and events.

www.facebook.com/DeliumTires

The Company reserves the right to make all technical modifications necessary to improve the products offered in this catalogue, without prior notice and does not assume any liability for slight colour differences that may be noted between originals and printed material.
Some models, sizes and colours may not be available in all markets.

Copyright 2018 by PT INDUSTRI KARET DELI. Subject to technical changes, no reliability for printer's error. 03/18.

PHILOSOPHY

WHAT'S #SYMBIOSIS?

“symbiosis”

[sim-bee-oh-sis, -bahy-]

noun

Biology: the living together of two dissimilar organisms, as in mutualism, commensalism, amensalism, or parasitism.

SYMBIOSIS is a close relationship between elements, things or people of a different nature in which the organisms benefit from living together in intimate communion.

Our tires are studied and developed to work in perfect compatibility with the road.

An intimate connection between two elements creating a perfect balance.

Road symbiosis happens when tire and road work in complete harmony together.

