

# CATALOG

---



Tires | Lubricants | Batteries | Tools and supplies | Car care products  
Equipment | Brake pads | Filters | Car accessories | Wiper blades



Since 1960

 81 88 81 81  
 05 40 00 08  
 CUSTOMER SERVICE:  
81 81 81 11  
 SECTOR 32 - STREET 49  
CHOUEIFAT - LEBANON  
 INFO@SAKA.COM.LB  
 WWW.SAKA.COM.LB

# THE WORLD AT YOUR REACH

## TABLE OF CONTENTS

|                            |    |             |     |
|----------------------------|----|-------------|-----|
| PASSENGER CAR TIRE         | 13 | LONG HAUL   | 55  |
| SPORT UTILITY VEHICLE TIRE | 26 | REGIONAL    | 67  |
| ALL SEASON TIRE            | 36 | ON&OFF ROAD | 95  |
| TRAILER TIRE               | 40 | OFF ROAD    | 108 |
| LIGHT TRUCK TIRE           | 42 | LIGHT TRUCK | 114 |
| WINTER TIRE                | 46 | COACH&URBAN | 129 |
|                            |    | WINTER      | 133 |



# COMPANY INTRODUCTION

“

Shandong Linglong Tyre Co., Ltd. is a technical tire manufacturer integrating tire design, development, manufacturing and sales. Founded in 1975, the company, with over 40-year forging ahead, has seven R&D centers, seven manufacturing bases across the world currently and over 17,000 employees, with its products widely used on passenger vehicles, commercial vehicles, and engineering machinery vehicles. It has built diversified brand system for different markets, including Linglong, ATLAS, LEAO and EVOLUXX etc. Linglong Tire had successful access to the A share market on July 6, 2016. It has been included in the three international indexes, the MSCI Index, the FTSE Russell Index and the S&P Emerging Market Indexes, winning the unanimous favor of the international capital market.

”




## BRAND VALUE

Linglong has sponsored over 90 sports events and teams worldwide, such as Juventus and VfL Wolfsburg, to enhance its brand awareness and influence. It strengthens the retail network construction, with nearly 100,000 marketing outlets globally, promoting its brand reputation and customer loyalty through reliable product quality and excellent service. To attracting more target consumers, the company launches at airports and high-speed rail stations in major cities across the world and several CCTV programs. For many years, Linglong has been participating SEMA show and Automechanika Dubai etc. to enhance its product reputation and build the international brand image. Linglong's brand value reached 59.672 Billion RMB in 2021.

The company's products are exported to 173 countries across the world, covering Europe, Middle East, Americas, Asia Pacific, and Africa, and provides OE service for over 100 manufacturing bases of 60 global well-known automakers. Seven of Top 10 global automakers would like to choose Linglong Tire.

Linglon's "7+5" global layout is to build seven Chinese manufacturing bases as well as five overseas manufacturing bases. At present, the company has five Chinese manufacturing bases in Zhaoyuan, Dezhou, Liuzhou, Jingmen, Changchun (under construction) and two overseas manufacturing bases in Thailand and Serbia (under construction), and plans to build the sixth Chinese manufacturing base in Tongchuan, Shaanxi Province and the seventh one in Hefei, Anhui Province. Besides, the company has established R&D institutions in Germany, America, Beijing, Shanghai, Jinan, Yantai and Zhaoyuan, building an integrated production and R&D pattern across the world.



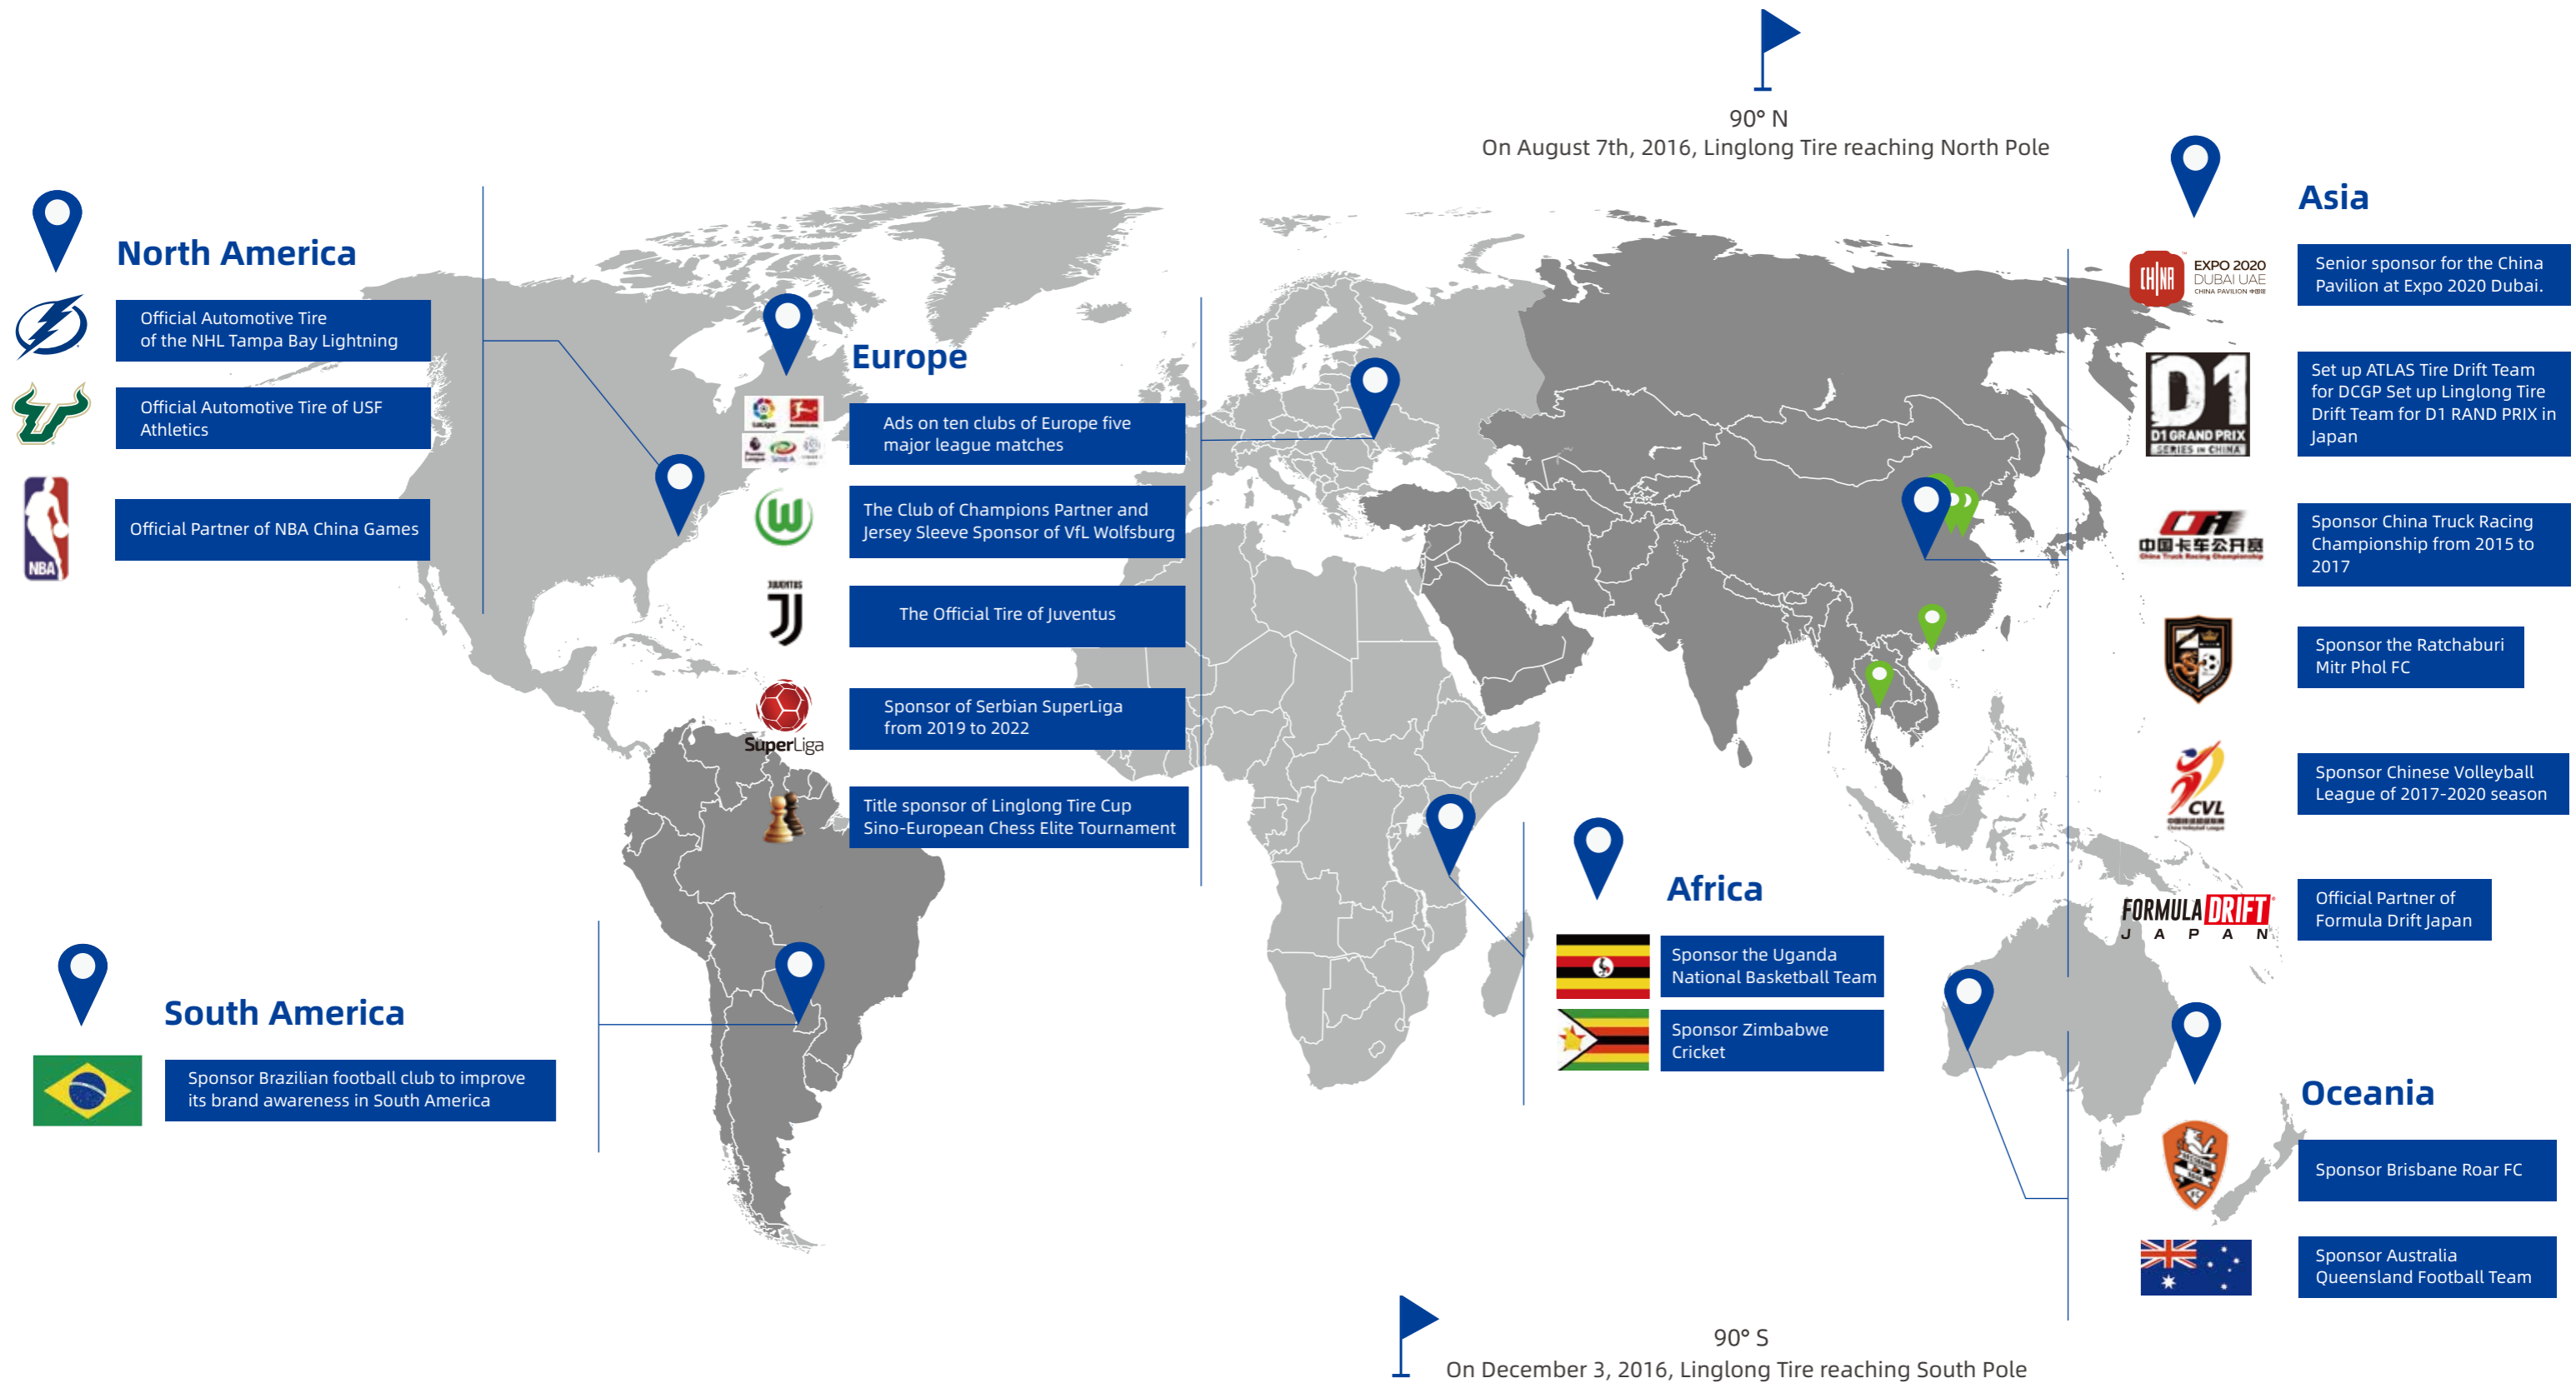

# ABUNDANT SPORTS MARKETING SPONSORSHIP



Linglong Sponsored NBA China Games



Linglong Tire Drift Team Orange won the Japan D1 Grand Prix Chase Championship



Juventus football club stadium advertisement



Sponsored national volleyball supper league



Global Club of Champions Top Partner of VfL Wolfsburg and Official Jersey Sleeve Partner



Linglong Sponsored Tampa Bay Lightning



Linglong Sponsored Serbian SuperLiga

Linglong adopts many sponsor activities to enlarge Linglong Tire's influence in domestic and foreign automobile industry. From 2007 to 2016, Linglong organized the Women's Racing Team of Linglong Tire, and participated in China Rally Championship many times; Linglong became the sponsor of Uganda National Basketball Team and put ads on Europe five major league matches. It became the club of Champions Partner and Jersey Sleeve Sponsor of VfL Wolfsburg as well as Official Tire Partner of Juventus on 2018-2021 season, which set off a new round football marketing craze for national brand. Besides, Linglong is the title sponsor of 2015-2017 China Truck Racing Championship, 2016 China Grand Rally, the sponsor of Chinese Volleyball League of 2017-2020 season, and set up ATLAS Drifting Team in 2018, using independently researched and developed racing tire to participate in D1 GRAND PRIX in Japan and China. The company sponsored Serbian SuperLiga from 2019 to 2022 and became the Official Automotive Tire of the NHL Tampa Bay Lightning from 2019 to 2020.



## Witness the Opening of Expo 2020 Dubai China Pavilion with Linglong Tire

Linglong Tire with 2020 World Expo

### Professional Authoritative Large Outdoor Comprehensive Tire Proving Ground

The Sino-Asia Tire Proving Ground is invested by Linglong Group, designed and constructed by a top international professional team. The total investment is nearly RMB 1.3 billion yuan. It builds 17 kinds of tire test tracks including wet handling road, wet ring, fatigue endurance road, NVH and comfort road, multi-functional platform and test mountain, off-road road, etc., covering the tire test of passenger vehicle, light trucks, heavy-duty trucks and buses , it can conduct field monitoring and indoor tests on more than 40 performance indicators such as tire handling, economy and comfort.



# INTERNATIONALIZATION OF R&D

T1, the asphalt concrete high-speed runway with the largest inclination in the world



T10, wet circular loop

T9, the first wet control road in China



# PASSENGER CAR TIRE



## SPORT MASTER

NEW PRODUCT

### ULTRA HIGH PERFORMANCE

- FBU Technology--Update the Wet performance;
- VSG Technology--improve the handling performance;
- BPT Technology--improve the actual contact area for better the handling performance.

| RIM          | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (Kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|--------------|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 16           | 185/55R16 XL | 87         | V             | 6J           | 545                | 290                     | 610                   | 194                | 6.5              |
|              | 195/45R16 XL | 84         | V             | 6 1/2J       | 500                | 290                     | 582                   | 195                | 6.5              |
|              | 205/45R16 XL | 87         | Y             | 7J           | 545                | 290                     | 590                   | 206                | 6.5              |
|              | 205/50R16 XL | 91         | Y             | 6 1/2J       | 615                | 290                     | 612                   | 214                | 6.5              |
|              | 205/55R16    | 91         | V             | 6 1/2J       | 615                | 250                     | 632                   | 214                | 7.1              |
|              | 205/55R16 XL | 94         | Y             | 6 1/2J       | 670                | 290                     | 632                   | 214                | 7.1              |
|              | 215/40R16 XL | 86         | Y             | 7 1/2J       | 530                | 290                     | 578                   | 218                | 6.5              |
|              | 215/45R16 XL | 90         | Y             | 7J           | 600                | 290                     | 600                   | 213                | 6.5              |
| 225/55R16 XL | 99           | Y          | 7J            | 775          | 290                | 654                     | 233                   | 6.5                |                  |
| 17           | 195/45R17 XL | 85         | W             | 6 1/2J       | 515                | 290                     | 608                   | 195                | 6.5              |
|              | 205/40R17 XL | 84         | Y             | 7 1/2J       | 500                | 290                     | 596                   | 212                | 6.5              |
|              | 205/45R17 XL | 88         | Y             | 7J           | 560                | 290                     | 616                   | 206                | 6.5              |
|              | 205/50R17 XL | 93         | Y             | 6 1/2J       | 650                | 290                     | 638                   | 214                | 6.5              |
|              | 215/40R17 XL | 87         | Y             | 7 1/2J       | 545                | 290                     | 604                   | 218                | 6.5              |
|              | 215/45R17 XL | 91         | Y             | 7J           | 615                | 290                     | 626                   | 213                | 6.5              |
|              | 215/50R17 XL | 95         | Y             | 7J           | 690                | 290                     | 648                   | 226                | 6.5              |
|              | 215/55R17 XL | 98         | Y             | 7J           | 750                | 290                     | 668                   | 226                | 6.5              |
|              | 225/45R17 XL | 94         | Y             | 7 1/2J       | 670                | 290                     | 634                   | 225                | 7.1              |
|              | 225/50R17 XL | 98         | Y             | 7J           | 750                | 290                     | 658                   | 233                | 6.7              |
|              | 225/55R17 XL | 101        | Y             | 7J           | 825                | 290                     | 680                   | 233                | 6.5              |
|              | 235/45R17 XL | 97         | Y             | 8J           | 730                | 290                     | 644                   | 236                | 6.9              |
| 235/50R17 XL | 100          | Y          | 7 1/2J        | 800          | 290                | 668                     | 245                   | 6.9                |                  |
| 245/40R17 XL | 95           | Y          | 8 1/2J        | 690          | 290                | 628                     | 248                   | 6.9                |                  |
| 245/45R17 XL | 99           | Y          | 8J            | 775          | 290                | 652                     | 243                   | 6.9                |                  |
| 18           | 225/40R18 XL | 92         | Y             | 8J           | 630                | 290                     | 637                   | 230                | 6.5              |
|              | 225/45R18 XL | 95         | Y             | 7 1/2J       | 690                | 290                     | 659                   | 225                | 6.5              |
|              | 235/40R18 XL | 95         | Y             | 8 1/2J       | 690                | 290                     | 645                   | 241                | 6.9              |
|              | 235/45R18 XL | 98         | Y             | 8J           | 750                | 290                     | 669                   | 236                | 7.1              |
|              | 235/50R18 XL | 101        | Y             | 7 1/2J       | 825                | 290                     | 693                   | 245                | 6.9              |
|              | 245/40R18 XL | 97         | Y             | 8 1/2J       | 730                | 290                     | 653                   | 248                | 6.9              |
|              | 245/45R18 XL | 100        | Y             | 8J           | 800                | 290                     | 677                   | 243                | 6.9              |
|              | 255/35R18 XL | 94         | Y             | 9J           | 670                | 290                     | 635                   | 260                | 6.9              |
|              | 255/45R18 XL | 103        | Y             | 8 1/2J       | 875                | 290                     | 687                   | 255                | 6.9              |
|              | 265/35R18 XL | 97         | Y             | 9 1/2J       | 730                | 290                     | 643                   | 271                | 6.9              |
| 19           | 225/35R19 XL | 88         | W             | 8J           | 560                | 290                     | 641                   | 230                | 7.1              |
|              | 225/35R19 XL | 88         | Y             | 8J           | 560                | 290                     | 641                   | 230                | 7.1              |
|              | 225/40R19 XL | 93         | Y             | 8J           | 650                | 290                     | 663                   | 230                | 6.5              |
|              | 225/45R19 XL | 96         | Y             | 7 1/2J       | 710                | 290                     | 685                   | 225                | 6.5              |
|              | 235/35R19 XL | 91         | Y             | 8 1/2J       | 615                | 290                     | 647                   | 241                | 6.9              |
|              | 235/40R19 XL | 96         | Y             | 8 1/2J       | 710                | 290                     | 671                   | 241                | 6.9              |
|              | 225/55R19 XL | 103        | Y             | 7J           | 875                | 290                     | 731                   | 233                | 6.5              |
|              | 235/50R19 XL | 103        | Y             | 7 1/2J       | 875                | 290                     | 719                   | 245                | 6.9              |
|              | 245/35R19 XL | 93         | Y             | 8 1/2J       | 650                | 290                     | 655                   | 248                | 7.1              |
|              | 245/40R19 XL | 98         | Y             | 8 1/2J       | 750                | 290                     | 679                   | 248                | 6.9              |
|              | 245/45R19 XL | 102        | Y             | 8J           | 850                | 290                     | 703                   | 243                | 6.9              |
|              | 255/30R19 XL | 91         | Y             | 9J           | 615                | 290                     | 637                   | 260                | 6.9              |
| 255/35R19 XL | 96           | Y          | 9J            | 710          | 290                | 661                     | 260                   | 6.9                |                  |
| 275/40R19 XL | 105          | Y          | 9 1/2J        | 925          | 290                | 703                     | 278                   | 6.9                |                  |
| 20           | 215/30R20 XL | 82         | W             | 7 1/2J       | 475                | 290                     | 638                   | 218                | 7.1              |
|              | 245/35R20 XL | 95         | Y             | 8 1/2J       | 690                | 290                     | 680                   | 248                | 6.9              |
|              | 245/40R20 XL | 99         | Y             | 8 1/2J       | 775                | 290                     | 704                   | 248                | 6.5              |
|              | 255/35R20 XL | 97         | Y             | 9J           | 730                | 290                     | 686                   | 260                | 6.9              |
|              | 265/30R20 XL | 94         | Y             | 9 1/2J       | 670                | 290                     | 668                   | 271                | 6.9              |
|              | 275/35R20 XL | 102        | Y             | 9 1/2J       | 850                | 290                     | 700                   | 278                | 6.9              |
|              | 315/35R20 XL | 110        | Y             | 11J          | 1060               | 290                     | 728                   | 320                | 6.9              |
| 21           | 245/35R21 XL | 96         | Y             | 8 1/2J       | 710                | 290                     | 705                   | 248                | 6.9              |
|              | 295/35R21 XL | 107        | Y             | 10 1/2J      | 975                | 290                     | 739                   | 301                | 6.9              |
|              | 255/35R22 XL | 99         | Y             | 9J           | 775                | 290                     | 737                   | 260                | 6.9              |
| 22           | 265/30R22 XL | 97         | Y             | 9 1/2J       | 730                | 290                     | 719                   | 271                | 6.9              |
|              | 285/35R22 XL | 106        | Y             | 10J          | 950                | 290                     | 759                   | 290                | 6.9              |



# SPORT MASTER LRS



ULTRA HIGH PERFORMANCE

- FBU Technology--Update the Wet performance;
- VSG Technology--improve the handling performance;
- BPT Technology--improve the acture contact area for better the handling performance.

Run-flat tire

| RIM | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (Kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 18  | 225/50R18    | 95         | W             | 7J           | 690                | 250                     | 683                   | 233                | 6.8              |
|     | 235/50R18    | 97         | W             | 7 1/2J       | 730                | 250                     | 693                   | 245                | 6.8              |
| 19  | 245/50R19    | 101        | W             | 7 1/2J       | 825                | 250                     | 729                   | 253                | 6.8              |
| 20  | 275/50R20    | 109        | W             | 8 1/2J       | 1030               | 250                     | 784                   | 284                | 6.8              |
|     | 285/45R20    | 108        | W             | 9 1/2J       | 1000               | 250                     | 764                   | 285                | 6.8              |
|     | 295/45R20    | 110        | W             | 10J          | 1060               | 250                     | 774                   | 296                | 6.8              |
| 21  | 255/50R21    | 106        | W             | 8J           | 950                | 250                     | 789                   | 265                | 6.8              |
|     | 275/40R21 XL | 107        | W             | 9 1/2J       | 975                | 290                     | 753                   | 278                | 6.8              |
|     | 285/35R21    | 101        | W             | 10J          | 825                | 250                     | 733                   | 290                | 6.8              |
|     | 285/45R21    | 109        | W             | 9 1/2J       | 1030               | 250                     | 789                   | 285                | 6.8              |
|     | 315/35R21 XL | 111        | W             | 11J          | 1090               | 290                     | 753                   | 320                | 6.8              |
|     | 325/30R21    | 104        | W             | 11 1/2J      | 900                | 250                     | 729                   | 331                | 6.8              |

COMING SOON



# COMFORT MASTER



HP TIRE WITH GOOD HANDLING PERFORMANCE AND LOW NOISE

- Comfortable and quiet ride;
- Low rolling resistance for better fuel efficiency;
- Enhanced wet grip to effectively reduce risk of hydroplaning.

| RIM          | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (Kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|--------------|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 13           | 145/70R13    | 71         | T             | 4.50B        | 345                | 250                     | 534                   | 150                | 5.7              |
|              | 155/70R13    | 75         | T             | 4.50B        | 387                | 250                     | 548                   | 157                | 6.2              |
|              | 155/80R13    | 79         | T             | 4.50B        | 437                | 240                     | 578                   | 157                | 6.2              |
| 14           | 155/65R14    | 75         | T             | 4 1/2J       | 387                | 250                     | 558                   | 157                | 6.2              |
|              | 155/65R14    | 75         | H             | 4 1/2J       | 387                | 250                     | 558                   | 157                | 6.2              |
|              | 165/60R14    | 75         | H             | 5J           | 387                | 250                     | 554                   | 170                | 6.2              |
|              | 165/65R14    | 79         | H             | 5J           | 437                | 250                     | 570                   | 170                | 6.2              |
|              | 165/65R14    | 79         | T             | 5J           | 437                | 250                     | 570                   | 170                | 6.2              |
|              | 165/70R14    | 81         | T             | 5J           | 462                | 250                     | 588                   | 170                | 6.2              |
|              | 165/70R14 XL | 85         | T             | 5J           | 515                | 290                     | 588                   | 170                | 6.2              |
|              | 175/60R14    | 79         | H             | 5J           | 437                | 250                     | 566                   | 177                | 6.2              |
|              | 175/65R14    | 82         | T             | 5J           | 475                | 250                     | 584                   | 177                | 6.2              |
|              | 175/65R14    | 82         | H             | 5J           | 475                | 250                     | 584                   | 177                | 6.2              |
|              | 175/65R14 XL | 86         | T             | 5J           | 530                | 290                     | 584                   | 177                | 6.2              |
|              | 175/70R14    | 84         | T             | 5J           | 500                | 250                     | 602                   | 177                | 6.2              |
| 175/70R14 XL | 88           | T          | 5J            | 560          | 290                | 602                     | 177                   | 6.2                |                  |
| 15           | 145/65R15    | 72         | T             | 4 1/2J       | 355                | 250                     | 569                   | 150                | 6.2              |
|              | 155/60R15    | 74         | T             | 4 1/2J       | 375                | 250                     | 567                   | 157                | 6.2              |
|              | 165/55R15    | 75         | V             | 5J           | 387                | 250                     | 563                   | 170                | 6.2              |
|              | 165/60R15    | 77         | H             | 5J           | 412                | 250                     | 579                   | 170                | 6.2              |
|              | 165/60R15    | 77         | T             | 5J           | 412                | 250                     | 579                   | 170                | 6.2              |
|              | 165/65R15    | 81         | H             | 5J           | 462                | 250                     | 595                   | 170                | 6.2              |
|              | 165/65R15    | 81         | T             | 5J           | 462                | 250                     | 595                   | 170                | 6.2              |
|              | 175/55R15    | 77         | T             | 5 1/2J       | 412                | 250                     | 573                   | 182                | 6.2              |
|              | 175/60R15    | 81         | H             | 5J           | 462                | 250                     | 591                   | 177                | 6.2              |
|              | 175/60R15    | 81         | V             | 5J           | 462                | 250                     | 591                   | 177                | 6.2              |
| 16           | 175/60R16    | 82         | H             | 5J           | 475                | 250                     | 616                   | 177                | 6.2              |

Three Grooves

| RIM          | Size      | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (Kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|--------------|-----------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 14           | 185/55R14 | 80         | H             | 6J           | 450                | 250                     | 560                   | 194                | 6.7              |
|              | 185/60R14 | 82         | T             | 5 1/2J       | 475                | 250                     | 578                   | 189                | 6.7              |
|              | 185/60R14 | 82         | H             | 5 1/2J       | 475                | 250                     | 578                   | 189                | 6.7              |
|              | 185/65R14 | 86         | H             | 5 1/2J       | 530                | 250                     | 596                   | 189                | 6.7              |
|              | 185/65R14 | 86         | T             | 5 1/2J       | 530                | 250                     | 596                   | 189                | 6.7              |
|              | 185/70R14 | 88         | T             | 5 1/2J       | 560                | 250                     | 616                   | 189                | 6.7              |
|              | 195/60R14 | 86         | H             | 6J           | 530                | 250                     | 590                   | 201                | 6.7              |
|              | 195/65R14 | 89         | H             | 6J           | 580                | 250                     | 610                   | 201                | 6.7              |
|              | 205/70R14 | 94         | T             | 6J           | 670                | 250                     | 644                   | 209                | 6.7              |
|              | 185/55R15 | 82         | V             | 6J           | 475                | 250                     | 585                   | 194                | 6.7              |
| 185/55R15    | 82        | H          | 6J            | 475          | 250                | 585                     | 194                   | 6.7                |                  |
| 185/60R15    | 84        | H          | 5 1/2J        | 500          | 250                | 603                     | 189                   | 6.7                |                  |
| 185/60R15    | 84        | T          | 5 1/2J        | 500          | 250                | 603                     | 189                   | 6.7                |                  |
| 185/60R15 XL | 88        | H          | 5 1/2J        | 560          | 290                | 603                     | 189                   | 6.7                |                  |
| 185/65R15    | 88        | H          | 5 1/2J        | 560          | 250                | 621                     | 189                   | 6.7                |                  |
| 185/65R15    | 88        | T          | 5 1/2J        | 560          | 250                | 621                     | 189                   | 6.7                |                  |
| 185/65R15 XL | 92        | T          | 5 1/2J        | 630          | 290                | 621                     | 189                   | 6.7                |                  |
| 195/65R15 XL | 95        | H          | 6J            | 690          | 290                | 635                     | 201                   | 6.7                |                  |
| 195/50R15    | 82        | V          | 6J            | 475          | 250                | 577                     | 201                   | 6.7                |                  |
| 195/55R15    | 85        | H          | 6J            | 515          | 250                | 595                     | 201                   | 6.7                |                  |
| 195/55R15    | 85        | V          | 6J            | 515          | 250                | 595                     | 201                   | 6.7                |                  |
| 195/60R15    | 88        | H          | 6J            | 560          | 250                | 615                     | 201                   | 6.7                |                  |
| 195/60R15    | 88        | V          | 6J            | 560          | 250                | 615                     | 201                   | 6.7                |                  |
| 195/65R15    | 91        | H          | 6J            | 615          | 250                | 635                     | 201                   | 6.7                |                  |
| 195/65R15    | 91        | T          | 6J            | 615          | 250                | 635                     | 201                   | 6.7                |                  |
| 195/65R15    | 91        | V          | 6J            | 615          | 250                | 635                     | 201                   | 6.7                |                  |
| 195/65R15 XL | 95        | T          | 6J            | 615          | 250                | 635                     | 201                   | 6.7                |                  |
| 205/50R15    | 86        | V          | 6 1/2J        | 530          | 250                | 587                     | 214                   | 6.7                |                  |
| 205/55R15    | 88        | V          | 6 1/2J        | 560          | 250                | 607                     | 214                   | 6.7                |                  |
| 205/60R15    | 91        | H          | 6J            | 615          | 250                | 627                     | 209                   | 6.7                |                  |
| 205/65R15    | 94        | H          | 6J            | 670          | 250                | 647                     | 209                   | 6.7                |                  |
| 205/65R15    | 94        | V          | 6J            | 670          | 250                | 647                     | 209                   | 6.7                |                  |
| 205/60R15    | 91        | V          | 6J            | 615          | 250                | 627                     | 209                   | 6.7                |                  |
| 205/70R15    | 96        | T          | 6J            | 710          | 250                | 669                     | 209                   | 6.7                |                  |
| 215/60R15    | 94        | H          | 6 1/2J        | 670          | 250                | 639                     | 221                   | 6.7                |                  |
| 185/50R16    | 81        | V          | 6J            | 462          | 250                | 592                     | 202                   | 6.7                |                  |
| 185/55R16    | 83        | V          | 6J            | 487          | 250                | 610                     | 194                   | 6.7                |                  |
| 195/50R16    | 84        | V          | 6J            | 500          | 250                | 602                     | 201                   | 6.7                |                  |
| 195/50R16 XL | 88        | V          | 6J            | 560          | 290                | 602                     | 201                   | 6.7                |                  |
| 195/55R16    | 87        | H          | 6J            | 545          | 250                | 620                     | 201                   | 6.7                |                  |
| 195/55R16    | 87        | V          | 6J            | 545          | 250                | 620                     | 201                   | 6.7                |                  |
| 195/55R16 XL | 91        | V          | 6J            | 615          | 290                | 620                     | 201                   | 6.7                |                  |
| 195/60R16    | 89        | H          | 6J            | 580          | 250                | 640                     | 201                   | 6.65               |                  |
| 195/60R16    | 89        | V          | 6J            | 580          | 250                | 640                     | 201                   | 6.65               |                  |
| 195/65R16    | 92        | H          | 6J            | 630          | 250                | 660                     | 201                   | 6.7                |                  |
| 205/50R16    | 87        | H          | 6 1/2J        | 545          | 250                | 612                     | 214                   | 6.7                |                  |
| 205/50R16    | 87        | V          | 6 1/2J        | 545          | 250                | 612                     | 214                   | 6.7                |                  |
| 205/55R16    | 91        | V          | 6 1/2J        | 615          | 250                | 632                     | 214                   | 6.5                |                  |
| 205/60R16    | 92        | H          | 6J            | 630          | 250                | 652                     | 209                   | 6.8                |                  |
| 205/60R16    | 92        | V          | 6J            | 630          | 250                | 652                     | 209                   | 6.7                |                  |
| 205/60R16 XL | 96        | V          | 6J            | 710          | 290                | 652                     | 209                   | 6.7                |                  |
| 205/65R16    | 95        | H          | 6J            | 690          | 250                | 672                     | 209                   | 6.7                |                  |
| 215/55R16    | 93        | V          | 7J            | 650          | 250                | 642                     | 226                   | 6.7                |                  |
| 215/60R16    | 95        | H          | 6 1/2J        | 690          | 250                | 664                     | 221                   | 6.7                |                  |
| 215/60R16    | 95        | V          | 6 1/2J        | 690          | 250                | 664                     | 221                   | 6.7                |                  |
| 215/60R16 XL | 99        | V          | 6 1/2J        | 775          | 290                | 664                     | 221                   | 6.7                |                  |
| 215/60R16 XL | 99        | H          | 6 1/2J        | 775          | 290                | 664                     | 221                   | 6.7                |                  |
| 215/65R16    | 98        | H          | 6 1/2J        | 750          | 250                | 686                     | 221                   | 6.7                |                  |
| 225/50R16    | 92        | V          | 7J            | 630          | 250                | 632                     | 233                   | 7                  |                  |
| 225/55R16 XL | 99        | H          | 7J            | 775          | 290                | 654                     | 233                   | 6.9                |                  |
| 225/55R16 XL | 99        | V          | 7J            | 775          | 290                | 654                     | 233                   | 6.9                |                  |
| 225/60R16    | 98        | V          | 6 1/2J        | 750          | 250                | 676                     | 228                   | 7                  |                  |
| 225/70R16    | 103       | H          | 6 1/2J        | 875          | 250                | 722                     | 228                   | 7                  |                  |
| 235/60R16    | 100       | H          | 7J            | 800          | 250                | 688                     | 240                   | 7.4                |                  |
| 255/70R16 XL | 115       | H          | 7 1/2J        | 1215         | 290                | 764                     | 260                   | 7.9                |                  |
| 195/60R17    | 90        | H          | 6J            | 600          | 250                | 666                     | 201                   | 6.7                |                  |
| 205/50R17 XL | 93        | V          | 6 1/2J        | 650          | 290                | 638                     | 214                   | 6.7                |                  |
| 205/55R17 XL | 95        | V          | 6 1/2J        | 690          | 290                | 658                     | 214                   | 6.7                |                  |
| 215/50R17 XL | 95        | V          | 7J            | 690          | 290                | 648                     | 226                   | 6.7                |                  |
| 215/55R17    | 94        | V          | 7J            | 670          | 250                | 668                     | 226                   | 6.7                |                  |
| 215/60R17    | 96        | H          | 6 1/2J        | 710          | 250                | 690                     | 221                   | 6.7                |                  |
| 225/50R17    | 94        | V          | 7J            | 670          | 250                | 658                     | 233                   | 7                  |                  |
| 225/50R17 XL | 98        | V          | 7J            | 750          | 290                | 658                     | 233                   | 7                  |                  |
| 225/60R17    | 99        | H          | 6 1/2J        | 775          | 250                | 702                     | 228                   | 7                  |                  |
| 225/60R17    | 99        | V          | 6 1/2J        | 775          | 250                | 702                     | 228                   | 7                  |                  |
| 225/65R17    | 102       | H          | 6 1/2J        | 850          | 250                | 724                     | 228                   | 7                  |                  |
| 235/55R17    | 99        | V          | 7 1/2J        | 775          | 250                | 690                     | 245                   | 7.5                |                  |
| 235/60R17    | 102       | H          | 7J            | 850          | 250                | 714                     | 240                   | 7.4                |                  |

Four Grooves



Run-flat tire

# GREEN-Max ACRO LRS

SUPER ABILITY RUN-FLAT TIRE

- Asymmetric tread pattern design provides more stable driving and riding;
- Big shoulder blocks to effectively improve handling performance.
- Carry linglong LRS run-flat technology, for the safety of the vehicle driving escort.

| RIM | Size          | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|---------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 16  | 225/55RF16    | 95         | W             | 7J           | 690                | 250                     | 654                   | 233                | 7.0              |
| 17  | 225/45RF17    | 91         | W             | 7 1/2J       | 615                | 250                     | 634                   | 225                | 7.0              |
|     | 225/50RF17    | 94         | W             | 7J           | 670                | 250                     | 658                   | 233                | 7.5              |
| 18  | 225/55RF17    | 97         | W             | 7J           | 730                | 250                     | 680                   | 233                | 7.0              |
|     | 225/45RF18    | 91         | W             | 7 1/2J       | 615                | 250                     | 659                   | 225                | 7.0              |
|     | 245/40RF18    | 93         | W             | 8 1/2J       | 650                | 250                     | 653                   | 248                | 7.0              |
|     | 245/45RF18    | 96         | W             | 8J           | 710                | 250                     | 677                   | 243                | 7.0              |
|     | 245/50RF18    | 100        | W             | 7 1/2J       | 800                | 250                     | 703                   | 253                | 7.0              |
| 19  | 255/55RF18    | 105        | W             | 8J           | 925                | 250                     | 737                   | 265                | 7.0              |
|     | 225/40RF19    | 89         | W             | 8J           | 580                | 250                     | 663                   | 230                | 7.0              |
|     | 245/40RF19    | 94         | W             | 8 1/2J       | 670                | 250                     | 679                   | 248                | 7.0              |
|     | 245/45RF19    | 98         | W             | 8J           | 750                | 250                     | 703                   | 243                | 7.0              |
|     | 255/35RF19    | 92         | Y             | 9J           | 630                | 250                     | 661                   | 260                | 7.0              |
|     | 255/50RF19    | 103        | W             | 8J           | 875                | 250                     | 739                   | 265                | 7.0              |
|     | 255/55RF19    | 107        | W             | 8J           | 975                | 250                     | 763                   | 265                | 7.0              |
| 20  | 275/35RF19    | 96         | Y             | 9 1/2J       | 710                | 250                     | 675                   | 278                | 7.0              |
|     | 275/40RF19    | 101        | Y             | 9 1/2J       | 825                | 250                     | 703                   | 278                | 7.0              |
|     | 245/40RF20 XL | 99         | Y             | 8 1/2J       | 775                | 290                     | 704                   | 248                | 7.0              |
|     | 275/35RF20 XL | 102        | Y             | 9 1/2J       | 850                | 290                     | 700                   | 278                | 7.0              |
|     | 275/40RF20    | 102        | W             | 9 1/2J       | 850                | 250                     | 728                   | 278                | 7.0              |
|     | 275/45RF20    | 106        | W             | 9J           | 950                | 250                     | 756                   | 273                | 7.0              |
| 20  | 305/40RF20 XL | 112        | Y             | 11J          | 1120               | 290                     | 752                   | 313                | 7.0              |
|     | 315/35RF20 XL | 110        | Y             | 11J          | 1060               | 290                     | 728                   | 320                | 7.0              |



# GREEN-Max ARCO

ULTRA HIGH PERFORMANCE

- Asymmetric tread pattern design for better handling performance and fashionable appearance;
- Big shoulder blocks design, provide extreme steering performance.
- Enhanced wet grip to effectively reduce risk of hydroplaning.

| RIM | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 16  | 215/55R16 XL | 97         | W             | 7J           | 730                | 290                     | 642                   | 226                | 6.3              |
|     | 185/55R16 XL | 87         | W             | 6J           | 545                | 290                     | 610                   | 194                | 6.3              |
|     | 195/45R16 XL | 84         | V             | 6 1/2J       | 500                | 290                     | 582                   | 195                | 6.3              |
|     | 205/55R16 XL | 94         | W             | 6 1/2J       | 670                | 290                     | 632                   | 214                | 6.3              |
|     | 215/55R16 XL | 97         | W             | 7J           | 730                | 290                     | 642                   | 226                | 6.3              |
| 17  | 225/55R16    | 95         | Y             | 7J           | 690                | 250                     | 654                   | 233                | 6.3              |
|     | 195/45R17 XL | 85         | V             | 6 1/2J       | 515                | 290                     | 608                   | 195                | 6.3              |
|     | 205/45R17 XL | 88         | Y             | 7J           | 560                | 290                     | 616                   | 206                | 6.3              |
|     | 205/50R17 XL | 93         | Y             | 6 1/2J       | 650                | 290                     | 638                   | 214                | 6.3              |
|     | 215/45R17 XL | 91         | Y             | 7J           | 615                | 290                     | 626                   | 213                | 6.3              |
|     | 215/50R17 XL | 95         | Y             | 7J           | 690                | 290                     | 648                   | 226                | 6.3              |
|     | 215/55R17    | 94         | Y             | 7J           | 670                | 250                     | 668                   | 226                | 6.3              |
|     | 225/45R17 XL | 94         | Y             | 7 1/2J       | 670                | 290                     | 634                   | 225                | 7.5              |
|     | 225/50R17 XL | 98         | Y             | 7J           | 750                | 290                     | 658                   | 233                | 6.3              |
|     | 235/50R17 XL | 100        | W             | 7 1/2J       | 800                | 290                     | 668                   | 245                | 7                |
| 18  | 255/45R17 XL | 102        | W             | 8 1/2J       | 850                | 290                     | 662                   | 255                | 7                |
|     | 215/45R18 XL | 93         | W             | 7J           | 650                | 290                     | 651                   | 213                | 7                |
|     | 225/40R18 XL | 92         | Y             | 8J           | 630                | 290                     | 637                   | 230                | 6.3              |
|     | 225/45R18 XL | 95         | Y             | 7 1/2J       | 690                | 290                     | 659                   | 225                | 6.3              |
|     | 235/45R18 XL | 98         | W             | 8J           | 750                | 290                     | 669                   | 236                | 7                |
|     | 245/40R18 XL | 97         | Y             | 8 1/2J       | 730                | 290                     | 653                   | 248                | 6.8              |
|     | 275/45R18 XL | 107        | W             | 9J           | 975                | 290                     | 705                   | 273                | 7                |
| 19  | 225/40R19 XL | 93         | Y             | 8J           | 650                | 290                     | 663                   | 230                | 6.3              |
|     | 225/45R19 XL | 96         | W             | 7 1/2J       | 710                | 290                     | 685                   | 225                | 7                |
|     | 225/55R19 XL | 103        | Y             | 7J           | 875                | 290                     | 731                   | 233                | 6.8              |
|     | 235/35R19 XL | 91         | Y             | 8 1/2J       | 615                | 290                     | 647                   | 241                | 6.8              |
|     | 235/40R19 XL | 96         | Y             | 8 1/2J       | 710                | 290                     | 671                   | 241                | 6.8              |
|     | 235/50R19 XL | 103        | Y             | 7 1/2J       | 875                | 290                     | 719                   | 245                | 6.8              |
|     | 255/30R19 XL | 91         | Y             | 9J           | 615                | 290                     | 637                   | 260                | 6.8              |
|     | 255/35R19 XL | 96         | Y             | 9J           | 710                | 290                     | 661                   | 260                | 6.8              |
|     | 255/40R19 XL | 100        | W             | 9J           | 800                | 290                     | 687                   | 260                | 7                |
|     | 255/45R19 XL | 104        | W             | 8 1/2J       | 900                | 290                     | 713                   | 255                | 7                |
| 20  | 275/40R19 XL | 105        | Y             | 9 1/2J       | 925                | 290                     | 703                   | 278                | 6.8              |
|     | 245/45R20 XL | 103        | W             | 8J           | 875                | 290                     | 728                   | 243                | 7                |
|     | 255/35R20 XL | 97         | Y             | 9J           | 730                | 290                     | 686                   | 260                | 6.8              |
|     | 255/45R20 XL | 105        | W             | 8 1/2J       | 925                | 290                     | 738                   | 255                | 7                |
|     | 265/30R20 XL | 94         | Y             | 9 1/2J       | 670                | 290                     | 668                   | 271                | 6.8              |
|     | 275/35R20 XL | 102        | Y             | 9 1/2J       | 850                | 290                     | 700                   | 278                | 6.8              |
|     | 315/35R20 XL | 110        | W             | 11J          | 1060               | 290                     | 728                   | 320                | 6.8              |
| 21  | 295/35R21 XL | 107        | W             | 10 1/2J      | 975                | 290                     | 739                   | 301                | 6.8              |



# GREEN-Max

UHP TIRE WITH EXCELLENT WET GRIP AND LOW NOISE

- Excellent handling performance;
- Improved drainage performance to effectively reduce risk of hydroplaning;
- Superior driving stability;
- Comfortable ride;
- Designed to fit premium cars and sports cars.

| RIM           | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|---------------|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 15            | 185/45R15    | 75         | V             | 6J           | 387                | 250                     | 547                   | 183                | 7.5              |
|               | 195/45R15    | 78         | V             | 6 1/2J       | 425                | 250                     | 557                   | 195                | 6.8              |
| 16            | 195/45R16 XL | 84         | V             | 6 1/2J       | 500                | 290                     | 582                   | 195                | 7.6              |
|               | 205/45R16 XL | 87         | W             | 7J           | 545                | 290                     | 590                   | 206                | 7.6              |
|               | 205/50R16    | 87         | W             | 6 1/2J       | 545                | 250                     | 612                   | 214                | 7.6              |
|               | 205/50R16    | 87         | V             | 6 1/2J       | 545                | 250                     | 612                   | 214                | 7.6              |
|               | 205/55R16 XL | 94         | W             | 6 1/2J       | 670                | 290                     | 632                   | 214                | 7.6              |
|               | 215/40R16 XL | 86         | W             | 7 1/2J       | 530                | 290                     | 578                   | 218                | 7.6              |
|               | 215/45R16 XL | 90         | V             | 7J           | 600                | 290                     | 600                   | 213                | 7.3              |
|               | 215/55R16 XL | 97         | W             | 7J           | 730                | 290                     | 642                   | 226                | 7.6              |
|               | 225/50R16 XL | 96         | V             | 7J           | 710                | 290                     | 632                   | 233                | 7.6              |
|               | 225/55R16    | 95         | V             | 7J           | 690                | 250                     | 654                   | 233                | 7.5              |
| 17            | 185/35R17 XL | 82         | V             | 6 1/2J       | 475                | 290                     | 562                   | 188                | 7.5              |
|               | 195/40R17 XL | 81         | V             | 8J           | 462                | 290                     | 588                   | 200                | 7.5              |
|               | 205/40R17 XL | 84         | W             | 7 1/2J       | 500                | 290                     | 596                   | 212                | 7.6              |
|               | 205/45R17 XL | 88         | W             | 7J           | 560                | 290                     | 616                   | 206                | 7.6              |
|               | 205/45R17 XL | 88         | V             | 7J           | 560                | 290                     | 616                   | 206                | 7.6              |
|               | 205/50R17 XL | 93         | W             | 6 1/2J       | 650                | 290                     | 638                   | 214                | 7.6              |
|               | 215/40R17 XL | 87         | W             | 7 1/2J       | 545                | 290                     | 604                   | 218                | 7.6              |
|               | 215/45R17 XL | 91         | W             | 7J           | 615                | 290                     | 626                   | 213                | 7.6              |
|               | 215/50R17 XL | 95         | V             | 7J           | 690                | 290                     | 648                   | 226                | 7.5              |
|               | 215/50R17 XL | 95         | W             | 7J           | 690                | 290                     | 648                   | 226                | 7.5              |
|               | 215/55R17    | 94         | V             | 7J           | 670                | 250                     | 668                   | 226                | 7.5              |
|               | 215/55R17 XL | 98         | W             | 7J           | 750                | 290                     | 668                   | 226                | 7.5              |
|               | 225/45R17 XL | 94         | W             | 7 1/2J       | 670                | 290                     | 634                   | 225                | 7.6              |
|               | 225/50R17 XL | 98         | W             | 7J           | 750                | 290                     | 658                   | 233                | 7.6              |
|               | 225/55R17    | 97         | W             | 7J           | 730                | 250                     | 680                   | 233                | 7.6              |
|               | 225/55R17 XL | 101        | W             | 7J           | 825                | 290                     | 680                   | 233                | 7.6              |
| 235/45ZR17 XL | 97           | W          | 8J            | 730          | 290                | 644                     | 236                   | 7.6                |                  |
| 235/50R17     | 96           | Y          | 7 1/2J        | 710          | 250                | 668                     | 245                   | 7.5                |                  |
| 245/40R17     | 91           | W          | 8 1/2J        | 615          | 250                | 628                     | 248                   | 7.5                |                  |
| 245/45R17 XL  | 99           | W          | 8J            | 775          | 290                | 652                     | 243                   | 7.6                |                  |
| 18            | 165/40R18 XL | 85         | V             | 6J           | 515                | 290                     | 589                   | 170                | 6.8              |
|               | 185/35R18    | 81         | H             | 6 1/2J       | 462                | 290                     | 587                   | 186                | 6.8              |
|               | 195/35R18 XL | 88         | W             | 7J           | 560                | 290                     | 594                   | 200                | 6.8              |
|               | 205/35R18 XL | 81         | H             | 7 1/2J       | 462                | 290                     | 601                   | 212                | 6.8              |
|               | 205/40R18 XL | 86         | W             | 7 1/2J       | 530                | 290                     | 621                   | 212                | 6.8              |
|               | 215/35R18 XL | 84         | W             | 7 1/2J       | 500                | 290                     | 607                   | 218                | 7.6              |
|               | 215/40R18 XL | 89         | W             | 7 1/2J       | 580                | 290                     | 629                   | 218                | 7.5              |
|               | 215/45R18 XL | 93         | W             | 7J           | 650                | 290                     | 651                   | 213                | 7.5              |
|               | 225/40R18 XL | 92         | W             | 8J           | 630                | 290                     | 637                   | 230                | 7.6              |
|               | 225/45R18 XL | 95         | W             | 7 1/2J       | 690                | 290                     | 659                   | 225                | 7.6              |
|               | 235/40R18 XL | 95         | W             | 8 1/2J       | 690                | 290                     | 645                   | 241                | 7.6              |
|               | 235/45R18 XL | 98         | Y             | 8J           | 750                | 290                     | 669                   | 236                | 7.3              |
|               | 235/50R18 XL | 101        | W             | 7 1/2J       | 825                | 290                     | 693                   | 245                | 7.6              |
|               | 245/40R18 XL | 97         | W             | 8 1/2J       | 730                | 290                     | 653                   | 248                | 7.6              |
|               | 245/45R18 XL | 100        | W             | 8J           | 800                | 290                     | 677                   | 243                | 7.6              |
|               | 255/35R18 XL | 94         | Y             | 9J           | 670                | 290                     | 635                   | 260                | 7.5              |
| 255/45R18 XL  | 103          | W          | 8 1/2J        | 875          | 290                | 687                     | 255                   | 7.6                |                  |
| 265/35R18 XL  | 97           | Y          | 9 1/2J        | 730          | 290                | 643                     | 271                   | 7.5                |                  |
| 19            | 215/35R19 XL | 85         | W             | 7 1/2J       | 515                | 290                     | 633                   | 218                | 6.8              |
|               | 225/35R19 XL | 88         | W             | 8J           | 560                | 290                     | 641                   | 230                | 7.6              |
|               | 225/45R19 XL | 96         | W             | 7 1/2J       | 710                | 290                     | 685                   | 225                | 7.6              |
|               | 225/50R19 XL | 107        | V             | 7J           | 975                | 290                     | 709                   | 233                | 6.8              |
|               | 225/55R19    | 99         | H             | 7J           | 775                | 250                     | 731                   | 233                | 6.8              |
|               | 235/35R19 XL | 91         | W             | 8 1/2J       | 615                | 290                     | 647                   | 241                | 7.6              |
|               | 235/55R19 XL | 105        | W             | 7 1/2J       | 925                | 290                     | 741                   | 245                | 7.5              |
|               | 245/40R19 XL | 98         | W             | 8 1/2J       | 750                | 290                     | 679                   | 248                | 7.5              |
|               | 245/45R19    | 98         | Y             | 8J           | 750                | 250                     | 703                   | 243                | 7.5              |
| 20            | 265/30R19 XL | 93         | W             | 9 1/2J       | 650                | 290                     | 643                   | 271                | 7.6              |
|               | 215/30R20 XL | 82         | W             | 7 1/2J       | 475                | 290                     | 638                   | 218                | 7.5              |
|               | 225/30R20 XL | 85         | W             | 8J           | 515                | 290                     | 644                   | 230                | 7.5              |
|               | 225/35R20 XL | 90         | Y             | 8J           | 600                | 290                     | 666                   | 230                | 7.5              |
|               | 235/30R20 XL | 88         | Y             | 8 1/2J       | 560                | 290                     | 650                   | 242                | 7.5              |
|               | 245/35R20 XL | 95         | Y             | 8 1/2J       | 690                | 290                     | 680                   | 248                | 7.5              |
| 22            | 245/45R20    | 99         | W             | 8J           | 775                | 250                     | 728                   | 243                | 6.8              |
|               | 265/40R22 XL | 106        | V             | 9 1/2J       | 950                | 290                     | 771                   | 271                | 7.5              |
| 285/40R22 XL  | 110          | V          | 10J           | 1060         | 290                | 787                     | 290                   | 7.5                |                  |



# GREEN-Max HP<sup>010</sup>

HP TIRE WITH GOOD HANDLING PERFORMANCE AND LOW NOISE

- Good straight driving stability;
- Comfortable and quiet ride;
- Low rolling resistance for better fuel efficiency;
- Enhanced wet grip to effectively reduce risk of hydroplaning.

| RIM | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 14  | 165/60R14    | 75         | H             | 5J           | 387                | 250                     | 554                   | 170                | 7.3              |
|     | 165/80R14    | 85         | S             | 4 1/2J       | 515                | 240                     | 620                   | 165                | 7.3              |
|     | 175/65R14    | 82         | H             | 5J           | 475                | 250                     | 584                   | 177                | 7.3              |
|     | 175/65R14 XL | 86         | H             | 5J           | 530                | 290                     | 584                   | 177                | 7.3              |
| 15  | 165/50R15    | 73         | V             | 5J           | 365                | 250                     | 547                   | 170                | 7.4              |
|     | 165/55R15    | 75         | V             | 5J           | 387                | 250                     | 563                   | 170                | 7.3              |
|     | 165/60R15    | 77         | H             | 5J           | 412                | 250                     | 579                   | 170                | 7.3              |
|     | 175/60R15    | 81         | H             | 5J           | 462                | 250                     | 591                   | 177                | 7.3              |
|     | 175/65R15    | 84         | H             | 5J           | 500                | 250                     | 609                   | 177                | 7.3              |
| 16  | 165/45R16 XL | 74         | V             | 5 1/2J       | 375                | 290                     | 554                   | 165                | 7.4              |
| 17  | 165/40R17 XL | 75         | V             | 6J           | 387                | 290                     | 564                   | 170                | 7.4              |

M+S

Three Grooves

| RIM       | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----------|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 14        | 185/55R14    | 80         | H             | 6J           | 450                | 250                     | 560                   | 194                | 7.7              |
|           | 185/60R14    | 82         | H             | 5 1/2J       | 475                | 250                     | 578                   | 189                | 7.7              |
|           | 185/65R14    | 86         | H             | 5 1/2J       | 530                | 250                     | 596                   | 189                | 7.8              |
|           | 195/65R14    | 89         | H             | 6J           | 580                | 250                     | 610                   | 201                | 7.2              |
| 15        | 185/55R15    | 82         | V             | 6J           | 475                | 250                     | 585                   | 194                | 7.7              |
|           | 185/60R15    | 84         | H             | 5 1/2J       | 500                | 250                     | 603                   | 189                | 7.7              |
|           | 185/60R15 XL | 88         | H             | 5 1/2J       | 560                | 290                     | 603                   | 189                | 7.7              |
|           | 185/65R15    | 88         | H             | 5 1/2J       | 560                | 250                     | 621                   | 189                | 7.7              |
|           | 195/50R15    | 82         | V             | 6J           | 475                | 250                     | 577                   | 201                | 7.8              |
|           | 195/55R15    | 85         | V             | 6J           | 515                | 250                     | 595                   | 201                | 7.8              |
|           | 195/60R15    | 88         | H/V           | 6J           | 560                | 250                     | 615                   | 201                | 6.0              |
|           | 195/65R15    | 91         | H/V           | 6J           | 615                | 250                     | 635                   | 201                | 7.8              |
|           | 195/65R15 WW | 91         | H             | 6J           | 615                | 250                     | 635                   | 201                | 7.8              |
|           | 205/55R15    | 88         | V             | 6 1/2J       | 560                | 250                     | 607                   | 214                | 7.2              |
|           | 205/60R15    | 91         | H/V           | 6J           | 615                | 250                     | 627                   | 209                | 7.8              |
|           | 205/65R15    | 94         | H/V           | 6J           | 670                | 250                     | 647                   | 209                | 7.8              |
| 16        | 215/65R15 XL | 100        | H             | 6 1/2J       | 800                | 290                     | 661                   | 221                | 7.8              |
|           | 185/50R16    | 81         | H             | 6J           | 462                | 250                     | 592                   | 194                | 7.5              |
|           | 195/50R16 XL | 88         | V             | 6J           | 560                | 290                     | 602                   | 201                | 7.5              |
|           | 195/55R16    | 87         | V             | 6J           | 545                | 250                     | 620                   | 201                | 7.5              |
|           | 195/55R16 XL | 91         | H             | 6J           | 615                | 290                     | 620                   | 201                | 7.7              |
|           | 195/60R16    | 89         | H             | 6J           | 580                | 250                     | 640                   | 201                | 7.5              |
|           | 205/50R16    | 87         | V             | 6 1/2J       | 545                | 250                     | 612                   | 214                | 7.8              |
|           | 205/55R16    | 91         | H/V           | 6 1/2J       | 615                | 250                     | 632                   | 214                | 7.8              |
|           | 205/60R16    | 92         | H/V           | 6J           | 630                | 250                     | 652                   | 209                | 7.8              |
|           | 205/65R16    | 95         | H             | 6J           | 690                | 250                     | 672                   | 209                | 7.8              |
|           | 215/60R16    | 95         | H             | 6 1/2J       | 690                | 250                     | 664                   | 221                | 7.8              |
|           | 215/60R16 XL | 99         | H/V           | 6 1/2J       | 775                | 290                     | 664                   | 221                | 7.7              |
|           | 215/65R16    | 98         | H             | 6 1/2J       | 750                | 250                     | 686                   | 221                | 7.7              |
|           | 225/65R16    | 100        | H             | 6 1/2J       | 800                | 250                     | 698                   | 228                | 8.6              |
|           | 225/70R16    | 103        | H             | 6 1/2J       | 875                | 250                     | 722                   | 228                | 8.6              |
|           | 235/65R16    | 103        | H             | 7J           | 875                | 250                     | 712                   | 240                | 8.2              |
| 255/65R16 | 109          | H          | 7 1/2J        | 1030         | 250                | 738                     | 260                   | 8.1                |                  |
| 17        | 205/55R17 XL | 95         | V             | 6 1/2J       | 690                | 290                     | 658                   | 214                | 7.5              |
|           | 215/60R17    | 96         | H             | 6 1/2J       | 710                | 250                     | 690                   | 221                | 7.8              |
|           | 225/45R17 XL | 94         | H             | 7 1/2J       | 670                | 290                     | 634                   | 225                | 7.7              |
|           | 225/60R17    | 99         | V             | 6 1/2J       | 775                | 250                     | 702                   | 228                | -                |
|           | 225/65R17    | 102        | H             | 6 1/2J       | 850                | 250                     | 724                   | 228                | 8.6              |
| 18        | 215/55R18 XL | 99         | V             | 7J           | 775                | 290                     | 693                   | 226                | -                |
|           | 225/55R18    | 98         | V             | 7J           | 750                | 250                     | 705                   | 233                | -                |

M+S

Four Grooves  
o : In development



# GREEN-Max EcoTouring

## ECO-FRIENDLY TIRE

- Low resistance;
- Low noise;
- Excellent wet performance.

| RIM          | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kpa) | Inflated Pressure (kg) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|--------------|--------------|------------|---------------|--------------|---------------------|------------------------|-----------------------|--------------------|------------------|
| 12           | 145/70R12    | 69         | S             | 4.50B        | 325                 | 250                    | 509                   | 150                | 6.2              |
|              | 155/70R12    | 73         | S             | 4.50B        | 365                 | 250                    | 523                   | 157                | 7.5              |
|              | 175/70R12    | 80         | H             | 5.00B        | 450                 | 250                    | 551                   | 177                | -                |
| 13           | 145/70R13    | 71         | T             | 4.50B        | 345                 | 250                    | 534                   | 150                | 7.3              |
|              | 145/80R13    | 75         | T             | 4.00B        | 387                 | 240                    | 562                   | 145                | 7.1              |
|              | 155/65R13    | 73         | T             | 4.50B        | 365                 | 250                    | 532                   | 157                | 7.3              |
|              | 155/70R13    | 75         | T             | 4.50B        | 387                 | 250                    | 548                   | 157                | 7.3              |
|              | 155/80R13    | 79         | T             | 4.50B        | 437                 | 240                    | 578                   | 157                | 7.3              |
|              | 165/60R13    | 73         | T             | 5.00B        | 365                 | 250                    | 528                   | 170                | -                |
|              | 165/65R13    | 77         | T             | 5.00B        | 412                 | 250                    | 544                   | 170                | 6.0              |
|              | 165/70R13    | 79         | T             | 5.00B        | 437                 | 250                    | 562                   | 170                | 6.0              |
|              | 165/70R13    | 79         | T             | 5.00B        | 437                 | 250                    | 562                   | 170                | 7.3              |
|              | 175/60R13    | 77         | H             | 5.00B        | 412                 | 250                    | 540                   | 177                | 7.3              |
|              | 175/60R13    | 77         | T             | 5.00B        | 412                 | 250                    | 540                   | 177                | 7.3              |
|              | 175/65R13    | 80         | T             | 5.00B        | 450                 | 250                    | 558                   | 177                | 7.3              |
|              | 175/70R13    | 82         | T             | 5.00B        | 475                 | 250                    | 576                   | 177                | 6.0              |
|              | 185/70R13    | 86         | T             | 5.50B        | 530                 | 250                    | 590                   | 189                | 7.3              |
|              | 14           | 155/65R14  | 75            | T            | 4 1/2J              | 387                    | 250                   | 558                | 157              |
| 165/65R14    |              | 79         | T             | 5J           | 437                 | 250                    | 570                   | 170                | 7.3              |
| 165/70R14    |              | 81         | T             | 5J           | 462                 | 250                    | 588                   | 170                | 7.3              |
| 175/65R14    |              | 82         | T             | 5J           | 475                 | 250                    | 584                   | 177                | 6.0              |
| 175/65R14 XL |              | 86         | T             | 5J           | 530                 | 290                    | 584                   | 177                | 6.0              |
| 175/70R14    |              | 84         | T             | 5J           | 500                 | 250                    | 602                   | 177                | 7.3              |
| 175/70R14 XL |              | 88         | T             | 5J           | 560                 | 290                    | 602                   | 177                | 7.3              |
| 185/65R14    |              | 86         | T             | 5 1/2J       | 530                 | 250                    | 596                   | 189                | 7.5              |
| 185/70R14    |              | 88         | T             | 5 1/2J       | 560                 | 250                    | 616                   | 189                | 7.7              |
| 195/70R14    |              | 91         | T             | 6J           | 615                 | 250                    | 630                   | 201                | 7.3              |
| 15           |              | 185/65R15  | 88            | T            | 5 1/2J              | 560                    | 250                   | 621                | 189              |
|              | 185/65R15 XL | 92         | T             | 5 1/2J       | 630                 | 290                    | 621                   | 189                | 7.7              |
|              | 195/50R15    | 82         | H             | 6J           | 475                 | 250                    | 577                   | 201                | -                |
|              | 195/60R15    | 88         | H             | 6J           | 560                 | 250                    | 615                   | 201                | -                |
|              | 195/65R15    | 91         | T             | 6J           | 615                 | 250                    | 635                   | 201                | 6.0              |
|              | 195/65R15 XL | 95         | T             | 6J           | 690                 | 290                    | 635                   | 201                | 6.0              |
|              | 205/60R15    | 91         | H             | 6J           | 615                 | 250                    | 627                   | 209                | -                |
|              | 205/65R15    | 94         | H             | 6J           | 670                 | 250                    | 647                   | 209                | -                |
|              | 205/70R15    | 96         | T             | 6J           | 710                 | 250                    | 669                   | 209                | 7.7              |
|              | 205/75R15    | 97         | S             | 5 1/2J       | 730                 | 250                    | 689                   | 203                | -                |
|              | 215/70R15    | 98         | T             | 6 1/2J       | 750                 | 250                    | 683                   | 221                | -                |
|              | 215/75R15    | 100        | S             | 6J           | 800                 | 250                    | 703                   | 216                | -                |
|              | 225/70R15    | 100        | T             | 6 1/2J       | 800                 | 250                    | 697                   | 228                | -                |
|              | 225/75R15    | 102        | S             | 6J           | 850                 | 250                    | 719                   | 223                | -                |
|              | 235/75R15    | 105        | T             | 6 1/2J       | 925                 | 250                    | 733                   | 235                | 7.9              |
| 16           | 205/55R16    | 91         | H             | 6 1/2J       | 615                 | 250                    | 632                   | 214                | -                |
|              | 205/60R16    | 92         | H             | 6J           | 630                 | 250                    | 652                   | 209                | -                |
|              | 205/65R16    | 95         | H             | 6J           | 690                 | 250                    | 672                   | 209                | -                |
|              | 215/60R16    | 95         | H             | 6 1/2J       | 690                 | 250                    | 664                   | 221                | -                |
|              | 215/65R16    | 98         | H             | 6 1/2J       | 750                 | 250                    | 686                   | 201                | -                |
|              | 215/70R16    | 100        | T             | 6 1/2J       | 800                 | 250                    | 708                   | 221                | -                |
|              | 225/60R16    | 98         | H             | 6 1/2J       | 750                 | 250                    | 676                   | 228                | -                |
|              | 225/65R16    | 100        | H             | 6 1/2J       | 800                 | 250                    | 698                   | 228                | -                |
|              | 225/70R16 XL | 107        | H             | 6 1/2J       | 975                 | 290                    | 722                   | 228                | -                |
|              | 235/70R16    | 106        | H             | 7J           | 950                 | 250                    | 736                   | 240                | -                |
|              | 245/70R16    | 107        | H             | 7J           | 975                 | 250                    | 750                   | 248                | -                |
|              | 245/75R16    | 111        | H             | 7J           | 1090                | 250                    | 774                   | 248                | -                |
|              | 255/70R16    | 111        | S             | 7 1/2J       | 1090                | 250                    | 764                   | 260                | -                |
|              | 265/70R16    | 112        | S             | 8J           | 1120                | 250                    | 778                   | 272                | -                |
|              | 265/75R16    | 116        | T             | 7 1/2J       | 1250                | 250                    | 804                   | 267                | -                |

M+S

Three Grooves  
o : In development

| RIM | Size      | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|-----------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 14  | 205/60R14 | 88         | H             | 6J           | 560                | 250                     | 602                   | 209                | 7.7              |

M+S

Four Grooves



# CrossWind

## ULTRA HIGH PERFORMANCE

- Directional tread pattern design;
- Excellent handling performance;
- Low noise.

| RIM          | Size         | Load Index   | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|--------------|--------------|--------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 13           | 175/50R13 XL | 76           | V             | 5.50B        | 400                | 290                     | 506                   | 182                | 7                |
| 14           | 185/50R14    | 77           | V             | 6J           | 412                | 250                     | 542                   | 194                | 7                |
| 15           | 195/50R15    | 82           | V             | 6J           | 475                | 250                     | 577                   | 201                | 7.5              |
|              | 195/55R15    | 85           | H             | 6J           | 515                | 250                     | 595                   | 201                | 7.5              |
| 16           | 195/45R16 XL | 84           | V             | 6 1/2J       | 500                | 290                     | 582                   | 195                | 7.6              |
|              | 205/45R16 XL | 87           | W             | 7J           | 545                | 290                     | 590                   | 206                | 7.6              |
|              | 205/50R16    | 87           | V/W           | 6 1/2J       | 545                | 250                     | 612                   | 214                | 7.6              |
|              | 205/55R16 XL | 94           | W             | 6 1/2J       | 670                | 290                     | 632                   | 214                | 7.6              |
|              | 215/40R16 XL | 86           | W             | 7 1/2J       | 530                | 290                     | 578                   | 218                | 7.6              |
|              | 215/55R16 XL | 97           | W             | 7J           | 730                | 290                     | 642                   | 226                | 7.6              |
|              | 225/50R16 XL | 96           | V             | 7J           | 710                | 290                     | 632                   | 233                | 7.6              |
|              | 205/40R17 XL | 84           | W             | 7 1/2J       | 500                | 290                     | 596                   | 212                | 7.6              |
| 17           | 205/45R17 XL | 88           | W             | 7J           | 560                | 290                     | 616                   | 206                | 7.6              |
|              | 205/50R17 XL | 93           | W             | 6 1/2J       | 650                | 290                     | 638                   | 214                | 7.6              |
|              | 215/40R17 XL | 87           | W             | 7 1/2J       | 545                | 290                     | 604                   | 218                | 7.6              |
|              | 215/45R17 XL | 91           | W             | 7J           | 615                | 290                     | 626                   | 213                | 7.6              |
|              | 215/50R17    | 91           | V             | 7J           | 615                | 250                     | 648                   | 226                | 7.5              |
|              | 215/50R17 XL | 95           | W             | 7J           | 690                | 290                     | 648                   | 226                | 7.5              |
|              | 215/55R17 XL | 98           | W             | 7J           | 750                | 290                     | 668                   | 226                | 7.6              |
|              | 225/45R17 XL | 94           | W             | 7 1/2J       | 670                | 290                     | 634                   | 225                | 7.6              |
|              | 225/50R17 XL | 98           | W             | 7J           | 750                | 290                     | 658                   | 233                | 7.6              |
|              | 225/55R17 XL | 101          | W             | 7J           | 825                | 290                     | 680                   | 233                | 7.5              |
|              | 235/45R17 XL | 97           | W             | 8J           | 730                | 290                     | 644                   | 236                | 7.6              |
|              | 235/55R17 XL | 103          | W             | 7 1/2J       | 875                | 290                     | 690                   | 245                | 7.5              |
|              | 245/40R17 XL | 95           | W             | 8 1/2J       | 690                | 290                     | 628                   | 248                | 7.5              |
|              | 245/45R17 XL | 99           | W             | 8J           | 775                | 290                     | 652                   | 243                | 7.6              |
|              | 18           | 215/35R18 XL | 84            | W            | 7 1/2J             | 500                     | 290                   | 607                | 218              |
| 225/40R18 XL |              | 92           | W             | 8J           | 630                | 290                     | 637                   | 230                | 7.6              |
| 225/45R18 XL |              | 95           | W             | 7 1/2J       | 690                | 290                     | 659                   | 225                | 7.6              |
| 225/50R18    |              | 95           | V             | 7J           | 690                | 250                     | 683                   | 233                | 7.6              |
| 235/40R18 XL |              | 95           | W             | 8 1/2J       | 690                | 290                     | 645                   | 241                | 7.6              |
| 235/45R18    |              | 94           | W             | 8J           | 670                | 250                     | 669                   | 236                | 7.5              |
| 235/50R18 XL |              | 101          | W             | 7 1/2J       | 825                | 290                     | 693                   | 245                | 7.6              |
| 245/40R18 XL |              | 97           | W             | 8 1/2J       | 730                | 290                     | 653                   | 248                | 7.6              |
| 245/45R18 XL |              | 100          | W             | 8J           | 800                | 290                     | 677                   | 243                | 7.6              |
| 255/45R18 XL |              | 103          | W             | 8 1/2J       | 875                | 290                     | 687                   | 255                | 7.6              |
| 265/35R18 XL |              | 97           | H             | 9 1/2J       | 730                | 290                     | 643                   | 271                | 7.5              |
| 265/60R18 XL |              | 114          | H             | 8J           | 1180               | 290                     | 775                   | 272                | 8.0              |
| 235/35R19 XL |              | 91           | W             | 8 1/2J       | 615                | 290                     | 647                   | 241                | 7.6              |
| 235/40R19 XL |              | 96           | V             | 8 1/2J       | 710                | 290                     | 671                   | 241                | 7.0              |
| 235/55R19 XL |              | 105          | W             | 7 1/2J       | 925                | 290                     | 741                   | 245                | 7.5              |
| 245/40R19 XL |              | 98           | W             | 8 1/2J       | 750                | 290                     | 679                   | 248                | 7.5              |
| 255/35R19 XL |              | 96           | W             | 9J           | 710                | 290                     | 661                   | 260                | 7.5              |
| 265/30R19 XL | 93           | W            | 9 1/2J        | 650          | 290                | 643                     | 271                   | 7.6                |                  |
| 20           | 225/35R20 XL | 90           | W             | 8J           | 600                | 290                     | 666                   | 230                | 7.5              |
|              | 235/30R20 XL | 88           | Y             | 8 1/2J       | 560                | 290                     | 650                   | 242                | 7.6              |
|              | 235/45R20 XL | 100          | W             | 8J           | 800                | 290                     | 720                   | 236                | 7.6              |
|              | 245/35R20 XL | 95           | W             | 8 1/2J       | 690                | 290                     | 680                   | 248                | 7.5              |
|              | 245/45R20 XL | 103          | W             | 8J           | 875                | 290                     | 728                   | 243                | 7.5              |
|              | 245/50R20    | 102          | V             | 7 1/2J       | 850                | 250                     | 754                   | 253                | 7.6              |
|              | 255/35R20    | 97           | W             | 9J           | 730                | 290                     | 686                   | 260                | 7.6              |
|              | 265/45R20    | 104          | W             | 9J           | 900                | 250                     | 746                   | 266                | 7.6              |
|              | 265/50R20 XL | 111          | V             | 8 1/2J       | 1090               | 290                     | 774                   | 277                | 8.0              |
|              | 275/40R20 XL | 106          | W             | 9 1/2J       | 950                | 290                     | 728                   | 278                | 8.1              |
|              | 275/45R20 XL | 110          | V             | 9J           | 1060               | 290                     | 756                   | 273                | 8.1              |
|              | 275/50R20 XL | 113          | W             | 8 1/2J       | 1150               | 290                     | 784                   | 284                | 8.3              |
|              | 275/55R20 XL | 117          | W             | 8 1/2J       | 1285               | 290                     | 810                   | 284                | 8.3              |
|              | 22           | 235/30R22 XL | 90            | W            | 8 1/2J             | 600                     | 290                   | 701                | 242              |
| 245/30R22 XL |              | 92           | W             | 8 1/2J       | 630                | 290                     | 707                   | 248                | 7.8              |
| 255/30R22 XL |              | 95           | V             | 9J           | 730                | 290                     | 713                   | 260                | 7.8              |
| 265/35R22 XL |              | 102          | W             | 9 1/2J       | 850                | 290                     | 745                   | 271                | 7.8              |
| 305/40R22 XL |              | 114          | V             | 11J          | 1180               | 290                     | 803                   | 313                | 8.1              |
| 305/45R22 XL |              | 118          | V             | 10J          | 1320               | 290                     | 833                   | 303                | 8.1              |
| 24           | 305/35R24 XL | 112          | V             | 11J          | 1120               | 290                     | 824                   | 313                | 8                |



# CROSSWIND R791

HIGH WEAR RESISTANCE AND GOOD HANDLING

- High wear resistance;
- Quiet and comfort;
- Specially designed for taxis.

| RIM | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 12  | 145/80R12    | 74         | T             | 4J           | 375                | 240                     | 537                   | 145                | 7.2              |
| 13  | 165/80R13    | 83         | S             | 4.50B        | 485                | 240                     | 594                   | 165                | 7.7              |
| 14  | 175/70R14 XL | 88         | H             | 5J           | 560                | 250                     | 602                   | 177                | 7.7              |
|     | 185/60R14    | 82         | H             | 5 1/2J       | 475                | 250                     | 578                   | 189                | 8.3              |
|     | 195/60R14    | 86         | H             | 6J           | 530                | 250                     | 590                   | 201                | 8.5              |
| 15  | 175/50R15    | 75         | H             | 5 1/2J       | 387                | 250                     | 557                   | 182                | 7.2              |
|     | 185/60R15    | 84         | H             | 5 1/2J       | 500                | 250                     | 603                   | 189                | 8.3              |
|     | 195/60R15    | 88         | H             | 6J           | 560                | 250                     | 615                   | 201                | 8.3              |
|     | 195/65R15    | 91         | H             | 6J           | 615                | 250                     | 635                   | 201                | 8.3              |
| 16  | 205/55R16    | 91         | H             | 6 1/2J       | 615                | 250                     | 632                   | 214                | 8.1              |



# CrossWind EcoTouring

SUPER WEAR RESISTANCE

- Ultra mileage tire;
- Low noise;
- Improved water evacuation.

| RIM | Size      | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|-----------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 12  | 175/70R12 | 80         | H             | 5.00B        | 450                | 250                     | 551                   | 177                | 7.7              |
| 13  | 165/60R13 | 73         | T             | 5.00B        | 365                | 250                     | 528                   | 170                | 7.7              |
|     | 175/70R13 | 82         | T             | 5.00B        | 475                | 250                     | 576                   | 177                | 7.7              |
| 14  | 175/75R13 | 84         | T             | 5J           | 500                | 250                     | 592                   | 177                | 6.0              |
|     | 175/65R14 | 82         | T             | 5J           | 475                | 250                     | 584                   | 177                | 7.7              |
|     | 175/75R14 | 86         | T             | 5J           | 530                | 250                     | 618                   | 177                | 6.0              |

M+S

Three Grooves

| RIM          | Size      | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|--------------|-----------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 13           | 185/70R13 | 86         | T             | 5.50B        | 530                | 250                     | 590                   | 189                | 7.7              |
| 14           | 185/65R14 | 86         | T             | 5 1/2J       | 530                | 250                     | 596                   | 189                | 7.7              |
|              | 185/70R14 | 88         | T             | 5 1/2J       | 560                | 250                     | 616                   | 189                | 7.7              |
|              | 195/70R14 | 91         | T             | 6J           | 615                | 250                     | 630                   | 201                | 7.7              |
| 15           | 185/65R15 | 88         | T             | 5 1/2J       | 560                | 250                     | 621                   | 189                | 7.7              |
|              | 195/50R15 | 82         | H             | 6J           | 475                | 250                     | 577                   | 201                | 8.5              |
|              | 195/60R15 | 88         | H             | 6J           | 560                | 250                     | 615                   | 201                | 8.5              |
|              | 195/65R15 | 91         | H             | 6J           | 615                | 250                     | 635                   | 201                | 8.5              |
|              | 205/60R15 | 91         | H             | 6J           | 615                | 250                     | 627                   | 209                | 8.5              |
|              | 205/65R15 | 94         | H             | 6J           | 670                | 250                     | 647                   | 209                | 8.5              |
|              | 205/70R15 | 96         | T             | 6J           | 710                | 250                     | 669                   | 209                | 8.5              |
|              | 205/75R15 | 97         | S             | 5 1/2J       | 730                | 250                     | 689                   | 203                | 8.5              |
|              | 215/70R15 | 98         | T             | 6 1/2J       | 750                | 250                     | 683                   | 221                | 8.5              |
|              | 215/75R15 | 100        | S             | 6J           | 800                | 250                     | 703                   | 216                | 8.5              |
|              | 225/70R15 | 100        | T             | 6 1/2J       | 800                | 250                     | 697                   | 228                | 8.7              |
|              | 225/75R15 | 102        | S             | 6J           | 850                | 250                     | 719                   | 223                | 8.7              |
|              | 235/75R15 | 105        | S             | 6 1/2J       | 925                | 250                     | 733                   | 235                | 8.7              |
|              | 16        | 205/55R16  | 91            | H            | 6 1/2J             | 615                     | 250                   | 632                | 214              |
| 205/60R16    |           | 92         | H             | 6J           | 630                | 250                     | 652                   | 209                | 8.7              |
| 205/65R16    |           | 95         | H             | 6J           | 690                | 250                     | 672                   | 209                | 8.5              |
| 215/60R16    |           | 95         | H             | 6 1/2J       | 690                | 250                     | 664                   | 221                | 8.7              |
| 215/65R16    |           | 98         | H             | 6 1/2J       | 750                | 250                     | 686                   | 221                | 8.7              |
| 215/70R16    |           | 100        | T             | 6 1/2J       | 800                | 250                     | 708                   | 221                | 8.7              |
| 225/60R16    |           | 98         | H             | 6 1/2J       | 750                | 250                     | 676                   | 228                | 8.7              |
| 225/65R16    |           | 100        | H             | 6 1/2J       | 800                | 250                     | 698                   | 228                | 8.7              |
| 225/70R16 XL |           | 107        | H             | 6 1/2J       | 975                | 290                     | 722                   | 228                | 8.7              |
| 235/70R16    |           | 106        | H             | 7J           | 950                | 250                     | 736                   | 240                | 8.7              |
| 245/70R16    |           | 107        | H             | 7J           | 975                | 250                     | 750                   | 248                | 8.7              |
| 245/75R16    |           | 111        | H             | 7J           | 1090               | 250                     | 774                   | 248                | 8.7              |
| 255/70R16    |           | 111        | S             | 7 1/2J       | 1090               | 250                     | 764                   | 260                | 8.7              |
| 265/70R16    |           | 112        | S             | 8J           | 1120               | 250                     | 778                   | 272                | 8.7              |
| 265/75R16    |           | 116        | H             | 7 1/2J       | 1250               | 250                     | 804                   | 267                | 8.7              |

M+S

Four Grooves



# CrossWind HP<sup>010</sup>

HP TIRE WITH EXCELLENT HANDLING PERFORMANCE, HIGH MILEAGE AND LOW NOISE

- Good straight driving stability;
- Comfortable and quiet ride;
- Excellent handling performance;
- Enhanced wet grip to effectively reduce risk of hydroplaning.

| RIM | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 12  | 155/70R12 WL | 73         | T             | 4.50B        | 365                | 250                     | 523                   | 157                | 6.2              |
|     | 165/70R12 WL | 77         | T             | 5.00B        | 412                | 250                     | 537                   | 170                | 6.2              |
| 14  | 165/55R14    | 72         | V             | 5J           | 355                | 250                     | 538                   | 170                | 7.3              |
|     | 175/65R14    | 82         | H             | 5J           | 475                | 250                     | 584                   | 177                | 7.3              |
|     | 175/70R14    | 84         | T             | 5J           | 500                | 250                     | 602                   | 177                | 7.3              |
| 15  | 175/65R15    | 84         | H             | 5J           | 500                | 250                     | 609                   | 177                | 7.3              |

M+S

Three Grooves

| RIM          | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|--------------|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 14           | 185/60R14    | 82         | H             | 5 1/2J       | 475                | 250                     | 578                   | 189                | 7.7              |
|              | 185/60R14    | 82         | V             | 5 1/2J       | 475                | 250                     | 578                   | 189                | 7.5              |
|              | 185/65R14    | 86         | H             | 5 1/2J       | 530                | 250                     | 596                   | 189                | 7.5              |
|              | 185/70R14    | 88         | H             | 5 1/2J       | 560                | 250                     | 616                   | 189                | 7.7              |
|              | 185/70R14 XL | 92         | H             | 5 1/2J       | 630                | 250                     | 616                   | 189                | 7.7              |
|              | 195/70R14    | 91         | H             | 6J           | 615                | 250                     | 630                   | 201                | 7.7              |
| 15           | 195/70R14 WL | 91         | H             | 6J           | 615                | 250                     | 630                   | 201                | 7.7              |
|              | 185/60R15    | 84         | H             | 5 1/2J       | 500                | 250                     | 603                   | 189                | 7.7              |
|              | 185/65R15    | 88         | H             | 5 1/2J       | 560                | 250                     | 621                   | 189                | 7.7              |
|              | 195/50R15    | 82         | V             | 6J           | 475                | 250                     | 577                   | 201                | 7.7              |
|              | 195/55R15    | 85         | V             | 6J           | 515                | 250                     | 595                   | 201                | 7.7              |
|              | 195/60R15    | 88         | H             | 6J           | 560                | 250                     | 615                   | 201                | 7.7              |
|              | 195/65R15    | 91         | H             | 6J           | 615                | 250                     | 635                   | 201                | 7.7              |
|              | 205/60R15    | 91         | H             | 6J           | 615                | 250                     | 627                   | 209                | 7.7              |
|              | 205/65R15    | 94         | H             | 6J           | 670                | 250                     | 647                   | 209                | 7.7              |
|              | 215/60R15    | 94         | H             | 6 1/2J       | 670                | 250                     | 639                   | 221                | 7.7              |
|              | 215/65R15    | 96         | H             | 6 1/2J       | 710                | 250                     | 661                   | 221                | 7.7              |
|              | 215/65R15 XL | 100        | H             | 6 1/2J       | 800                | 290                     | 661                   | 221                | 7.7              |
|              | 255/70R15    | 108        | S             | 7 1/2J       | 1000               | 250                     | 739                   | 260                | 9.1              |
|              | 16           | 185/55R16  | 83            | V            | 6J                 | 487                     | 250                   | 610                | 194              |
| 195/50R16    |              | 84         | V             | 6J           | 500                | 250                     | 602                   | 201                | 7.5              |
| 195/60R16 XL |              | 93         | H             | 6J           | 650                | 290                     | 640                   | 201                | 7.2              |
| 205/55R16    |              | 91         | H             | 6 1/2J       | 615                | 250                     | 632                   | 214                | 7.7              |
| 205/60R16    |              | 92         | H             | 6J           | 630                | 250                     | 652                   | 209                | 7.7              |
| 205/60R16 XL |              | 96         | H             | 6J           | 710                | 290                     | 652                   | 209                | 7.7              |
| 215/55R16    |              | 93         | H             | 7J           | 650                | 250                     | 642                   | 226                | 7.7              |
| 215/55R16 XL |              | 97         | H             | 7J           | 730                | 290                     | 642                   | 226                | 7.7              |
| 215/60R16    |              | 95         | H             | 6 1/2J       | 690                | 250                     | 664                   | 221                | 7.7              |
| 215/65R16    |              | 98         | H             | 6 1/2J       | 750                | 250                     | 686                   | 221                | 7.7              |
| 225/55R16    |              | 95         | V             | 7J           | 690                | 250                     | 654                   | 233                | 7.7              |
| 225/60R16    |              | 98         | H             | 6 1/2J       | 750                | 250                     | 676                   | 228                | 8.5              |
| 225/65R16    |              | 100        | H             | 6 1/2J       | 800                | 250                     | 698                   | 228                | 8.5              |
| 225/70R16    |              | 103        | H             | 6 1/2J       | 875                | 250                     | 722                   | 228                | 8.5              |
| 17           | 235/60R16    | 100        | H             | 7J           | 800                | 250                     | 688                   | 240                | 8.5              |
|              | 235/65R16    | 103        | H             | 7J           | 875                | 250                     | 712                   | 240                | 8.5              |
|              | 215/50R17    | 91         | V             | 7J           | 615                | 250                     | 648                   | 226                | 7.7              |
|              | 215/55R17    | 94         | V             | 7J           | 670                | 250                     | 668                   | 226                | 7.7              |
|              | 215/60R17    | 96         | H             | 6 1/2J       | 710                | 250                     | 690                   | 221                | 7.7              |
|              | 215/65R17    | 99         | H             | 6 1/2J       | 775                | 250                     | 712                   | 221                | 7.7              |
|              | 225/50R17    | 94         | V             | 7J           | 670                | 250                     | 658                   | 233                | 7.7              |
|              | 225/55R17    | 97         | H             | 7J           | 730                | 250                     | 680                   | 233                | 8.5              |
|              | 225/60R17    | 99         | H             | 6 1/2J       | 775                | 250                     | 702                   | 228                | 8.5              |
|              | 225/65R17    | 102        | H             | 6 1/2J       | 850                | 250                     | 724                   | 228                | 8.5              |
| 18           | 235/55R17    | 99         | H             | 7 1/2J       | 775                | 250                     | 690                   | 245                | 8.5              |
|              | 235/60R17    | 102        | H             | 7J           | 850                | 250                     | 714                   | 240                | 8.5              |
|              | 235/65R17    | 104        | H             | 7J           | 900                | 250                     | 738                   | 240                | 8.5              |
|              | 225/55R18    | 98         | H             | 7J           | 750                | 250                     | 705                   | 233                | 8.5              |
|              | 235/65R18    | 106        | H             | 7J           | 950                | 250                     | 763                   | 240                | 8.5              |

M+S

Four Grooves



# FLASH HERO

NEW PRODUCT

MAX PERFORMANCE TIRE WITH EXCELLENT HANDLING AND GRIP PERFORMANCE.

- Coherent groove design improves the wet grip performance;
- Directional pattern design improves the linear acceleration performance;
- High strength shoulder pattern design improves lateral grip performance for excellent steering performance.

| RIM | Size          | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (Kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|---------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 15  | 195/50R15     | 82         | V             | 6J           | 475                | 250                     | 577                   | 201                | 6.2              |
|     | 205/40ZR17 XL | 84         | Y             | 7 1/2J       | 500                | 290                     | 596                   | 212                | 6.2              |
| 17  | 225/45ZR17    | 94         | Y             | 7 1/2J       | 670                | 290                     | 634                   | 225                | 6.2              |
|     | 235/40ZR17    | 90         | W             | 8 1/2J       | 600                | 250                     | 620                   | 241                | 6.2              |
| 18  | 225/40ZR18 XL | 92         | Y             | 8J           | 630                | 290                     | 637                   | 230                | 6.2              |
|     | 265/35ZR18 XL | 97         | Y             | 9 1/2J       | 730                | 290                     | 643                   | 271                | 6.2              |



# FLASH 100

NEW PRODUCT


EXCELLENT HANDLING AND WET GRIP PERFORMANCE SPORT TIRE

- Excellent handling performance and provides precise steering for driving;
- Enhanced performance in wet condition.

| RIM | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 18  | 265/60R18    | 110        | V             | 8J           | 1060               | 250                     | 775                   | 272                | 8.0              |
|     | 255/50R18 XL | 106        | V             | 8J           | 950                | 290                     | 713                   | 265                | 8.0              |
|     | 255/55R18    | 109        | V             | 8J           | 1030               | 290                     | 737                   | 265                | 8.0              |
| 20  | 265/50R20 XL | 111        | V             | 8 1/2J       | 1090               | 290                     | 774                   | 277                | 8.0              |

M+S

# SPORT UTILITY VEHICLE TIRE

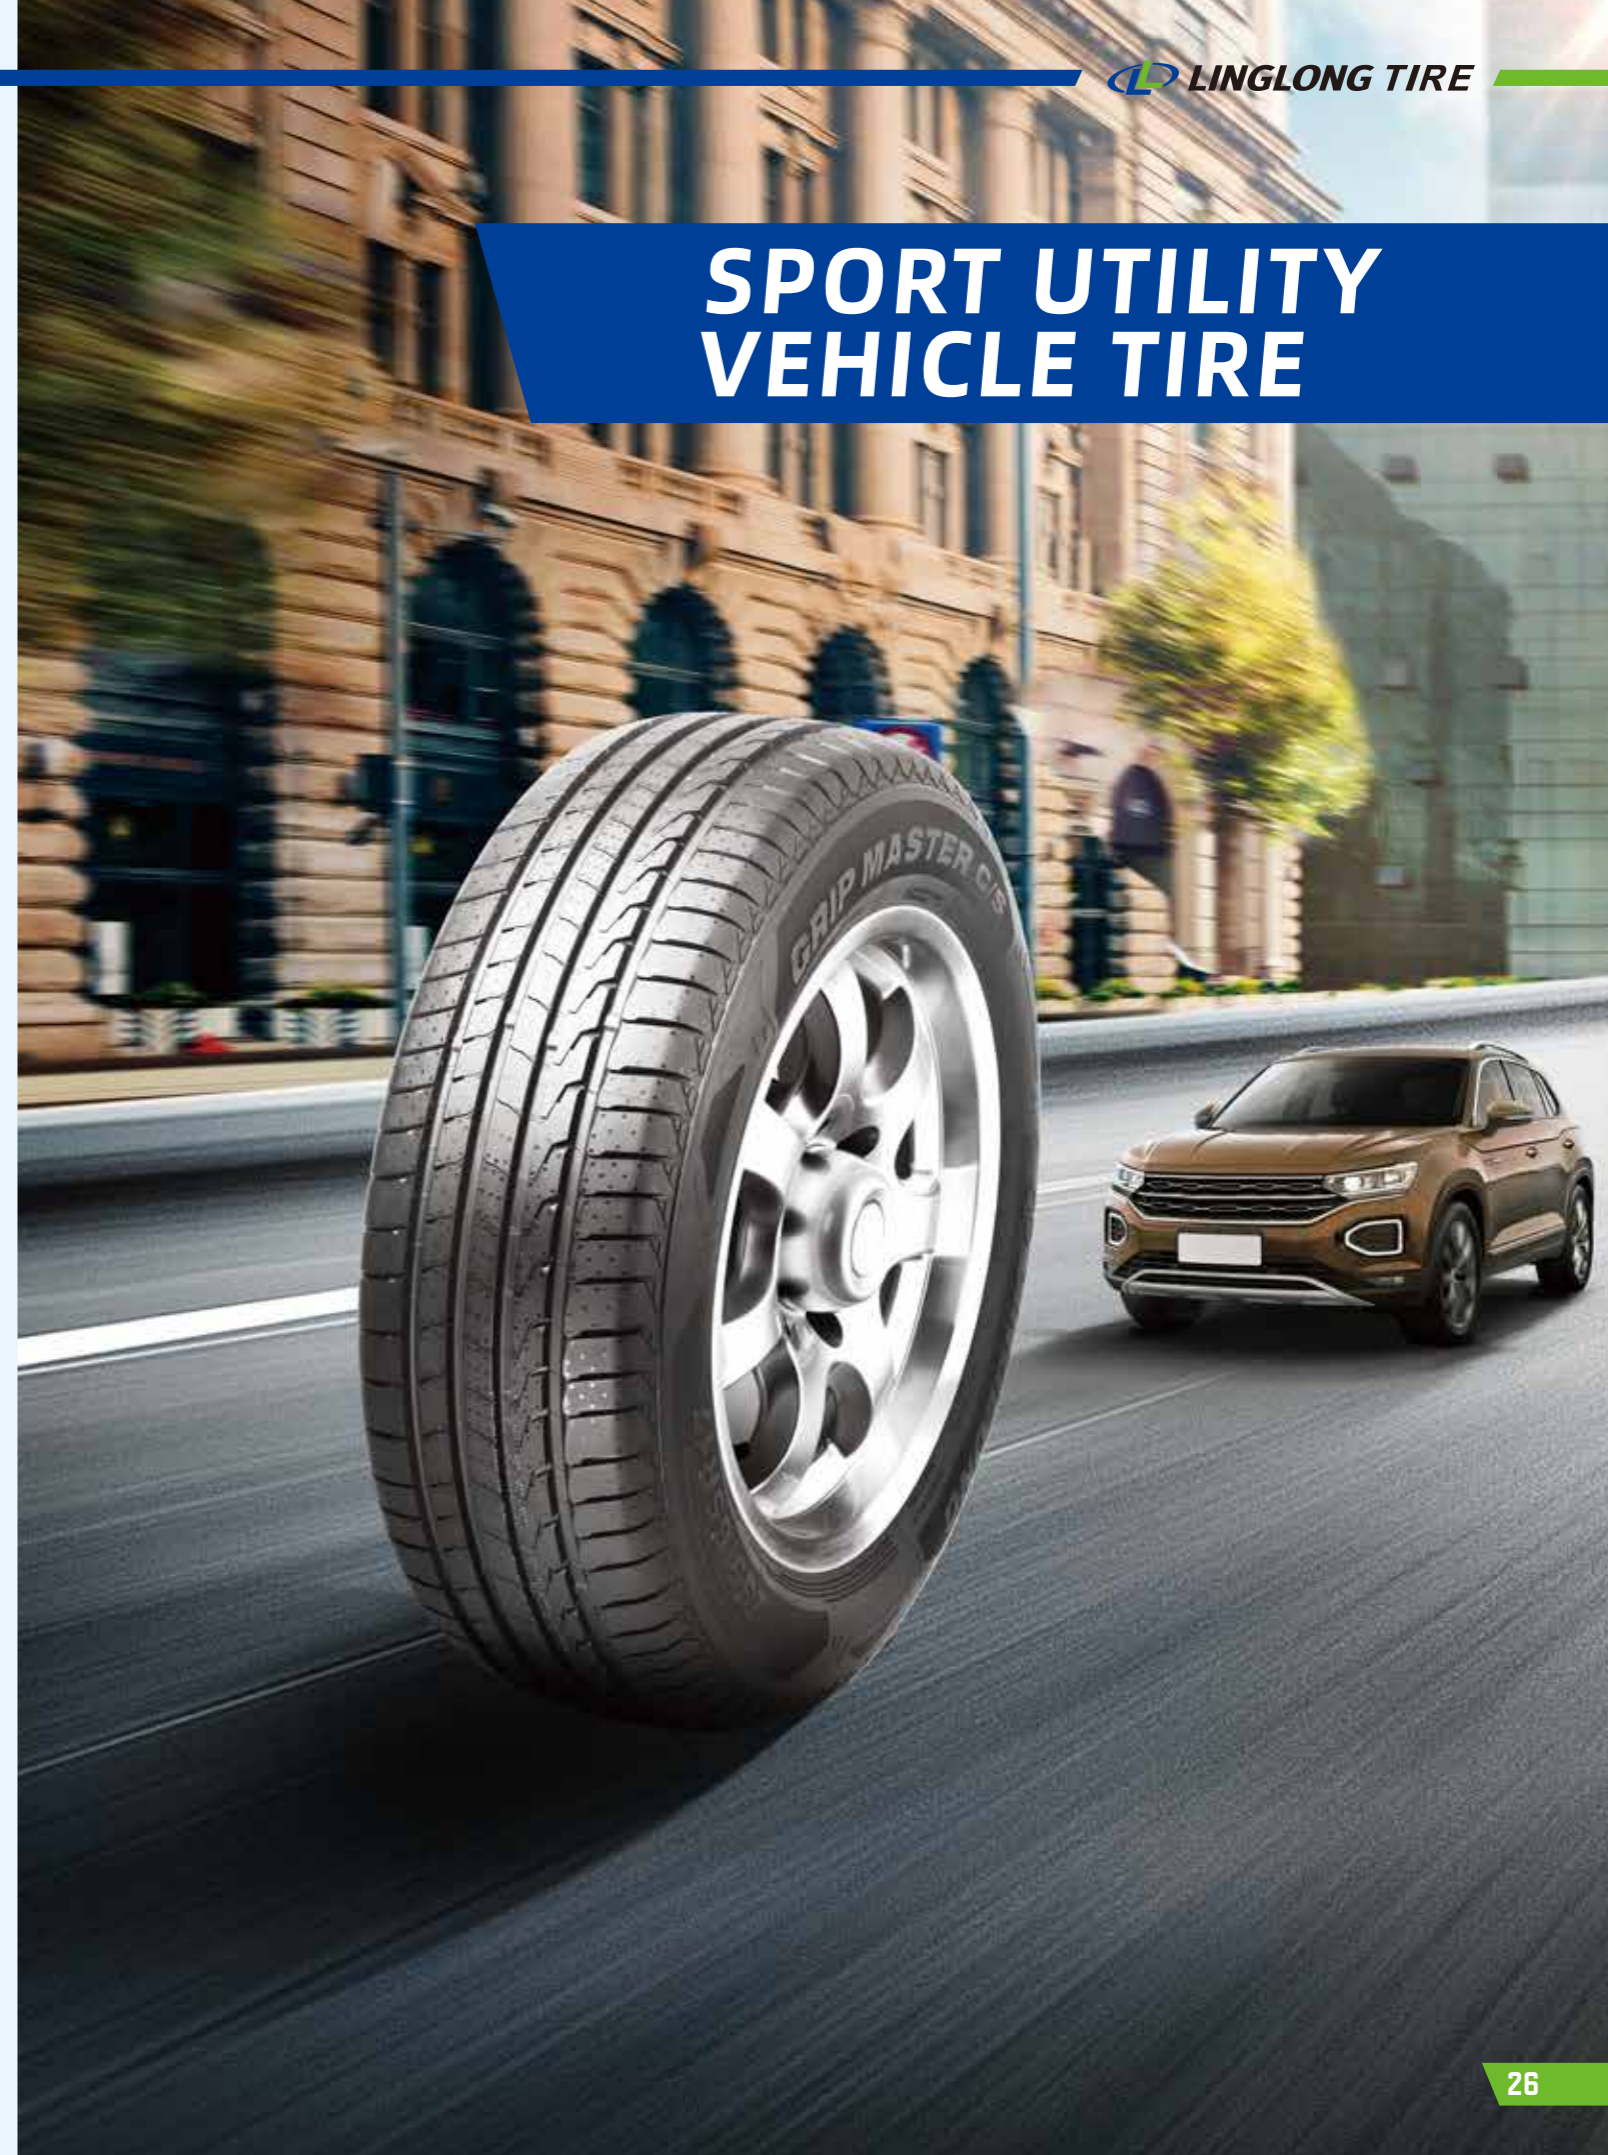



# GRIP MASTER C/S

NEW PRODUCT

GOOD HANDLING AND COMFORTABLE PERFORMANCE

- Excellent grip and handling performance.
- Comfortable and quiet ride.
- Superior wet grip and safety.

| RIM | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 15  | 205/70R15    | 96         | H             | 6J           | 710                | 250                     | 669                   | 209                | 8.0              |
|     | 215/70R15    | 98         | H             | 6 1/2J       | 750                | 250                     | 683                   | 221                | 7.9              |
| 16  | 215/65R16 XL | 102        | H             | 6 1/2J       | 850                | 290                     | 686                   | 221                | 8.0              |
|     | 215/70R16    | 100        | H             | 6 1/2J       | 800                | 250                     | 708                   | 221                | 8.0              |
|     | 225/65R16    | 100        | H             | 6 1/2J       | 800                | 250                     | 698                   | 228                | 8.0              |
|     | 225/70R16    | 103        | H             | 6 1/2J       | 875                | 250                     | 722                   | 228                | 7.7              |
|     | 235/60R16    | 100        | H             | 7J           | 800                | 250                     | 688                   | 240                | 8.0              |
|     | 235/70R16    | 106        | H             | 7J           | 950                | 250                     | 736                   | 240                | 7.9              |
|     | 245/70R16 XL | 111        | H             | 7J           | 1090               | 290                     | 750                   | 248                | 7.9              |
| 17  | 275/70R16    | 114        | H             | 8J           | 1180               | 250                     | 792                   | 279                | 7.9              |
|     | 215/55R17 XL | 98         | V             | 7J           | 750                | 290                     | 668                   | 226                | 8.0              |
|     | 215/60R17    | 96         | H             | 6 1/2J       | 710                | 250                     | 690                   | 221                | 8.0              |
|     | 215/65R17 XL | 103        | V             | 6 1/2J       | 875                | 290                     | 712                   | 221                | 6.9              |
|     | 225/55R17 XL | 101        | V             | 7J           | 825                | 290                     | 680                   | 233                | 8.0              |
|     | 225/65R17 XL | 106        | V             | 6 1/2J       | 950                | 290                     | 724                   | 228                | 8.0              |
|     | 235/60R17 XL | 106        | V             | 7J           | 950                | 290                     | 714                   | 240                | 6.7              |
|     | 235/65R17 XL | 108        | V             | 7J           | 1000               | 290                     | 738                   | 240                | 8.0              |
|     | 255/60R17    | 106        | H             | 7 1/2J       | 950                | 250                     | 738                   | 260                | 8.0              |
|     | 255/65R17    | 110        | H             | 7 1/2J       | 1060               | 250                     | 764                   | 260                | 8.0              |
| 18  | 275/55R17    | 109        | V             | 8 1/2J       | 1030               | 250                     | 734                   | 284                | 7.7              |
|     | 215/50R18    | 92         | W             | 7J           | 630                | 250                     | 673                   | 226                | 7.7              |
|     | 215/55R18 XL | 99         | V             | 7J           | 775                | 290                     | 693                   | 226                | 7.7              |
|     | 225/55R18    | 98         | V             | 7J           | 750                | 250                     | 705                   | 233                | 7.5              |
|     | 225/50R18 XL | 99         | W             | 7J           | 775                | 290                     | 683                   | 233                | 7.6              |
|     | 225/60R18 XL | 104        | V             | 6 1/2J       | 900                | 290                     | 727                   | 228                | 7.4              |
|     | 235/50R18    | 97         | V             | 7 1/2J       | 730                | 250                     | 693                   | 245                | 8.0              |
|     | 235/55R18 XL | 104        | W             | 7 1/2J       | 900                | 290                     | 715                   | 245                | 6.6              |
|     | 235/60R18 XL | 107        | W             | 7J           | 975                | 290                     | 739                   | 240                | 7.7              |
|     | 255/55R18 XL | 109        | Y             | 8J           | 1030               | 290                     | 737                   | 265                | 7.6              |
| 19  | 255/60R18 XL | 112        | V             | 7 1/2J       | 1120               | 290                     | 763                   | 260                | 8.0              |
|     | 205/55R19 XL | 97         | V             | 6 1/2J       | 730                | 290                     | 709                   | 214                | 7.7              |
|     | 235/45R19 XL | 99         | V             | 8J           | 775                | 290                     | 695                   | 236                | 7.7              |
|     | 235/55R19 XL | 105        | W             | 7 1/2J       | 925                | 290                     | 741                   | 245                | 7.7              |
|     | 255/40R19 XL | 100        | W             | 9J           | 800                | 290                     | 687                   | 260                | 7.6              |
|     | 255/55R19 XL | 111        | W             | 8J           | 1090               | 290                     | 763                   | 265                | 7.6              |
| 20  | 285/45R19 XL | 111        | W             | 9 1/2J       | 1090               | 290                     | 739                   | 285                | 7.7              |
|     | 195/55R20 XL | 95         | H             | 6J           | 690                | 290                     | 722                   | 201                | 7.6              |
|     | 235/45R20 XL | 100        | W             | 8J           | 800                | 290                     | 720                   | 236                | 7.7              |
|     | 245/45R20 XL | 103        | W             | 8J           | 875                | 290                     | 728                   | 243                | 7.7              |
|     | 255/40R20 XL | 101        | W             | 9J           | 825                | 290                     | 712                   | 260                | 7.7              |
|     | 255/45R20 XL | 105        | Y             | 8 1/2J       | 925                | 290                     | 738                   | 255                | 7.7              |
|     | 265/50R20 XL | 111        | W             | 8 1/2J       | 1090               | 290                     | 774                   | 277                | 7.7              |
|     | 275/40R20 XL | 106        | V             | 9 1/2J       | 950                | 290                     | 728                   | 278                | 7.7              |
|     | 275/45R20 XL | 110        | W             | 9J           | 1060               | 290                     | 756                   | 273                | 7.7              |
| 21  | 315/35R20 XL | 110        | Y             | 11J          | 1060               | 290                     | 728                   | 320                | 7.7              |
|     | 245/40R21 XL | 100        | W             | 8 1/2J       | 800                | 290                     | 729                   | 248                | 7.7              |
|     | 255/40R21 XL | 102        | W             | 9J           | 850                | 290                     | 737                   | 260                | 7.7              |
|     | 275/45R21 XL | 110        | W             | 9J           | 1060               | 290                     | 781                   | 273                | 7.7              |



# CROSSWIND 4x4 HP

SUV TIRE WITH LOW ROLLING RESISTANCE AND LOW NOISE

- Excellent handling performance;
- Enhanced drainage performance to effectively reduce risk of hydroplaning;
- Superior longitudinal stability for more comfortable ride;
- Low noise to offer a quiet ride.

| RIM | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 15  | 205/70R15    | 96         | H             | 6J           | 710                | 250                     | 669                   | 209                | 8.5              |
| 16  | 205/70R16    | 97         | V             | 6J           | 730                | 250                     | 694                   | 209                | 8.7              |
|     | 215/65R16 XL | 102        | H             | 6 1/2J       | 850                | 290                     | 686                   | 221                | 8.5              |
|     | 215/70R16    | 100        | H             | 6 1/2J       | 800                | 250                     | 708                   | 221                | 8.5              |
|     | 225/65R16    | 100        | H             | 6 1/2J       | 800                | 250                     | 698                   | 228                | 8.5              |
|     | 225/75R16    | 104        | H             | 6J           | 900                | 250                     | 744                   | 223                | 8.5              |
|     | 235/60R16    | 100        | H             | 7J           | 800                | 250                     | 688                   | 240                | 8.5              |
|     | 235/70R16    | 106        | H             | 7J           | 950                | 250                     | 736                   | 240                | 8.5              |
|     | 245/70R16 XL | 111        | H             | 7J           | 1090               | 290                     | 750                   | 248                | 8.5              |
|     | 265/70R16    | 112        | H             | 8J           | 1120               | 250                     | 778                   | 272                | 8.5              |
|     | 275/70R16    | 114        | H             | 8J           | 1180               | 250                     | 792                   | 279                | 8.5              |
| 17  | 215/60R17    | 96         | H             | 6 1/2J       | 710                | 250                     | 690                   | 221                | 8.5              |
|     | 225/55R17 XL | 101        | V             | 7J           | 825                | 290                     | 680                   | 233                | 8.2              |
|     | 225/65R17    | 102        | H             | 6 1/2J       | 850                | 250                     | 724                   | 228                | 8.5              |
|     | 235/55R17 XL | 103        | V             | 7 1/2J       | 875                | 290                     | 690                   | 245                | 8.2              |
|     | 235/60R17 XL | 106        | V             | 7J           | 950                | 290                     | 714                   | 240                | 8.5              |
|     | 235/65R17 XL | 108        | V             | 7J           | 1000               | 290                     | 738                   | 240                | 8.5              |
|     | 245/65R17 XL | 111        | H             | 7J           | 1090               | 290                     | 750                   | 248                | 8.5              |
|     | 255/60R17    | 106        | H             | 7 1/2J       | 950                | 250                     | 738                   | 260                | 8.5              |
|     | 255/65R17    | 110        | H             | 7 1/2J       | 1060               | 250                     | 764                   | 260                | 8.5              |
|     | 265/65R17    | 112        | H             | 8J           | 1120               | 250                     | 776                   | 272                | 8.5              |
| 18  | 275/55R17    | 109        | V             | 8 1/2J       | 1030               | 250                     | 734                   | 284                | 8.2              |
|     | 225/55R18    | 98         | V             | 7J           | 750                | 250                     | 705                   | 233                | 8.7              |
|     | 225/60R18    | 100        | H             | 6 1/2J       | 800                | 250                     | 727                   | 228                | 8.5              |
|     | 235/55R18 XL | 104        | V             | 7 1/2J       | 900                | 290                     | 715                   | 245                | 8.2              |
|     | 235/60R18 XL | 107        | V             | 7J           | 975                | 290                     | 739                   | 240                | 8.5              |
|     | 235/65R18    | 106        | H             | 7J           | 950                | 250                     | 763                   | 240                | 8.5              |
|     | 245/60R18    | 105        | V             | 7J           | 925                | 250                     | 751                   | 248                | 8.5              |
|     | 255/55R18 XL | 109        | V             | 8J           | 1030               | 290                     | 737                   | 265                | 8.2              |
|     | 255/60R18 XL | 112        | V             | 7 1/2J       | 1120               | 290                     | 763                   | 260                | 8.5              |
|     | 255/65R18    | 111        | H             | 7 1/2J       | 1090               | 250                     | 789                   | 260                | 8.7              |
| 19  | 265/60R18    | 110        | H             | 8J           | 1060               | 250                     | 775                   | 272                | 8.5              |
|     | 265/65R18    | 114        | H             | 8J           | 1180               | 250                     | 801                   | 272                | 8.7              |
|     | 265/70R18    | 116        | T             | 8J           | 1250               | 250                     | 829                   | 272                | 8.7              |
|     | 275/60R18    | 113        | H             | 8J           | 1150               | 250                     | 787                   | 279                | 8.5              |
|     | 275/65R18    | 116        | H             | 8J           | 1250               | 250                     | 815                   | 279                | 8.7              |
|     | 235/50R19 XL | 103        | V             | 7 1/2J       | 875                | 290                     | 719                   | 245                | 8                |
|     | 235/55R19 XL | 105        | V             | 7 1/2J       | 925                | 290                     | 741                   | 245                | 8.2              |
|     | 245/55R19    | 103        | V             | 7 1/2J       | 875                | 250                     | 753                   | 253                | 8.7              |
|     | 255/50R19 XL | 107        | W             | 8J           | 975                | 290                     | 739                   | 265                | 8.7              |
|     | 255/55R19 XL | 111        | V             | 8J           | 1090               | 290                     | 763                   | 265                | 8.2              |
| 20  | 255/60R19    | 109        | H             | 7 1/2J       | 1030               | 250                     | 789                   | 260                | 8.7              |
|     | 235/55R20 XL | 105        | V             | 7 1/2J       | 925                | 290                     | 766                   | 245                | 8                |
|     | 245/50R20    | 102        | V             | 7 1/2J       | 850                | 250                     | 754                   | 253                | 8.7              |
|     | 255/50R20 XL | 109        | V             | 8J           | 1030               | 290                     | 764                   | 265                | 8.7              |
|     | 265/50R20 XL | 111        | V             | 8 1/2J       | 1090               | 290                     | 774                   | 277                | 8.7              |
|     | 275/55R20 XL | 117        | V             | 8 1/2J       | 1285               | 290                     | 810                   | 284                | 8.7              |

M+S



# CROSSWIND H/T

SUV TIRE FOR URBAN ROAD USE,  
WITH LOW NOISE AND GOOD DRY/WET PERFORMANCE

- High drainage capability;
- High comfort and low noise;
- Excellent handling performance.

| RIM         | Size          | Ply Rating  | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-------------|---------------|-------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 15          | 235/75R15 XL  | /           | 109        | T             | 6 1/2J       | 1030               | 290                     | 733                   | 235                | 9.7              |
|             | 31X10.50R15LT | 6PR         | 109        | R             | 8 1/2J       | 1030               | 350                     | 775                   | 268                | 11               |
|             | 31X10.50R15LT | 6PR         | 109        | Q             | 8 1/2J       | 1030               | 350                     | 775                   | 268                | 11               |
| 16          | 215/70R16     | /           | 100        | T             | 6 1/2J       | 800                | 250                     | 708                   | 221                | 9                |
|             | 225/70R16     | /           | 103        | T             | 6 1/2J       | 875                | 250                     | 722                   | 228                | 9.5              |
|             | 225/70R16 XL  | /           | 107        | T             | 6 1/2J       | 975                | 290                     | 722                   | 228                | 9.5              |
|             | 235/70R16     | /           | 106        | T             | 7J           | 950                | 250                     | 736                   | 240                | 9.5              |
|             | 245/70R16     | /           | 107        | T             | 7J           | 975                | 250                     | 750                   | 248                | 9.7              |
|             | 245/75R16     | /           | 111        | T             | 7J           | 1090               | 250                     | 774                   | 248                | 9.7              |
|             | 255/70R16     | /           | 111        | T             | 7 1/2J       | 1090               | 250                     | 764                   | 260                | 9.7              |
|             | 265/70R16     | /           | 112        | T             | 8J           | 1120               | 250                     | 778                   | 272                | 9.5              |
|             | 265/75R16     | /           | 116        | T             | 7 1/2J       | 1250               | 250                     | 804                   | 267                | 9.7              |
|             | LT215/85R16   | 10PR        | 115/112    | S             | 6J           | D 1120S 1215       | 550                     | 772                   | 216                | 11               |
|             | LT215/85R16   | 10PR        | 115/112    | Q             | 6J           | D 1120S 1215       | 550                     | 772                   | 216                | 11               |
|             | LT225/75R16   | 10PR        | 115/112    | S             | 6J           | D 1120S 1215       | 550                     | 744                   | 223                | 11               |
| LT225/75R16 | 10PR          | 115/112     | Q          | 6J            | D 1120S 1215 | 550                | 744                     | 223                   | 11                 |                  |
| LT235/85R16 | 10PR          | 120/116     | R          | 6 1/2J        | D 1250S 1400 | 550                | 806                     | 235                   | 11                 |                  |
| LT235/85R16 | 10PR          | 120/116     | Q          | 6 1/2J        | D 1250S 1400 | 550                | 806                     | 235                   | 11                 |                  |
| LT245/75R16 | 10PR          | 120/116     | R          | 7J            | D 1250S 1400 | 550                | 774                     | 248                   | 11                 |                  |
| LT245/75R16 | 10PR          | 120/116     | Q          | 7J            | D 1250S 1400 | 550                | 774                     | 248                   | 11                 |                  |
| LT265/75R16 | 10PR          | 123/120     | R          | 7 1/2J        | D 1400S 1550 | 550                | 804                     | 267                   | 11                 |                  |
| 17          | 235/65R17     | /           | 104        | T             | 7J           | 900                | 250                     | 738                   | 240                | 9.7              |
|             | 245/65R17     | /           | 107        | T             | 7J           | 975                | 250                     | 750                   | 248                | 9.7              |
|             | 245/70R17     | /           | 110        | T             | 7J           | 1060               | 250                     | 776                   | 248                | 9.7              |
|             | 265/65R17     | /           | 112        | T             | 8J           | 1120               | 250                     | 776                   | 272                | 9.7              |
|             | 265/70R17     | /           | 115        | T             | 8J           | 1215               | 250                     | 804                   | 272                | 10.5             |
|             | 275/65R17     | /           | 115        | S             | 8J           | 1215               | 250                     | 790                   | 279                | 9.5              |
|             | 285/65R17     | /           | 116        | S             | 8 1/2J       | 1250               | 250                     | 802                   | 292                | 9.5              |
|             | LT245/75R17   | 10PR        | 121/118    | R             | 7J           | D 1320S 1450       | 550                     | 800                   | 248                | 11               |
|             | LT245/75R17   | 10PR        | 121/118    | Q             | 7J           | D 1320S 1450       | 550                     | 800                   | 248                | 11               |
|             | LT265/70R17   | 10PR        | 121/118    | R             | 8J           | D 1320S 1450       | 550                     | 804                   | 272                | 11               |
|             | LT265/70R17   | 10PR        | 121/118    | Q             | 8J           | D 1320S 1450       | 550                     | 804                   | 272                | 11               |
|             | 18            | LT265/70R18 | 10PR       | 124/121       | R            | 8J                 | D 1450S 1600            | 550                   | 829                | 272              |
| 20          | 275/55R20 XL  | /           | 117        | T             | 8 1/2J       | 1285               | 290                     | 810                   | 284                | 9                |

M+S



# CROSSWIND A/T

ALL TERRAIN TIRE

- Excellent wet performance;
- Large angle grooves to improve self-cleaning ability;
- An optimal balance between performance on road and off road.

| RIM         | Size              | Ply Rating | Load Index | Speed Symbols | Standard Rim  | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-------------|-------------------|------------|------------|---------------|---------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 14          | 175/70R14 XL      | /          | 88         | H             | 5J            | 560                | 290                     | 602                   | 177                | 8.2              |
|             | 175/75R14         | /          | 86         | T             | 5J            | 530                | 250                     | 618                   | 177                | 8.2              |
|             | 175/80R14         | /          | 88         | T             | 5J            | 560                | 240                     | 636                   | 177                | 8.2              |
| 15          | 205/60R15         | /          | 91         | H             | 6J            | 615                | 250                     | 627                   | 209                | 8.8              |
|             | 205/65R15         | /          | 94         | H             | 6J            | 670                | 250                     | 647                   | 209                | 8.8              |
|             | 205/70R15         | /          | 96         | T             | 6J            | 710                | 250                     | 669                   | 209                | 8.8              |
|             | 225/75R15         | /          | 102        | S             | 6J            | 850                | 250                     | 719                   | 223                | 9.2              |
|             | 235/75R15 XL      | /          | 109        | T             | 6 1/2J        | 1030               | 290                     | 733                   | 235                | 9.2              |
|             | 255/70R15         | /          | 108        | T             | 7 1/2J        | 1000               | 250                     | 739                   | 260                | 10.3             |
|             | 265/70R15         | /          | 112        | T             | 8J            | 1120               | 250                     | 753                   | 272                | 11               |
|             | 265/70R15 OWL     | /          | 112        | S             | 8J            | 1120               | 250                     | 753                   | 272                | 11               |
|             | 265/70R15 OWL     | /          | 112        | Q             | 8J            | 1120               | 250                     | 753                   | 272                | 11               |
|             | 31X10.50R15LT     | 6PR        | 109        | R             | 8 1/2J        | 1030               | 350                     | 775                   | 268                | 12.5             |
|             | 31X10.50R15LT OWL | 6PR        | 109        | Q             | 8 1/2J        | 1030               | 350                     | 775                   | 268                | 12.5             |
|             | LT215/75R15       | 6PR        | 100/97     | S             | 6J            | D 730S 800         | 350                     | 703                   | 216                | 10.8             |
|             | LT215/75R15       | 6PR        | 100/97     | Q             | 6J            | D 730S 800         | 350                     | 703                   | 216                | 10.8             |
|             | LT225/75R15       | 6PR        | 102/99     | S             | 6J            | D 775S 850         | 350                     | 719                   | 223                | 11.5             |
|             | LT235/75R15       | 6PR        | 104/101    | R/S           | 6 1/2J        | D 825 S 900        | 350                     | 733                   | 235                | 11.5             |
|             | LT235/75R15       | 6PR        | 104/101    | Q             | 6 1/2J        | D 825 S 900        | 350                     | 733                   | 235                | 11.5             |
|             | LT235/75R15 OWL   | 6PR        | 104/101    | Q             | 6 1/2J        | D 825 S 900        | 350                     | 733                   | 235                | 11.5             |
|             | LT235/75R15       | 10PR       | 116/113    | S             | 6 1/2J        | D 1150 S 1250      | 550                     | 733                   | 235                | 11.5             |
| 16          | 205/60R16         | /          | 92         | H             | 6J            | 630                | 250                     | 652                   | 209                | 8.8              |
|             | 215/65R16         | /          | 98         | T             | 6 1/2J        | 750                | 250                     | 686                   | 221                | 8.2              |
|             | 215/70R16         | /          | 100        | T             | 6 1/2J        | 800                | 250                     | 708                   | 221                | 9.2              |
|             | 225/70R16         | /          | 103        | T             | 6 1/2J        | 875                | 250                     | 722                   | 228                | 9.2              |
|             | 225/70R16 XL      | /          | 107        | T             | 6 1/2J        | 975                | 290                     | 722                   | 228                | 9.2              |
|             | 235/70R16         | /          | 106        | T/Q           | 7J            | 950                | 250                     | 736                   | 240                | 9.2              |
|             | 245/70R16 XL      | /          | 111        | T             | 7J            | 1090               | 290                     | 750                   | 248                | 10.3             |
|             | 245/75R16         | /          | 111        | T             | 7J            | 1090               | 250                     | 774                   | 248                | 10.3             |
|             | 255/70R16         | /          | 111        | S             | 7 1/2J        | 1090               | 250                     | 764                   | 260                | 10.3             |
|             | 265/70R16 OWL     | /          | 112        | Q/T           | 8J            | 1120               | 250                     | 778                   | 272                | 11               |
|             | 265/75R16 OWL     | /          | 116        | T/Q           | 7 1/2J        | 1250               | 250                     | 804                   | 267                | 11               |
|             | 275/70R16 OWL     | /          | 114        | S             | 8J            | 1180               | 250                     | 792                   | 279                | 11               |
|             | 275/70R16 OWL     | /          | 114        | Q             | 8J            | 1180               | 250                     | 792                   | 279                | 11               |
|             | 205R16LT          | 8PR        | 110/108    | R/Q           | 6J            | D 1000 S 1060      | 450                     | 734                   | 208                | 10.8             |
|             | LT215/85R16       | 10PR       | 115/112    | Q             | 6J            | D 1120S 1215       | 550                     | 772                   | 216                | 10.8             |
|             | LT225/75R16       | 10PR       | 115/112    | Q             | 6J            | D 1120S 1215       | 550                     | 744                   | 223                | 11.5             |
|             | LT235/85R16       | 10PR       | 120/116    | S             | 6 1/2J        | D 1250S 1400       | 550                     | 806                   | 235                | 11.5             |
|             | LT235/85R16       | 10PR       | 120/116    | Q             | 6 1/2J        | D 1250S 1400       | 550                     | 806                   | 235                | 11.5             |
|             | LT245/75R16       | 10PR       | 120/116    | Q             | 7J            | D 1260S 1380       | 550                     | 774                   | 248                | 12.1             |
|             | LT265/75R16       | 8PR        | 119/116    | Q             | 7 1/2J        | D 1250S 1360       | 450                     | 804                   | 267                | 12.5             |
|             | LT265/75R16       | 10PR       | 123/120    | R             | 7 1/2J        | D 1400S 1550       | 550                     | 804                   | 267                | 12.5             |
| LT285/75R16 | 10PR              | 126/123    | R          | 8J            | D 1550 S 1700 | 550                | 834                     | 286                   | 12.5               |                  |
| LT305/70R16 | 10PR              | 124/121    | R          | 9J            | D 1450 S 1600 | 450                | 834                     | 311                   | 12.5               |                  |
| 17          | 225/65R17 XL WL   | /          | 106        | T             | 6 1/2J        | 950                | 290                     | 724                   | 228                | 8                |
|             | 225/65R17 XL      | /          | 106        | T             | 6 1/2J        | 950                | 290                     | 724                   | 228                | 8                |
|             | 235/65R17         | /          | 104        | T             | 7J            | 900                | 250                     | 738                   | 240                | 9.2              |
|             | 245/65R17 XL      | /          | 111        | T             | 7J            | 1090               | 290                     | 750                   | 248                | 10.3             |
|             | 245/70R17         | /          | 110        | S             | 7J            | 1060               | 250                     | 776                   | 248                | 10.3             |
|             | 265/65R17         | /          | 112        | T/Q           | 8J            | 1120               | 250                     | 776                   | 272                | 10.7             |
|             | 265/70R17         | /          | 115        | T             | 8J            | 1215               | 250                     | 804                   | 272                | 10.7             |
|             | 275/65R17 XL WL   | /          | 119        | T             | 8J            | 1360               | 290                     | 790                   | 279                | 9                |
|             | P285/70R17 OWL    | /          | 117        | T             | 8 1/2J        | 1285               | 240                     | 832                   | 292                | 11               |

M+S



# CROSSWIND A/T<sup>100</sup>

LOW NOISE ALL-WEATHER TIRE

- All Weather Capability;
- Comfortable Quiet Ride;
- Excellent Snow and Wet Braking;
- Off-Road Traction.

| RIM             | Size            | Ply Rating | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----------------|-----------------|------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 17              | P285/70R17 OWL  | /          | 117        | Q             | 8 1/2J       | 1285               | 240                     | 832                   | 292                | 11               |
|                 | LT235/80R17 OWL | 10PR       | 120/117    | R             | 6 1/2J       | D 1285S 1400       | 550                     | 808                   | 235                | 11.5             |
|                 | LT235/80R17 OWL | 10PR       | 120/117    | Q             | 6 1/2J       | D 1285S 1400       | 550                     | 808                   | 235                | 11.5             |
|                 | LT245/70R17 WL  | 10PR       | 119/116    | Q             | 7J           | D 1250S 1360       | 550                     | 776                   | 248                | 12.1             |
|                 | LT245/75R17 OWL | 10PR       | 121/118    | R             | 7J           | D 1320S 1450       | 550                     | 800                   | 248                | 12               |
|                 | LT245/75R17 OWL | 10PR       | 121/118    | Q             | 7J           | D 1320S 1450       | 550                     | 800                   | 248                | 12               |
|                 | LT265/70R17 OWL | 10PR       | 121/118    | R/Q           | 8J           | D 1320 S 1450      | 550                     | 804                   | 272                | 12.5             |
|                 | LT285/70R17 OWL | 8PR        | 121/118    | S             | 8 1/2J       | D 1320S 1450       | 450                     | 832                   | 292                | 12.5             |
|                 | LT285/70R17 OWL | 8PR        | 121/118    | Q             | 8 1/2J       | D 1320S 1450       | 450                     | 832                   | 292                | 12.5             |
|                 | LT305/70R17 OWL | 8PR        | 119/116    | R             | 9J           | D 1250S 1360       | 350                     | 860                   | 311                | 12.5             |
| LT305/70R17 OWL | 8PR             | 119/116    | Q          | 9J            | D 1250S 1360 | 350                | 860                     | 311                   | 12.5               |                  |
| 18              | 235/60R18 XL WL | /          | 107        | T             | 7J           | 975                | 290                     | 739                   | 240                | 8                |
|                 | 255/55R18 XL WL | /          | 109        | T             | 8J           | 1030               | 290                     | 737                   | 265                | 8                |
|                 | 265/60R18       | /          | 110        | T             | 8J           | 1060               | 250                     | 775                   | 272                | 9.2              |
|                 | 265/60R18       | /          | 110        | Q             | 8J           | 1060               | 250                     | 775                   | 272                | 9.2              |
|                 | 265/60R18 WL    | /          | 110        | T             | 8J           | 1060               | 250                     | 775                   | 272                | 9                |
|                 | 265/70R18       | /          | 116        | T             | 8J           | 1250               | 250                     | 829                   | 272                | 11               |
|                 | 265/70R18 OWL   | /          | 116        | Q             | 8J           | 1250               | 250                     | 829                   | 272                | 11               |
|                 | 275/65R18 OWL   | /          | 116        | T             | 8J           | 1250               | 250                     | 815                   | 279                | 11               |
|                 | 275/65R18 OWL   | /          | 116        | Q             | 8J           | 1250               | 250                     | 815                   | 279                | 11               |
|                 | 285/60R18       | /          | 116        | T             | 8 1/2J       | 1250               | 250                     | 799                   | 292                | 11               |
|                 | 285/60R18 WL    | /          | 116        | T             | 8 1/2J       | 1250               | 250                     | 799                   | 292                | 9                |
|                 | 285/60R18       | /          | 116        | Q             | 8 1/2J       | 1250               | 250                     | 799                   | 292                | 11               |
|                 | LT265/70R18     | 10PR       | 124/121    | S             | 8J           | D 1450S 1600       | 550                     | 829                   | 272                | 12.5             |
|                 | LT275/65R18     | 10PR       | 123/120    | S             | 8J           | D 1400S 1550       | 550                     | 815                   | 279                | 12.5             |
|                 | LT275/70R18     | 8PR        | 121/118    | Q             | 8J           | D 1320S 1450       | 450                     | 843                   | 279                | 12.4             |
|                 | LT275/70R18     | 10PR       | 125/122    | S             | 8J           | D 1500S 1650       | 550                     | 843                   | 279                | 12.5             |
| 20              | P275/55R20      | /          | 111        | S             | 8 1/2J       | 1090               | 240                     | 810                   | 284                | 10.7             |
|                 | P275/60R20      | /          | 114        | T             | 8J           | 1180               | 240                     | 838                   | 279                | 10.7             |
|                 | LT265/60R20 WL  | 10PR       | 121/118    | R             | 8J           | D 1320S 1450       | 550                     | 826                   | 272                | 12.5             |
|                 | LT265/60R20 OWL | 10PR       | 121/118    | Q             | 8J           | D 1320S 1450       | 550                     | 826                   | 272                | 12.5             |
|                 | LT275/65R20     | 10PR       | 126/123    | S             | 8J           | D 1550 S 1700      | 550                     | 866                   | 279                | 12.5             |
|                 | LT285/55R20     | 10PR       | 122/119    | S             | 9J           | D 1360S 1500       | 550                     | 822                   | 297                | 12.5             |
|                 | LT285/65R20     | 10PR       | 127/124    | S             | 8 1/2J       | D 1600S 1750       | 550                     | 878                   | 292                | 12.5             |
|                 | 35X12.50R20LT   | 10PR       | 121        | Q             | 10J          | 1450               | 450                     | 877                   | 318                | 12.5             |

M+S

| RIM | Size          | Ply Rating | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|---------------|------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 15  | 205/70R15     | /          | 96         | T             | 6J           | 710                | 250                     | 669                   | 209                | 8.7              |
|     | 235/75R15 XL  | /          | 109        | T             | 6 1/2J       | 1030               | 290                     | 733                   | 235                | 8.7              |
|     | 255/70R15     | /          | 108        | T             | 7 1/2J       | 1000               | 250                     | 739                   | 260                | 8.7              |
|     | 265/70R15     | /          | 112        | T             | 8J           | 1120               | 250                     | 753                   | 272                | 9.2              |
|     | 31X10.50R15LT | 6PR        | 109        | R             | 8 1/2J       | 1030               | 350                     | 775                   | 268                | 11               |
|     | LT215/75R15   | 6PR        | 100/97     | S             | 6J           | D 730S 800         | 350                     | 703                   | 216                | 9.5              |
| 16  | LT225/75R15   | 6PR        | 102/99     | S             | 6J           | D 775S 850         | 350                     | 719                   | 223                | 9.5              |
|     | LT235/75R15   | 6PR        | 104/101    | S             | 6 1/2J       | D 825 S 900        | 350                     | 733                   | 235                | 9.5              |
|     | 235/70R16     | /          | 106        | T             | 7J           | 950                | 250                     | 736                   | 240                | 8.7              |
|     | 245/70R16 XL  | /          | 111        | T             | 7J           | 1090               | 290                     | 750                   | 248                | 8.7              |
| 17  | 205R16LT      | 8PR        | 110/108    | Q             | 6J           | D 1000 S 1060      | 450                     | 734                   | 208                | 9.5              |
|     | LT225/75R16   | 10PR       | 115/112    | Q             | 6J           | D 1120S 1215       | 550                     | 744                   | 223                | 9.5              |
| 17  | 245/65R17 XL  | /          | 111        | T             | 7J           | 1090               | 290                     | 750                   | 248                | 8.7              |
|     | 265/65R17     | /          | 112        | T             | 8J           | 1120               | 250                     | 776                   | 272                | 9.2              |

M+S





# CROSSWIND M/T

MUD-TERRAIN TIRE

- High floatation;
- Higher load-carrying capacity;
- Excellent Self-cleaning performance;
- Aggressive tread pattern and sidewall design.

| RIM           | Size          | Ply Rating    | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |      |
|---------------|---------------|---------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|------|
| 14            | 205R14C       | 8PR           | 109/107    | R             | 6J           | D 9755 1030        | 450                     | 686                   | 208                | 11.3             |      |
| 15            | 30X9.50R15LT  | 6PR           | 104        | Q             | 7 1/2J       | 900                | 350                     | 756                   | 240                | 13.5             |      |
|               | 31X10.50R15LT | 6PR           | 109        | Q             | 8 1/2J       | 1030               | 350                     | 781                   | 268                | 14.5             |      |
|               | 33X12.50R15LT | 6PR           | 108        | Q             | 10J          | 1000               | 250                     | 832                   | 318                | 14.5             |      |
|               | LT215/75R15   | 6PR           | 100/97     | Q             | 6J           | D 7305 800         | 350                     | 709                   | 216                | 13.5             |      |
| 16            | LT235/75R15   | 6PR           | 104/101    | Q             | 6 1/2J       | D 8255 900         | 350                     | 739                   | 235                | 13.5             |      |
|               | 215/80R16     | /             | 107        | S             | 6J           | 975                | 290                     | 750                   | 216                | 11.5             |      |
|               | 205R16LT      | 8PR           | 110/108    | Q             | 6J           | D 10005 1060       | 450                     | 740                   | 208                | 14.5             |      |
|               | LT225/75R16   | 8PR           | 110/107    | Q             | 6J           | D 9755 1060        | 450                     | 750                   | 223                | 13.5             |      |
|               | LT235/70R16   | 8PR           | 110/107    | Q             | 7J           | D 9755 1060        | 450                     | 742                   | 240                | 13.5             |      |
|               | LT235/85R16   | 10PR          | 120/116    | Q             | 6 1/2J       | D 12605 1380       | 550                     | 806                   | 235                | 13.5             |      |
|               | LT245/75R16   | 10PR          | 120/116    | Q             | 7J           | D 12605 1380       | 550                     | 774                   | 248                | 13.5             |      |
|               | LT255/70R16   | 8PR           | 115/112    | Q             | 7 1/2J       | D 11205 1215       | 450                     | 770                   | 260                | 14.5             |      |
|               | LT265/70R16   | 6PR           | 110/107    | Q             | 8J           | D 9755 1060        | 350                     | 784                   | 272                | 14.5             |      |
|               | LT265/75R16   | 10PR          | 123/120    | Q             | 7 1/2J       | D 14005 1550       | 550                     | 810                   | 267                | 14.5             |      |
|               | LT285/75R16   | 6PR           | 116/113    | Q             | 8J           | D 11505 1250       | 350                     | 840                   | 286                | 14.5             |      |
|               | LT285/75R16   | 10PR          | 126/123    | Q             | 8J           | D 15505 1700       | 550                     | 840                   | 286                | 14.5             |      |
|               | LT305/70R16   | 8PR           | 118/115    | Q             | 9J           | D 12155 1320       | 350                     | 840                   | 311                | 14.5             |      |
|               | LT305/70R16   | 10PR          | 124/121    | Q             | 9J           | D 14505 1600       | 450                     | 834                   | 311                | 14.5             |      |
|               | LT315/75R16   | 8PR           | 121/118    | Q             | 8 1/2J       | D 13205 1450       | 350                     | 884                   | 313                | 14.4             |      |
|               | LT315/75R16   | 10PR          | 127/124    | Q             | 10J          | D 16005 1750       | 450                     | 884                   | 313                | 14.4             |      |
|               | 17            | LT235/80R17   | 10PR       | 120/117       | Q            | 6 1/2J             | D 12855 1400            | 550                   | 808                | 235              | 13.5 |
|               |               | LT255/75R17   | 6PR        | 111/108       | Q            | 7J                 | D 10005 1090            | 350                   | 820                | 255              | 14.5 |
|               |               | LT265/65R17   | 10PR       | 120/117       | Q            | 8J                 | D 12855 1400            | 550                   | 782                | 272              | 14.2 |
|               |               | LT265/70R17   | 10PR       | 121/118       | Q            | 8J                 | D 13205 1450            | 550                   | 810                | 272              | 14.5 |
| LT285/70R17   |               | 8PR           | 121/118    | Q             | 8 1/2J       | D 13205 1450       | 450                     | 838                   | 292                | 14.5             |      |
| LT285/70R17   |               | 10PR          | 121/118    | Q             | 8 1/2J       | D 13205 1450       | 550                     | 838                   | 292                | 14.5             |      |
| LT305/70R17   |               | 8PR           | 119/116    | Q             | 9J           | D 12505 1360       | 350                     | 866                   | 311                | 14.5             |      |
| 35X12.50R17LT |               | 10PR          | 121        | Q             | 10J          | 1450               | 450                     | 883                   | 318                | 14.5             |      |
| 18            |               | LT265/60R18   | 10PR       | 119/116       | Q            | 8J                 | D 12505 1360            | 550                   | 781                | 272              | 14.2 |
|               |               | LT275/70R18   | 10PR       | 125/122       | Q            | 8J                 | D 15005 1650            | 550                   | 843                | 279              | 14.5 |
|               | LT285/65R18   | 10PR          | 125/122    | Q             | 8 1/2J       | D 15005 1650       | 550                     | 833                   | 292                | 14.5             |      |
|               | 33X12.50R18LT | 10PR          | 118        | Q             | 10J          | 1320               | 450                     | 832                   | 318                | 14.5             |      |
|               | 33X12.50R18LT | 12PR          | 122        | Q             | 10J          | 1500               | 550                     | 832                   | 318                | 14.5             |      |
|               | 35X12.50R18LT | 10PR          | 123        | Q             | 10J          | 1550               | 450                     | 883                   | 318                | 14.4             |      |
|               | 35X12.50R18LT | 12PR          | 128        | Q             | 10J          | 1800               | 550                     | 883                   | 318                | 14.4             |      |
| 20            | LT275/65R20   | 10PR          | 126/123    | P             | 8J           | D 15505 1700       | 550                     | 872                   | 279                | 14.5             |      |
|               | LT285/55R20   | 10PR          | 122/119    | Q             | 9J           | D 13605 1500       | 550                     | 822                   | 297                | 14.5             |      |
|               | LT285/65R20   | 10PR          | 127/124    | Q             | 8 1/2J       | D 16005 1750       | 550                     | 884                   | 292                | 14.5             |      |
|               | LT305/55R20   | 10PR          | 121/118    | Q             | 9 1/2J       | D 13205 1450       | 450                     | 850                   | 316                | 14.5             |      |
|               | 33X12.50R20LT | 10PR          | 114        | Q             | 10J          | 1180               | 450                     | 832                   | 318                | 15.8             |      |
|               | 33X12.50R20LT | 12PR          | 119        | Q             | 10J          | 1360               | 550                     | 832                   | 318                | 15.8             |      |
|               | 35X12.50R20LT | 10PR          | 121        | Q             | 10J          | 1450               | 450                     | 883                   | 318                | 15.8             |      |
|               | 35X12.50R20LT | 12PR          | 125        | Q             | 10J          | 1650               | 550                     | 883                   | 318                | 15.8             |      |
|               | 37X13.50R20LT | 10PR          | 127        | Q             | 11J          | 1750               | 450                     | 934                   | 345                | 15.7             |      |
|               | 37X13.50R20LT | 12PR          | 128        | Q             | 10J          | 1800               | 550                     | 934                   | 318                | 15.7             |      |
|               | 38X15.50R20LT | 8PR           | 125        | Q             | 12J          | 1650               | 350                     | 959                   | 395                | 15.7             |      |
|               | 22            | 33X12.50R22LT | 10PR       | 109           | Q            | 10J                | 1030                    | 450                   | 826                | 318              | 15.8 |
| 33X12.50R22LT |               | 12PR          | 114        | Q             | 10J          | 1180               | 550                     | 826                   | 318                | 15.8             |      |
| 35X12.50R22LT |               | 10PR          | 117        | Q             | 10J          | 1285               | 450                     | 877                   | 318                | 15.8             |      |
| 35X12.50R22LT |               | 12PR          | 121        | Q             | 10J          | 1450               | 550                     | 877                   | 318                | 15.8             |      |
| 37X13.50R22LT |               | 10PR          | 123        | Q             | 11J          | 1550               | 450                     | 934                   | 345                | 15.7             |      |
| 37X13.50R22LT |               | 12PR          | 128        | Q             | 11J          | 1800               | 550                     | 934                   | 345                | 15.7             |      |
| 24            | 35X12.50R24LT | 10PR          | 117        | Q             | 10 1/2J      | 1285               | 450                     | 883                   | 316                | 15.7             |      |
|               | 37X13.50R24LT | 10PR          | 120        | Q             | 11J          | 1400               | 450                     | 934                   | 345                | 15.7             |      |
| 26            | 37X13.50R26LT | 10PR          | 117        | Q             | 11J          | 1285               | 450                     | 934                   | 345                | 15.7             |      |

M+S



# GREEN-Max 4x4 HP

SUV TIRES FOR URBAN HIGHWAY USE, WITH GOOD HANDLING AND LOW NOISE

- Excellent handling performance;
- Enhanced drainage performance to effectively reduce risk of hydroplaning;
- Superior longitudinal stability for more comfortable ride;
- Low noise to offer a quiet ride.

| RIM | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 15  | 205/70R15    | 96         | H             | 6J           | 710                | 250                     | 669                   | 209                | 8.8              |
|     | 215/65R16 XL | 102        | H             | 6 1/2J       | 850                | 290                     | 686                   | 221                | 8.8              |
|     | 215/70R16    | 100        | H             | 6 1/2J       | 800                | 250                     | 708                   | 221                | 8.8              |
|     | 225/65R16    | 100        | H             | 6 1/2J       | 800                | 250                     | 698                   | 228                | 8.8              |
|     | 225/75R16    | 104        | H             | 6J           | 900                | 250                     | 744                   | 223                | 8.8              |
|     | 235/60R16    | 100        | H             | 7J           | 800                | 250                     | 688                   | 240                | 8.8              |
|     | 235/70R16    | 106        | H             | 7J           | 950                | 250                     | 736                   | 240                | 8.8              |
|     | 245/70R16 XL | 111        | H             | 7J           | 1090               | 290                     | 750                   | 248                | 8.8              |
| 16  | 265/70R16    | 112        | H             | 8J           | 1120               | 250                     | 778                   | 272                | 8.8              |
|     | 275/70R16    | 114        | H             | 8J           | 1180               | 250                     | 792                   | 279                | 8.8              |
|     | 215/60R17    | 96         | H             | 6 1/2J       | 710                | 250                     | 690                   | 221                | 8.8              |
|     | 215/65R17 XL | 103        | V             | 6 1/2J       | 875                | 290                     | 712                   | 221                | 7.5              |
|     | 225/55R17 XL | 101        | V             | 7J           | 825                | 290                     | 680                   | 233                | 8.5              |
|     | 225/65R17    | 102        | H             | 6 1/2J       | 850                | 250                     | 724                   | 228                | 8.8              |
|     | 225/60R17    | 99         | V             | 6 1/2J       | 775                | 250                     | 702                   | 228                | 7.7              |
|     | 235/55R17 XL | 103        | V             | 7 1/2J       | 875                | 290                     | 690                   | 245                | 8.5              |
|     | 235/60R17 XL | 106        | V             | 7J           | 950                | 290                     | 714                   | 240                | 8.8              |
|     | 235/65R17 XL | 108        | V             | 7J           | 1000               | 290                     | 738                   | 240                | 8.8              |
|     | 245/65R17 XL | 111        | H             | 7J           | 1090               | 290                     | 750                   | 248                | 8.8              |
|     | 255/60R17    | 106        | H             | 7 1/2J       | 950                | 250                     | 738                   | 260                | 8.8              |
| 17  | 255/65R17    | 110        | H             | 7 1/2J       | 1060               | 250                     | 764                   | 260                | 8.8              |
|     | 265/65R17    | 112        | H             | 8J           | 1120               | 250                     | 776                   | 272                | 8.8              |
|     | 275/55R17    | 109        | V             | 8 1/2J       | 1030               | 250                     | 734                   | 284                | 8.8              |
|     | 215/55R18 XL | 99         | V             | 7J           | 775                | 290                     | 693                   | 226                | 7.7              |
|     | 215/55R18    | 95         | V             | 7J           | 690                | 250                     | 693                   | 226                | 7.7              |
|     | 225/55R18    | 98         | V             | 7J           | 750                | 250                     | 705                   | 233                | 7.7              |
|     | 225/60R18    | 100        | H             | 6 1/2J       | 800                | 250                     | 727                   | 228                | 8.8              |
|     | 235/50R18    | 97         | V             | 7 1/2J       | 730                | 250                     | 693                   | 245                | 8.1              |
|     | 235/55R18 XL | 104        | V             | 7 1/2J       | 900                | 290                     | 715                   | 245                | 8.5              |
|     | 235/60R18 XL | 107        | V             | 7J           | 975                | 290                     | 739                   | 240                | 8.8              |
| 18  | 255/55R18 XL | 109        | V/W           | 8J           | 1030               | 290                     | 737                   | 265                | 8.5              |
|     | 255/60R18 XL | 112        | V             | 7 1/2J       | 1120               | 290                     | 763                   | 260                | 8.8              |
|     | 265/60R18    | 110        | H             | 8J           | 1060               | 250                     | 775                   | 272                | 7.5              |
|     | 275/60R18    | 113        | H             | 8J           | 1150               | 250                     | 787                   | 279                | 8.8              |
|     | 225/55R19    | 99         | V             | 7J           | 775                | 250                     | 731                   | 233                | 8                |
|     | 255/50R19 XL | 107        | W             | 8J           | 975                | 290                     | 739                   | 265                | 8.1              |
|     | 255/55R19 XL | 111        | V             | 8J           | 1090               | 290                     | 763                   | 265                | 8.5              |
|     | 265/50R19 XL | 110        | W             | 8 1/2J       | 1060               | 290                     | 749                   | 277                | 7.5              |
|     | 265/50R20 XL | 111        | V             | 8 1/2J       | 1090               | 290                     | 774                   | 277                | 7.5              |
|     | 275/40R20 XL | 106        | V             | 9 1/2J       | 950                | 290                     | 728                   | 278                | 8.1              |
| 20  | 275/45R20 XL | 110        | V             | 9J           | 1060               | 290                     | 756                   | 273                | 8.1              |
|     | 315/35R20 XL | 110        | W             | 11J          | 1060               | 290                     | 728                   | 320                | 8                |
|     | 295/35R21 XL | 107        | W             | 10 1/2J      | 975                | 290                     | 739                   | 301                | 8                |
| 22  | 275/40R22 XL | 107        | W             | 9 1/2J       | 975                | 290                     | 779                   | 278                | 8                |
|     | 285/35R22 XL | 106        | V             | 10J          | 950                | 290                     | 759                   | 290                | 8.1              |

M+S



# RADIAL620

ALL TERRAIN TIRE

- Excellent wet performance;
- An optimal balance between performance on road and off road.

| RIM | Size         | Ply Rating | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|--------------|------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 14  | 185R14C      | 8PR        | 102/100    | Q             | 5 1/2J       | D 800 S 850        | 450                     | 652                   | 189                | 8.5              |
|     | 195R14C      | 8PR        | 106/104    | Q             | 5 1/2J       | D 875 S 925        | 450                     | 668                   | 196                | 8.7              |
| 15  | 205/70R15    | /          | 96         | H             | 6J           | 710                | 250                     | 669                   | 209                | 8.0              |
|     | 265/70R15    | /          | 112        | T             | 8J           | 1120               | 250                     | 753                   | 272                | 10.2             |
| 16  | 205/80R16 XL | /          | 104        | T             | 5 1/2J       | 900                | 280                     | 734                   | 203                | 8.0              |
|     | 215/65R16    | /          | 98         | H             | 6 1/2J       | 750                | 250                     | 686                   | 221                | 10.2             |
|     | 215/70R16    | /          | 100        | T             | 6 1/2J       | 800                | 250                     | 708                   | 221                | 8.0              |
|     | 225/75R16 XL | /          | 108        | R             | 6J           | 1000               | 290                     | 744                   | 223                | 9.2              |
|     | 235/70R16    | /          | 106        | T             | 7J           | 950                | 250                     | 736                   | 240                | 10.2             |
|     | 245/70R16    | /          | 107        | H             | 7J           | 975                | 250                     | 750                   | 248                | 10.2             |
|     | 245/70R16 XL | /          | 111        | H             | 7J           | 1090               | 290                     | 750                   | 248                | 10.2             |
|     | 265/70R16    | /          | 112        | H             | 8J           | 1120               | 250                     | 778                   | 272                | 10.2             |
| 17  | 235/65R17 XL | /          | 108        | H             | 7J           | 1000               | 290                     | 738                   | 240                | 10.2             |
|     | 275/55R17    | /          | 109        | V             | 8 1/2J       | 1030               | 250                     | 734                   | 284                | 10.2             |

M+S



# LMB3

ALL TERRAIN TIRE

- Excellent traction and handling performance;
- Excellent wear resistance performance;
- All Terrain Tire.

| RIM | Size              | Ply Rating | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|-------------------|------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 15  | 215/75R15         | /          | 100        | S             | 6J           | 800                | 250                     | 703                   | 216                | 9.2              |
|     | P215/75R15        | /          | 100        | S             | 6J           | 800                | 250                     | 703                   | 216                | 9.2              |
|     | 235/75R15         | /          | 105        | S             | 6 1/2J       | 925                | 250                     | 733                   | 235                | 9.2              |
|     | P235/75R15        | /          | 105        | S             | 6 1/2J       | 925                | 250                     | 733                   | 235                | 9.2              |
|     | 195/70R15C        | 8PR        | 99/96      | R             | 6J           | D710 S775          | 450                     | 655                   | 201                | 10               |
|     | 195/70R15C(WHITE) | 8PR        | 104/102    | R             | 6J           | D850 S900          | 450                     | 655                   | 201                | 10               |



# ALL SEASON TIRE



# GREEN-Max All Season

## ALL SEASON TIRE

- Excellent handling;
- Lower rolling resistance;
- All season tire which is applicable to different weather and road conditions.

| RIM          | Size         | Load Index   | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|--------------|--------------|--------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 13           | 145/70R13    | 71           | T             | 4.50B        | 345                | 250                     | 534                   | 150                | 6.2              |
|              | 145/80R13    | 75           | T             | 4.00B        | 387                | 240                     | 562                   | 145                | 6.2              |
|              | 155/65R13    | 73           | T             | 4.50B        | 365                | 250                     | 532                   | 157                | 6.2              |
|              | 155/70R13    | 75           | T             | 4.50B        | 387                | 250                     | 548                   | 157                | 7.0              |
|              | 155/80R13    | 79           | T             | 4.50B        | 437                | 240                     | 578                   | 157                | 7.0              |
|              | 165/70R13    | 79           | T             | 5.00B        | 437                | 250                     | 562                   | 170                | 7.0              |
|              | 175/65R13    | 80           | T             | 5.00B        | 450                | 250                     | 558                   | 177                | 6.2              |
| 175/70R13    | 82           | T            | 5.00B         | 475          | 250                | 576                     | 177                   | 7.0                |                  |
| 14           | 155/65R14    | 75           | T             | 4 1/2J       | 387                | 250                     | 558                   | 157                | 7.0              |
|              | 165/60R14    | 75           | H             | 5J           | 387                | 250                     | 554                   | 170                | 7.0              |
|              | 165/65R14    | 79           | T             | 5J           | 437                | 250                     | 570                   | 170                | 7.0              |
|              | 165/70R14    | 81           | T             | 5J           | 462                | 250                     | 588                   | 170                | 7.0              |
|              | 175/65R14    | 82           | T             | 5J           | 475                | 250                     | 584                   | 177                | 7.0              |
|              | 175/70R14 XL | 88           | T             | 5J           | 560                | 290                     | 602                   | 177                | 7.0              |
|              | 175/80R14    | 88           | T             | 5J           | 560                | 240                     | 636                   | 177                | 6.2              |
|              | 185/55R14    | 80           | H             | 6J           | 450                | 250                     | 560                   | 194                | 6.2              |
|              | 185/60R14    | 82           | H             | 5 1/2J       | 475                | 250                     | 578                   | 189                | 7.0              |
|              | 185/65R14    | 86           | H             | 5 1/2J       | 530                | 250                     | 596                   | 189                | 6.2              |
| 185/70R14    | 88           | H            | 5 1/2J        | 560          | 250                | 616                     | 189                   | 6.2                |                  |
| 195/70R14    | 91           | T            | 6J            | 615          | 250                | 630                     | 201                   | 6.7                |                  |
| 15           | 165/60R15    | 77           | H             | 5J           | 412                | 250                     | 579                   | 170                | 7.0              |
|              | 165/65R15    | 81           | T             | 5J           | 462                | 250                     | 595                   | 170                | 6.2              |
|              | 175/65R15 XL | 88           | T             | 5J           | 560                | 290                     | 609                   | 177                | 7.0              |
|              | 185/55R15    | 82           | H             | 6J           | 475                | 250                     | 585                   | 194                | 7.0              |
|              | 185/60R15 XL | 88           | H             | 5 1/2J       | 560                | 290                     | 603                   | 189                | 7.0              |
|              | 185/65R15    | 88           | H             | 5 1/2J       | 560                | 250                     | 621                   | 189                | 7.0              |
|              | 195/50R15 XL | 86           | H             | 6J           | 530                | 290                     | 577                   | 201                | 7.0              |
|              | 195/55R15    | 85           | H             | 6J           | 515                | 250                     | 595                   | 201                | 7.0              |
|              | 195/60R15    | 88           | H             | 6J           | 560                | 250                     | 615                   | 201                | 7.0              |
|              | 195/65R15    | 91           | H             | 6J           | 615                | 250                     | 635                   | 201                | 7.0              |
|              | 205/65R15    | 94           | H             | 6J           | 670                | 250                     | 647                   | 209                | 7.0              |
| 215/65R15    | 96           | H            | 6 1/2J        | 710          | 250                | 661                     | 221                   | 6.7                |                  |
| 16           | 195/45R16 XL | 84           | H             | 6 1/2J       | 500                | 290                     | 582                   | 195                | 6.7              |
|              | 195/50R16 XL | 88           | V             | 6J           | 560                | 290                     | 602                   | 201                | 6.7              |
|              | 195/55R16    | 87           | H             | 6J           | 545                | 250                     | 620                   | 201                | 7.0              |
|              | 205/45R16    | 83           | V             | 7J           | 487                | 250                     | 590                   | 206                | 6.7              |
|              | 205/55R16    | 91           | V             | 6 1/2J       | 615                | 250                     | 632                   | 214                | 7.0              |
|              | 205/60R16 XL | 96           | H             | 6J           | 710                | 290                     | 652                   | 209                | 7.0              |
|              | 215/45R16 XL | 90           | V             | 7J           | 600                | 290                     | 600                   | 213                | 6.7              |
|              | 215/55R16 XL | 97           | V             | 7J           | 730                | 290                     | 642                   | 226                | 7.0              |
|              | 215/60R16 XL | 99           | H             | 6 1/2J       | 775                | 290                     | 664                   | 221                | 7.0              |
|              | 215/65R16 XL | 102          | V             | 6 1/2J       | 850                | 290                     | 686                   | 221                | 6.7              |
|              | 215/70R16    | 100          | H             | 6 1/2J       | 800                | 250                     | 708                   | 221                | 6.7              |
|              | 225/55R16 XL | 99           | V             | 7J           | 775                | 290                     | 654                   | 233                | 6.7              |
|              | 225/60R16 XL | 102          | V             | 6 1/2J       | 850                | 290                     | 676                   | 228                | 6.7              |
| 17           | 205/45R17 XL | 88           | V             | 7J           | 560                | 290                     | 616                   | 206                | 6.7              |
|              | 205/50R17 XL | 93           | V             | 6 1/2J       | 650                | 290                     | 638                   | 214                | 7.0              |
|              | 205/55R17 XL | 95           | V             | 6 1/2J       | 690                | 290                     | 658                   | 214                | 7.0              |
|              | 215/40R17 XL | 87           | V             | 7 1/2J       | 545                | 290                     | 604                   | 218                | 6.7              |
|              | 215/45R17 XL | 91           | V             | 7J           | 615                | 290                     | 626                   | 213                | 6.7              |
|              | 215/50R17 XL | 95           | V             | 7J           | 690                | 290                     | 648                   | 226                | 7.0              |
|              | 215/55R17 XL | 98           | V             | 7J           | 750                | 290                     | 668                   | 226                | 7.0              |
|              | 215/60R17 XL | 100          | V             | 6 1/2J       | 800                | 290                     | 690                   | 221                | 7.0              |
|              | 225/45R17 XL | 94           | V             | 7 1/2J       | 670                | 290                     | 634                   | 225                | 7.0              |
|              | 225/50R17 XL | 98           | V             | 7J           | 750                | 290                     | 658                   | 233                | 7.0              |
|              | 225/55R17 XL | 101          | V             | 7J           | 825                | 290                     | 680                   | 233                | 7.0              |
|              | 225/60R17 XL | 103          | V             | 6 1/2J       | 875                | 290                     | 702                   | 228                | 6.7              |
|              | 225/65R17    | 102          | H             | 6 1/2J       | 850                | 250                     | 724                   | 228                | 6.7              |
|              | 235/45R17 XL | 97           | V             | 8J           | 730                | 290                     | 644                   | 236                | 6.7              |
|              | 235/55R17 XL | 103          | V             | 7 1/2J       | 875                | 290                     | 690                   | 245                | 6.7              |
|              | 235/65R17 XL | 108          | V             | 7J           | 1000               | 290                     | 738                   | 240                | 6.7              |
|              | 245/45R17 XL | 99           | V             | 8J           | 775                | 290                     | 652                   | 243                | 6.7              |
|              | 18           | 215/55R18 XL | 99            | V            | 7J                 | 775                     | 290                   | 693                | 226              |
| 225/40R18 XL |              | 92           | V             | 8J           | 630                | 290                     | 637                   | 230                | 6.7              |
| 225/45R18 XL |              | 95           | V             | 7 1/2J       | 690                | 290                     | 659                   | 225                | 6.7              |
| 245/40R18 XL |              | 97           | V             | 8 1/2J       | 730                | 290                     | 653                   | 248                | 7.0              |
| 19           | 225/35R19 XL | 88           | V             | 8J           | 560                | 290                     | 641                   | 230                | 6.7              |
|              | 235/35R19 XL | 91           | V             | 8 1/2J       | 615                | 290                     | 647                   | 241                | 6.7              |



# GREEN-Max Van 4S

## FOR ALL SEASON COMMERCIAL

- Various design of the 3D sipe, Optimization tread pattern stiffness distribution, The tire have good wet&ice road grip performance.
- Application of spring hole, product with Excellent appearance.

| RIM        | Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|------------|-------------|------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 14         | 165/70R14C  | 6PR        | 89/87      | R             | 5J           | D 545 S 580        | 375                     | 588                   | 170                | 7.5              |
|            | 175/65R14C  | 6PR        | 90/88      | T             | 5J           | D 560 S 600        | 375                     | 584                   | 177                | 7.5              |
|            | 175/70R14C  | 6PR        | 95/93      | T             | 5J           | D 650 S 690        | 375                     | 602                   | 177                | 7.5              |
| 15         | 195/70R15C  | 8PR        | 104/102    | R             | 6J           | D 850 S 900        | 450                     | 655                   | 201                | 7.8              |
|            | 205/70R15C  | 8PR        | 106/104    | R             | 6J           | D 900S 950         | 450                     | 669                   | 209                | 7.8              |
|            | 215/70R15C  | 8PR        | 109/107    | R             | 6 1/2J       | D 975S 1030        | 450                     | 683                   | 221                | 7.8              |
|            | 225/70R15C  | 8PR        | 112/110    | S             | 6 1/2J       | D 1060S 1120       | 450                     | 697                   | 228                | 7.8              |
| 16         | 185/75R16LT | 8PR        | 104/102    | R             | 5J           | D 850 S 900        | 475                     | 684                   | 184                | 7.5              |
|            | 195/60R16C  | 6PR        | 99/97      | R             | 6J           | D 730S 775         | 375                     | 640                   | 201                | 7.8              |
|            | 195/65R16C  | 8PR        | 104/102    | R             | 6J           | D 850 S 900        | 475                     | 660                   | 201                | 7.8              |
|            | 195/75R16C  | 8PR        | 107/105    | R             | 5 1/2J       | D 925 S 975        | 475                     | 698                   | 196                | 7.8              |
|            | 205/65R16C  | 8PR        | 107/105    | T             | 6J           | D 925S 975         | 475                     | 672                   | 209                | 7.8              |
|            | 205/75R16C  | 8PR        | 110/108    | T             | 5 1/2J       | D 1000S 1060       | 475                     | 714                   | 203                | 7.8              |
|            | 215/60R16LT | 6PR        | 103/101    | T             | 6 1/2J       | D 825S 875         | 375                     | 664                   | 221                | 7.8              |
|            | 215/65R16C  | 8PR        | 109/107    | T             | 6 1/2J       | D 975S 1030        | 475                     | 686                   | 221                | 7.8              |
|            | 215/75R16C  | 8PR        | 113/111    | R             | 6J           | D 1090S 1150       | 475                     | 728                   | 216                | 7.8              |
|            | 225/65R16C  | 8PR        | 112/110    | S             | 6 1/2J       | D 1060S 1120       | 475                     | 698                   | 228                | 7.8              |
| 225/75R16C | 10PR        | 118/116    | R          | 6J            | D 1250S 1320 | 525                | 744                     | 223                   | 7.8                |                  |
| 235/65R16C | 8PR         | 115/113    | R          | 7J            | D 1150S 1215 | 475                | 712                     | 240                   | 7.8                |                  |
| 17         | 215/60R17C  | 8PR        | 109/107    | T             | 6 1/2J       | D 975S 1030        | 475                     | 690                   | 221                | 7.8              |





# GRIP MASTER 4S

NEW PRODUCT

HIGH PERFORMANCE ALL SEASON TYRE

- Excellent wet performance which improved 20% than that of the previous generation;
- Excellent grip performance ,effectively improve the safety of drivin under the wet surface;
- Tread compound with low temperature resistant for winter and summer conditions.

| RIM          | Size          | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|--------------|---------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 13           | 155/80R13     | 79         | T             | 4.50B        | 437                | 240                     | 578                   | 157                | 7.0              |
|              | ○ 155/70R13   | 75         | T             | 4.50B        | 387                | 250                     | 548                   | 157                | -                |
|              | ○ 165/70R13   | 79         | T             | 5.00B        | 437                | 250                     | 562                   | 170                | -                |
| 14           | 155/65R14     | 75         | T             | 4 1/2J       | 387                | 250                     | 558                   | 157                | 7.0              |
|              | ○ 165/60R14   | 75         | H             | 5J           | 387                | 250                     | 554                   | 170                | -                |
|              | ○ 165/65R14   | 79         | T             | 5J           | 437                | 250                     | 570                   | 170                | -                |
|              | 165/70R14     | 81         | T             | 5J           | 462                | 250                     | 588                   | 170                | 7.0              |
|              | 175/65R14     | 82         | T             | 5J           | 475                | 250                     | 584                   | 177                | 7.0              |
|              | ○175/70R14 XL | 88         | T             | 5J           | 560                | 290                     | 602                   | 177                | -                |
|              | 185/60R14     | 82         | H             | 5 1/2J       | 475                | 250                     | 578                   | 189                | 7.0              |
| 15           | ○ 185/65R14   | 86         | H             | 5 1/2J       | 530                | 250                     | 596                   | 189                | -                |
|              | ○ 165/65R15   | 81         | T             | 5J           | 462                | 250                     | 595                   | 170                | -                |
|              | ○175/65R15 XL | 88         | T             | 5J           | 560                | 290                     | 609                   | 177                | -                |
|              | 185/55R15     | 82         | H             | 6J           | 475                | 250                     | 585                   | 194                | 7.0              |
|              | 185/60R15 XL  | 88         | H             | 5 1/2J       | 560                | 290                     | 603                   | 189                | 7.0              |
|              | 185/65R15     | 88         | H             | 5 1/2J       | 560                | 250                     | 621                   | 189                | 7.0              |
|              | 195/50R15 XL  | 86         | H             | 6J           | 530                | 290                     | 577                   | 201                | 7.0              |
|              | 195/55R15     | 85         | H             | 6J           | 515                | 250                     | 595                   | 201                | 7.0              |
|              | 195/60R15     | 88         | H             | 6J           | 560                | 250                     | 615                   | 201                | 7.0              |
|              | 195/65R15     | 91         | H             | 6J           | 615                | 250                     | 635                   | 201                | 7.0              |
| 16           | ○ 205/65R15   | 94         | H             | 6J           | 670                | 250                     | 647                   | 209                | -                |
|              | 195/45R16 XL  | 84         | V             | 6 1/2J       | 500                | 290                     | 582                   | 195                | 7.0              |
|              | 195/55R16     | 87         | V             | 6J           | 545                | 250                     | 620                   | 201                | 7.0              |
|              | 205/55R16     | 91         | V             | 6 1/2J       | 615                | 250                     | 632                   | 214                | 7.0              |
|              | 205/60R16 XL  | 96         | V             | 6J           | 710                | 290                     | 652                   | 209                | 7.0              |
|              | 215/55R16 XL  | 97         | V             | 7J           | 730                | 290                     | 642                   | 226                | 7.0              |
|              | 215/60R16 XL  | 99         | V             | 6 1/2J       | 775                | 290                     | 664                   | 221                | 7.0              |
|              | 215/65R16 XL  | 102        | V             | 6 1/2J       | 850                | 290                     | 686                   | 221                | -                |
|              | ○ 215/70R16   | 100        | H             | 6 1/2J       | 800                | 250                     | 708                   | 221                | -                |
| 17           | 245/70R16     | 107        | H             | 7J           | 975                | 250                     | 750                   | 248                | 7.0              |
|              | ○205/45R17 XL | 88         | W             | 7J           | 560                | 290                     | 616                   | 206                | -                |
|              | 205/50R17 XL  | 93         | V             | 6 1/2J       | 650                | 290                     | 638                   | 214                | 7.0              |
|              | 205/55R17 XL  | 95         | W             | 6 1/2J       | 690                | 290                     | 658                   | 214                | 7.0              |
|              | ○215/40R17 XL | 87         | V             | 7 1/2J       | 545                | 290                     | 604                   | 218                | -                |
|              | ○215/45R17 XL | 91         | W             | 7J           | 615                | 290                     | 626                   | 213                | -                |
|              | ○215/50R17 XL | 95         | W             | 7J           | 690                | 290                     | 648                   | 226                | -                |
|              | ○215/55R17 XL | 98         | V             | 7J           | 750                | 290                     | 668                   | 226                | -                |
|              | 215/60R17 XL  | 100        | V             | 6 1/2J       | 800                | 290                     | 690                   | 221                | 7.0              |
|              | 225/45R17 XL  | 94         | W             | 7 1/2J       | 670                | 290                     | 634                   | 225                | 7.0              |
|              | 225/50R17 XL  | 98         | V             | 7J           | 750                | 290                     | 658                   | 233                | 7.5              |
|              | ○225/55R17 XL | 101        | V             | 7J           | 825                | 290                     | 680                   | 233                | -                |
|              | ○225/60R17 XL | 103        | V             | 6 1/2J       | 875                | 290                     | 702                   | 228                | -                |
|              | ○225/65R17 XL | 106        | V             | 6 1/2J       | 950                | 290                     | 724                   | 228                | -                |
| 18           | ○235/45R17 XL | 97         | W             | 8J           | 730                | 290                     | 644                   | 236                | -                |
|              | ○235/55R17 XL | 103        | W             | 7 1/2J       | 875                | 290                     | 690                   | 245                | -                |
|              | ○235/65R17 XL | 108        | V             | 7J           | 1000               | 290                     | 738                   | 240                | -                |
|              | ○245/45R17 XL | 99         | W             | 8J           | 775                | 290                     | 652                   | 243                | -                |
|              | 215/40R18 XL  | 89         | W             | 7 1/2J       | 580                | 290                     | 629                   | 218                | 7.0              |
|              | 215/50R18 XL  | 96         | W             | 7J           | 710                | 290                     | 673                   | 226                | 7.0              |
|              | ○215/55R18 XL | 99         | W             | 7J           | 775                | 290                     | 693                   | 226                | -                |
|              | ○225/40R18 XL | 92         | W             | 8J           | 630                | 290                     | 637                   | 230                | -                |
|              | ○225/45R18 XL | 95         | W             | 7 1/2J       | 690                | 290                     | 659                   | 225                | -                |
|              | 235/45R18 XL  | 98         | W             | 8J           | 750                | 290                     | 669                   | 236                | 7.0              |
| 19           | 235/55R18     | 100        | W             | 7 1/2J       | 800                | 250                     | 715                   | 245                | 7.0              |
|              | 245/40R18 XL  | 97         | W             | 8 1/2J       | 730                | 290                     | 653                   | 248                | 7.0              |
|              | ○225/35R19 XL | 88         | W             | 8J           | 560                | 290                     | 641                   | 230                | -                |
|              | 225/45R19 XL  | 96         | W             | 7 1/2J       | 710                | 290                     | 685                   | 225                | 7.0              |
|              | ○235/35R19 XL | 91         | W             | 8 1/2J       | 615                | 290                     | 647                   | 241                | -                |
| 245/45R19 XL | 102           | W          | 8J            | 850          | 290                | 703                     | 243                   | 7.0                |                  |

○ : In development

M+S



# TRAILER TIRE



# CROSSWIND R781

BUDGET TIRE

- Low fuel consumption;
- Specially designed for trailer.

| RIM | Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|-------------|------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 13  | ST175/80R13 | 6PR        | 91/87      | M             | 5J           | D 545 S 615        | 350                     | 610                   | 177                | 6.1              |
| 14  | ST205/75R14 | 6PR        | 100/96     | M             | 5 1/2J       | D 710S 800         | 350                     | 664                   | 203                | 6.1              |
|     | ST215/75R14 | 6PR        | 102/98     | M             | 6J           | D 750S 850         | 350                     | 678                   | 216                | 6.1              |
| 15  | ST205/75R15 | 8PR        | 107/102    | M             | 5 1/2J       | D 850S 975         | 450                     | 689                   | 203                | 6.1              |
|     | ST205/75R15 | 6PR        | 101/97     | M             | 5 1/2J       | D 730S 825         | 350                     | 689                   | 203                | 6.1              |
|     | ST225/75R15 | 8PR        | 113/108    | M             | 6J           | D 1000S 1150       | 450                     | 719                   | 223                | 6.1              |
| 16  | ST225/75R15 | 10PR       | 117/112    | M             | 6J           | D 1120S 1285       | 550                     | 719                   | 223                | 6.1              |
|     | ST235/80R16 | 10PR       | 123/119    | M             | 6 1/2J       | D 1360S 1550       | 550                     | 782                   | 235                | 6.1              |
|     | ST235/85R16 | 10PR       | 125/121    | M             | 6 1/2J       | D 1450S 1650       | 550                     | 806                   | 235                | 6.1              |

M+S



# RADIAL R701

BUDGET TIRE


- Low fuel consumption;
- Budget Tires.

| RIM        | Size         | Ply Rating | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|------------|--------------|------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 10         | 195/55R10C   | /          | 98/96      | N             | 6J           | D 710S 750         | 625                     | 468                   | 201                | 6.5              |
| 12         | 155/70R12    | /          | 73         | S             | 4.50B        | 365                | 250                     | 523                   | 157                | 6.2              |
|            | ○ 175/70R12  | /          | 80         | H             | 5.00B        | 450                | 250                     | 551                   | 177                | -                |
|            | 155/70R12C   | /          | 100/98     | N             | 4 1/2J       | D 750S 800         | 650                     | 523                   | 157                | 6.5              |
|            | 155/70R12C   | /          | 104/102    | N             | 4 1/2J       | D 850S 900         | 625                     | 523                   | 157                | 6.5              |
|            | 185/60R12C   | /          | 104/101    | N             | 5 1/2J       | D 825S 900         | 650                     | 527                   | 189                | 6.5              |
| 13         | 195/60R12C   | /          | 104/102    | N             | 6J           | D 850S 900         | 650                     | 539                   | 202                | 6.5              |
|            | 135/80R13 XL | /          | 74         | N             | 3.50B        | 375                | 280                     | 546                   | 133                | 6.2              |
|            | 145/70R13    | /          | 74         | N             | 4.50J        | 345                | 250                     | 534                   | 150                | 6.2              |
|            | 145/80R13 XL | /          | 79         | N             | 4.00B        | 437                | 280                     | 562                   | 145                | 6.2              |
|            | 155/70R13    | /          | 75         | N             | 4.50B        | 387                | 250                     | 548                   | 157                | 6.2              |
|            | 155/80R13 XL | /          | 84         | N             | 4.50B        | 500                | 280                     | 578                   | 157                | 6.2              |
|            | ○ 165/60R13  | /          | 73         | T             | 5.00B        | 365                | 250                     | 528                   | 170                | -                |
|            | 165/65R13    | /          | 77         | N             | 5.00B        | 412                | 250                     | 544                   | 170                | 6.2              |
|            | 165/70R13    | /          | 79         | N             | 5.00B        | 437                | 250                     | 562                   | 170                | 6.2              |
|            | 175/70R13    | /          | 82         | N/H           | 5.00B        | 475                | 250                     | 576                   | 177                | 6.2              |
|            | 175/70R13 XL | /          | 86         | N             | 5.00B        | 530                | 290                     | 576                   | 177                | 6.2              |
|            | 185/70R13    | /          | 86         | N             | 5 1/2J       | 530                | 250                     | 590                   | 189                | 6.2              |
|            | 165R13C      | 8PR        | 94/92      | N             | 4 1/2J       | D 630S 670         | 450                     | 596                   | 167                | 6.5              |
|            | 165R13C      | 8PR        | 96/94      | N             | 4 1/2J       | D 670S 710         | 450                     | 596                   | 167                | 6.5              |
|            | 185/70R13C   | /          | 106/104    | N             | 5 1/2J       | D 900S 950         | 600                     | 590                   | 189                | 6                |
| 195/50R13C | /            | 104/101    | N          | 6J            | D 825S 900   | 650                | 526                     | 201                   | 6.5                |                  |
| 14         | 165/55R14    | /          | 72         | H             | 5J           | 355                | 250                     | 538                   | 170                | 6.2              |
|            | 175/65R14    | /          | 82         | T/H           | 5J           | 475                | 250                     | 584                   | 177                | 6.2              |
|            | 185/60R14    | /          | 82         | H             | 5 1/2J       | 475                | 250                     | 578                   | 189                | 6.2              |
|            | ○ 185/65R14  | /          | 86         | T             | 5 1/2J       | 530                | 250                     | 596                   | 189                | -                |
|            | ○ 185/70R14  | /          | 88         | T             | 5 1/2J       | 560                | 250                     | 616                   | 189                | -                |
|            | ○ 195/70R14  | /          | 91         | T             | 6J           | 615                | 250                     | 630                   | 201                | -                |
|            | 195/70R14 XL | /          | 96         | N             | 6J           | 710                | 290                     | 630                   | 201                | 6.2              |
|            | 165R14LT     | 6PR        | 91/90      | S             | 4 1/2J       | D 600S 615         | 350                     | 620                   | 165                | 7.3              |
|            | 165R14LT     | 8PR        | 96/95      | T             | 4 1/2J       | D 690S 710         | 450                     | 620                   | 165                | 7.3              |
|            | 185R14C      | 8PR        | 102/100    | N             | 5 1/2J       | D 800S 850         | 450                     | 650                   | 188                | 6.5              |
| 15         | 185R14C      | /          | 104/102    | N             | 5 1/2J       | D 850S 900         | 500                     | 650                   | 188                | 6.5              |
|            | 195R14C      | 8PR        | 106/104    | N             | 5J           | D 900S 950         | 450                     | 666                   | 198                | 6.5              |
|            | ○ 185/65R15  | /          | 88         | T             | 5 1/2J       | 560                | 250                     | 621                   | 189                | -                |
|            | ○ 195/50R15  | /          | 82         | H             | 6J           | 475                | 250                     | 577                   | 201                | -                |
|            | 195/55R15    | /          | 85         | H             | 6J           | 515                | 250                     | 595                   | 201                | 6.2              |
|            | 195/60R15    | /          | 88         | H             | 6J           | 560                | 250                     | 615                   | 201                | 6.2              |
|            | ○ 195/65R15  | /          | 91         | H             | 6J           | 615                | 250                     | 635                   | 201                | -                |
|            | ○ 205/60R15  | /          | 91         | H             | 6J           | 615                | 250                     | 627                   | 209                | -                |
|            | ○ 205/65R15  | /          | 94         | H             | 6J           | 670                | 250                     | 647                   | 209                | -                |
|            | ○ 205/70R15  | /          | 96         | T             | 6J           | 710                | 250                     | 669                   | 209                | -                |
| 16         | ○ 205/75R15  | /          | 97         | S             | 5 1/2J       | 730                | 250                     | 689                   | 203                | -                |
|            | ○ 205/55R16  | /          | 91         | H             | 6 1/2J       | 615                | 250                     | 632                   | 214                | -                |
|            | ○ 205/60R16  | /          | 92         | H             | 6J           | 630                | 250                     | 652                   | 209                | -                |
|            | ○ 205/65R16  | /          | 95         | H             | 6J           | 690                | 250                     | 672                   | 209                | -                |

M+S

○ : In development

# LIGHT TRUCK TIRE

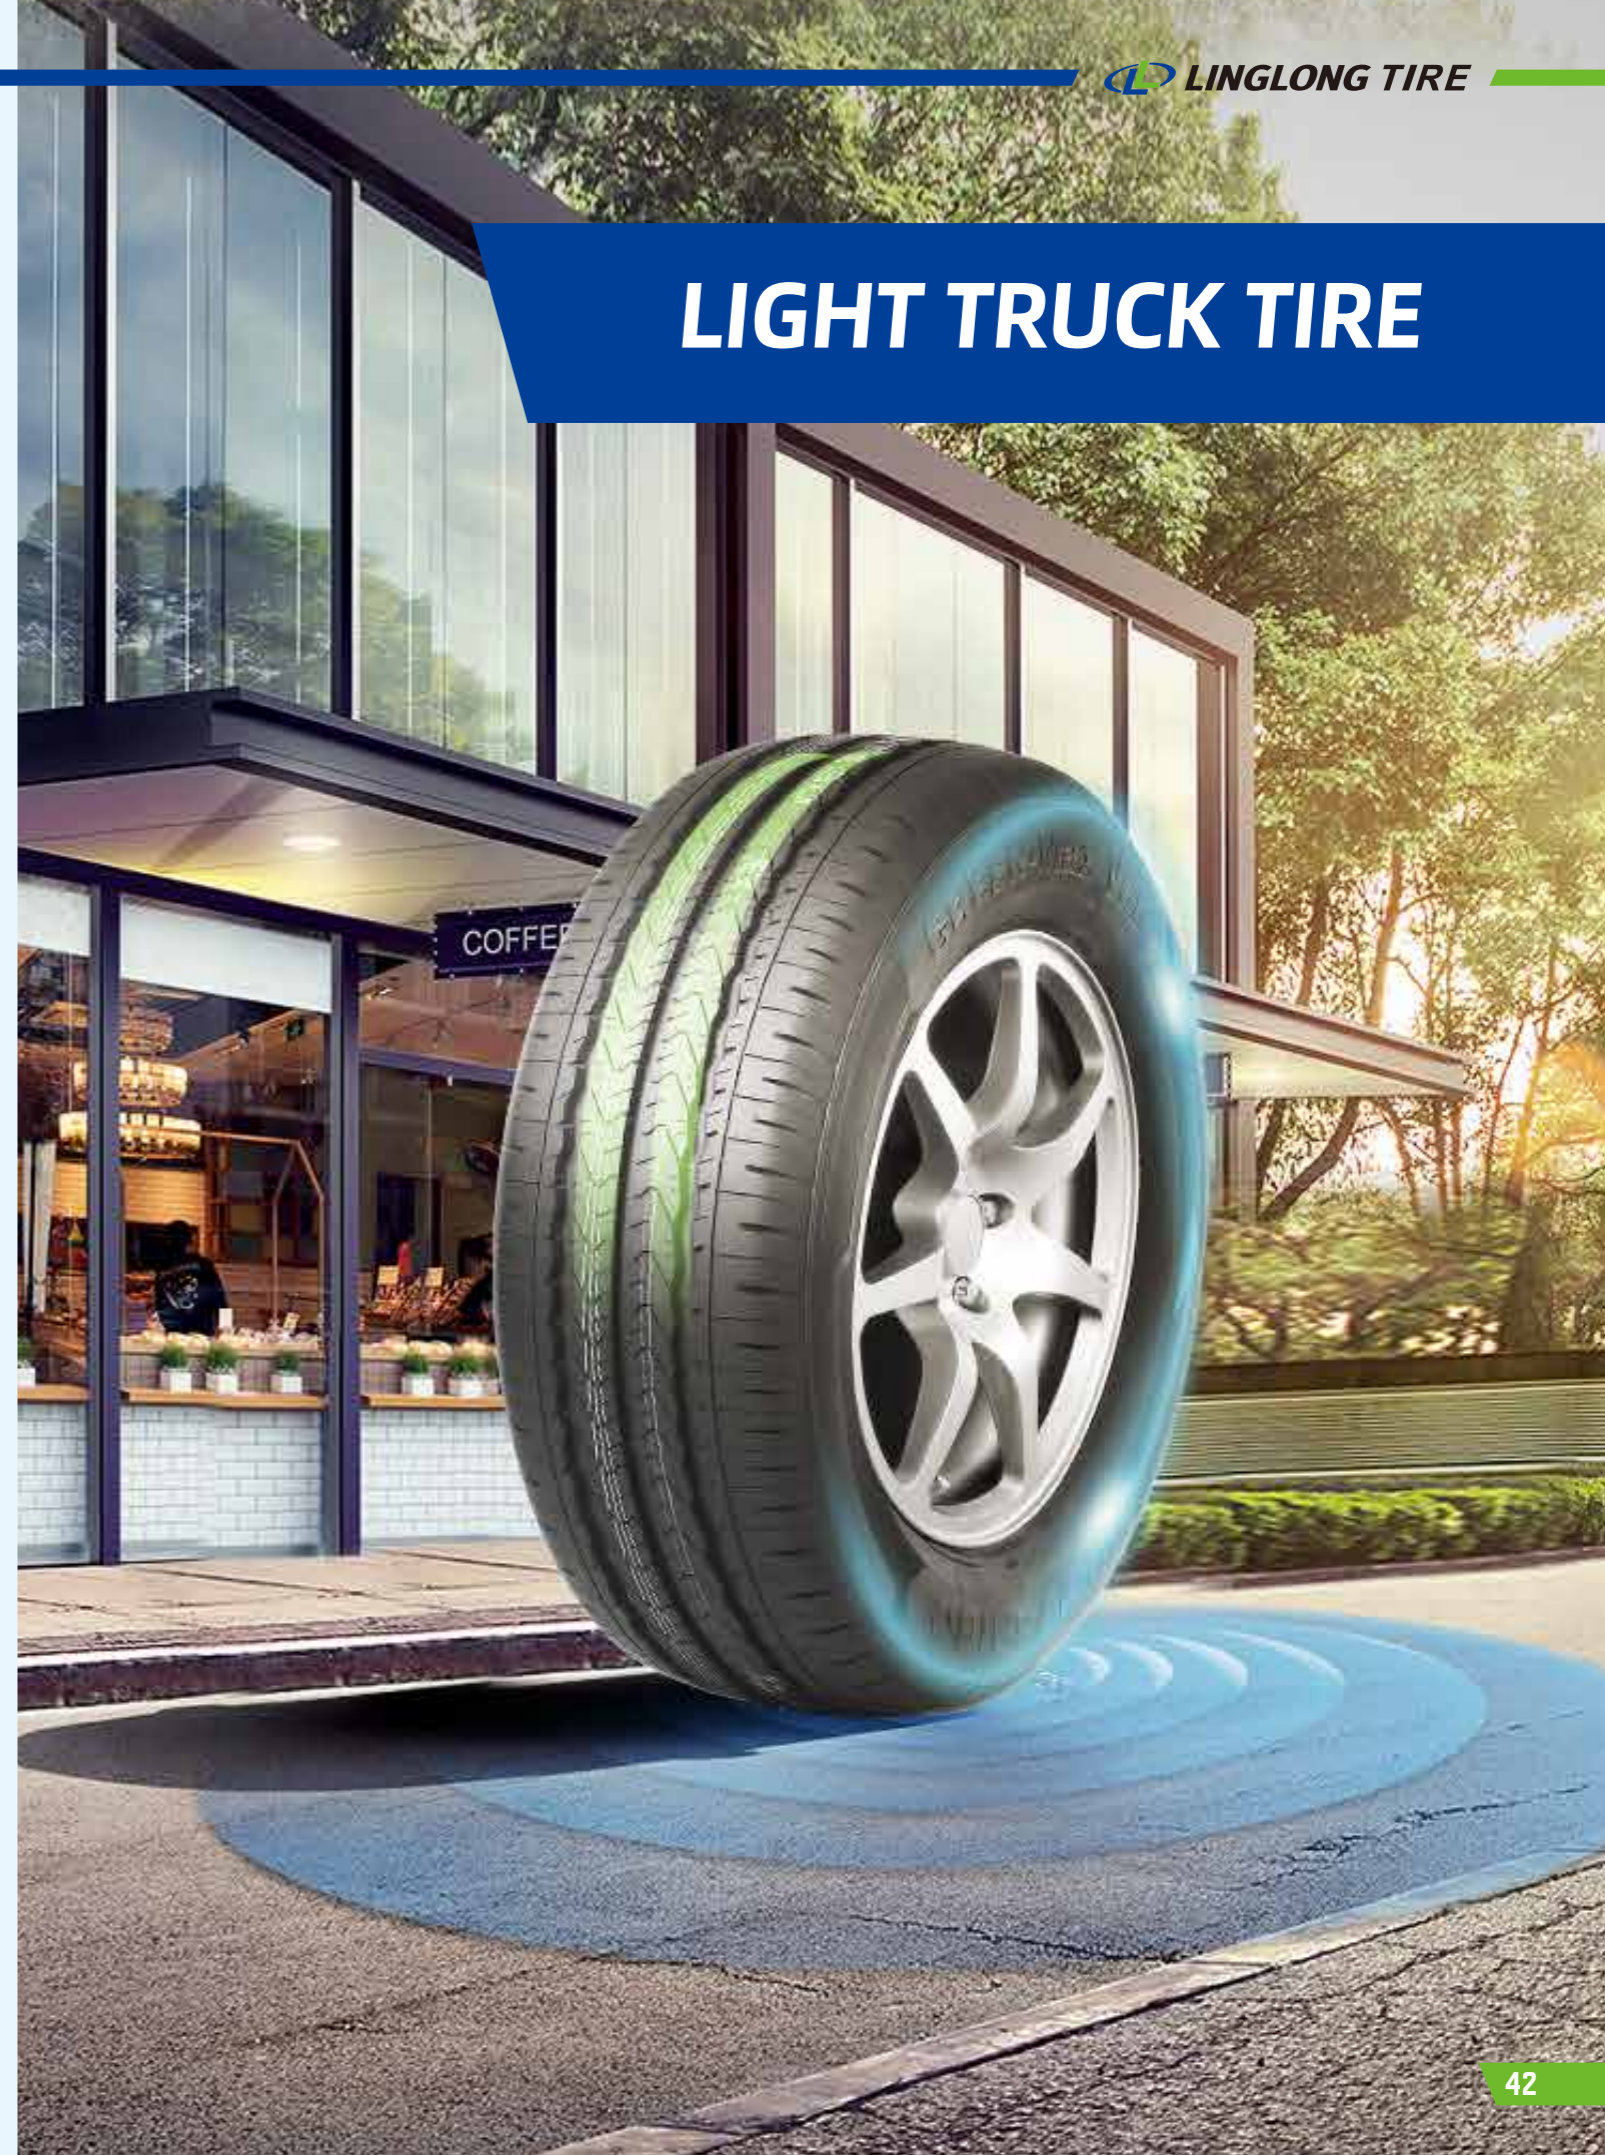



## GREEN-Max Van PLUS

COMMERCIAL TIRE WITH HIGH GRIP PERFORMANCE

- Better grip performance;
- Low rolling resistance for higher energy efficiency;
- Excellent wear resistance performance.

| RIM | Size       | Ply Rating | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|------------|------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 12  | 145R12C    | 8PR        | 86/84      | Q             | 4.00B        | D 500S 530         | 450                     | 537                   | 145                | 7.5              |
| 13  | 165R13C    | 8PR        | 94/93      | R             | 4 1/2J       | D 650S 670         | 450                     | 594                   | 165                | 7.7              |
| 14  | 195R14C    | 8PR        | 106/104    | P             | 5 1/2J       | D 900 S 950        | 450                     | 666                   | 198                | 9.3              |
| 15  | 205/70R15C | 8PR        | 106/104    | S             | 6J           | D 900 S 950        | 450                     | 669                   | 209                | 9.1              |
|     | 215/70R15C | 8PR        | 109/107    | R             | 6 1/2J       | D 975S 1030        | 450                     | 683                   | 221                | 9.4              |



## GREEN-Max Van HP

COMMERCIAL TIRE WITH HIGH GRIP PERFORMANCE

- Excellent stability;
- Great grip performance and driving force of turning;
- Low rolling resistance for higher energy efficiency.

| RIM | Size       | Ply Rating | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|------------|------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 14  | 175/65R14C | 6PR        | 90/88      | T             | 5J           | D 560S 600         | 375                     | 584                   | 177                | 7.5              |
| 15  | 215/65R15C | 6PR        | 104/102    | T             | 6 1/2J       | D 850S 900         | 375                     | 661                   | 221                | 9                |
| 16  | 195/65R16C | 8PR        | 104/102    | R             | 6J           | D 850 S 900        | 475                     | 660                   | 201                | 8.8              |
|     | 205/65R16C | 8PR        | 107/105    | R             | 6J           | D 925 S 975        | 475                     | 672                   | 209                | 9                |
|     | 215/60R16C | 6PR        | 103/101    | T             | 6 1/2J       | D 825S 875         | 375                     | 664                   | 221                | 9                |
|     | 215/65R16C | 8PR        | 109/107    | R             | 6 1/2J       | D 975 S 1030       | 475                     | 686                   | 221                | 9                |
|     | 225/65R16C | 8PR        | 112/110    | R             | 6 1/2J       | D 1060 S 1120      | 475                     | 698                   | 228                | 9                |
|     | 235/65R16C | 8PR        | 115/113    | R             | 7J           | D 1150 S 1215      | 475                     | 712                   | 240                | 9                |



## RADIAL666

COMMERCIAL TIRE WITH EXCELLENT WEAR AND WET PERFORMANCE

- Excellent traction;
- Excellent wet braking;
- High wear resistance.

| RIM        | Size          | Ply Rating | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|------------|---------------|------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 12         | 155R12C       | 6PR        | 83/81      | N             | 4.50B        | D 462S 487         | 350                     | 553                   | 157                | 7.5              |
| 13         | 175R13LT      | 8PR        | 97/95      | Q             | 5.00B        | D 690S 730         | 450                     | 609                   | 182                | 7.5              |
| 14         | 165/70R14C    | 6PR        | 89/87      | R             | 5J           | D 545S 580         | 375                     | 588                   | 170                | 8.1              |
|            | 185R14C       | 8PR        | 102/100    | R/Q           | 5 1/2J       | D 800S 850         | 450                     | 652                   | 189                | 9.3              |
|            | 185R14LT      | 6PR        | 97/95      | R             | 5 1/2J       | D 690S 730         | 350                     | 652                   | 189                | 9.3              |
|            | 185R14LT      | 8PR        | 102/100    | R             | 5 1/2J       | D 800S 850         | 450                     | 652                   | 189                | 9.3              |
|            | 195R14C       | 8PR        | 106/104    | P             | 5 1/2J       | D 900S 950         | 450                     | 668                   | 196                | 9.2              |
|            | 195R14C WR    | 8PR        | 106/104    | P             | 5 1/2J       | D 900S 950         | 450                     | 668                   | 196                | 9.2              |
|            | 195/75R14C    | 8PR        | 106/104    | R             | 5 1/2J       | D 900S 950         | 475                     | 648                   | 196                | 9.5              |
|            | 205/75R14C    | 8PR        | 109/107    | R             | 5 1/2J       | D 975S 1030        | 475                     | 664                   | 203                | 9                |
|            | 215R14C       | 8PR        | 110/108    | R             | 6J           | D 1000S 1060       | 450                     | 700                   | 218                | 9.5              |
| 215/75R14C | 8PR           | 112/110    | R          | 6J            | D 1060S 1120 | 475                | 678                     | 216                   | 9.5                |                  |
| 15         | 195R15C       | 8PR        | 106/104    | R             | 5 1/2J       | D 900S 950         | 450                     | 690                   | 198                | 8.3              |
|            | 195R15C WR    | 8PR        | 106/104    | R             | 5 1/2J       | D 900S 950         | 450                     | 690                   | 198                | 8.3              |
|            | 195/70R15C    | 8PR        | 104/102    | R             | 6J           | D 850S 900         | 450                     | 655                   | 201                | 10               |
|            | 195/70R15LT   | 10PR       | 104/102    | R             | 6J           | D 850S 900         | 550                     | 655                   | 201                | 10               |
|            | 205/70R15C    | 8PR        | 106/104    | S             | 6J           | D 900S 950         | 450                     | 669                   | 209                | 9                |
|            | 205/70R15C WR | 8PR        | 106/104    | S             | 6J           | D 950S 900         | 450                     | 669                   | 209                | 10               |
|            | 215/70R15C    | 8PR        | 109/107    | R             | 6 1/2J       | D 975S 1030        | 450                     | 683                   | 221                | 9.5              |
|            | 215/70R15C WR | 8PR        | 109/107    | R             | 6 1/2J       | D 975S 1030        | 450                     | 683                   | 221                | 9.5              |
|            | 225/70R15C    | 8PR        | 112/110    | R             | 6 1/2J       | D 1060S 1120       | 450                     | 697                   | 228                | 9                |
|            | 255/70R15C    | 6PR        | 112/110    | S             | 7 1/2J       | D 1060S 1120       | 375                     | 739                   | 260                | 9.5              |
| 16         | 175/75R16C    | 8PR        | 101/99     | R             | 5J           | D 775S 825         | 475                     | 668                   | 177                | 8.1              |
|            | 185/75R16C    | 8PR        | 104/102    | R             | 5J           | D 850S 900         | 475                     | 684                   | 184                | 8.1              |
|            | 195/65R16C    | 8PR        | 104/102    | R             | 6J           | D 850S 900         | 475                     | 660                   | 201                | 9                |
|            | 195/75R16C    | 8PR        | 107/105    | R             | 5 1/2J       | D 925S 975         | 475                     | 698                   | 196                | 9.5              |
|            | 205/65R16C    | 8PR        | 107/105    | R             | 6J           | D 925S 975         | 475                     | 672                   | 209                | 9                |
|            | 205/75R16C    | 8PR        | 110/108    | R             | 5 1/2J       | D 1000S 1060       | 475                     | 714                   | 203                | 9                |
|            | 215/65R16C    | 8PR        | 109/107    | R             | 6 1/2J       | D 975S 1030        | 475                     | 686                   | 221                | 9                |
|            | 215/70R16C    | 6PR        | 108/106    | S             | 6 1/2J       | D 950S 1000        | 375                     | 708                   | 221                | 9.3              |
|            | 215/75R16C    | 8PR        | 113/111    | R             | 6J           | D 1090S 1150       | 475                     | 728                   | 216                | 9                |
|            | 225/65R16C    | 8PR        | 112/110    | R             | 6 1/2J       | D 1060S 1120       | 475                     | 698                   | 228                | 9.1              |
|            | 225/75R16C    | 10PR       | 121/120    | R             | 6J           | D 1400S 1450       | 575                     | 744                   | 223                | 9                |
| 235/65R16C | 8PR           | 115/113    | R          | 7J            | D 1150S 1215 | 475                | 712                     | 240                   | 9                  |                  |

M+S



# GREEN-Max Van

COMMERCIAL TIRE WITH HIGH GRIP PERFORMANCE

- Better grip performance;
- Low rolling resistance for high energy efficiency.

| RIM | Size         | Ply Rating | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|--------------|------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 12  | 5.00R12LT    | 10PR       | 88/86      | P             | 3.50B        | D 530S 560         | 550                     | 568                   | 143                | 7.5              |
|     | 155R12C      | 8PR        | 88/86      | N             | 4.50B        | D 530S 560         | 450                     | 553                   | 157                | 7.8              |
| 13  | 155R13C      | 8PR        | 91/89      | P             | 41/2J        | D 580S 615         | 450                     | 578                   | 157                | 7.8              |
|     | 165R13C      | 8PR        | 94/93      | R             | 41/2J        | D 650S 670         | 450                     | 594                   | 165                | 7.7              |
|     | 165/70R13LT  | 8PR        | 88/85      | S             | 5.00B        | D 515S 560         | 450                     | 562                   | 170                | 7.3              |
|     | 175R13C      | 8PR        | 97/95      | Q             | 5.00B        | D 690S 730         | 450                     | 610                   | 177                | 8.1              |
| 14  | 165/70R14 XL | /          | 85         | H             | 5J           | 515                | 290                     | 588                   | 170                | 7.7              |
|     | 185/65R14 XL | /          | 90         | H             | 5 1/2J       | 600                | 290                     | 596                   | 189                | 7.7              |
|     | 185/70R14 XL | /          | 92         | H             | 5 1/2J       | 630                | 290                     | 616                   | 189                | 7.7              |
|     | 165/70R14C   | 6PR        | 89/87      | R             | 5J           | D 545S 580         | 375                     | 588                   | 170                | 7.8              |
|     | 175R14LT     | 8PR        | 99/97      | R             | 5J           | D 730S 775         | 450                     | 636                   | 177                | 8                |
|     | 175/70R14C   | 6PR        | 95/93      | T             | 5J           | D 650S 690         | 375                     | 602                   | 177                | 7.8              |
|     | 175/75R14LT  | 8PR        | 94/91      | S             | 5J           | D 615S 670         | 450                     | 618                   | 177                | 7.5              |
|     | 185R14C      | 8PR        | 102/100    | R             | 5 1/2J       | D 800 S 850        | 450                     | 650                   | 188                | 8.5              |
|     | 195R14C      | 8PR        | 106/104    | P             | 5 1/2J       | D 900 S 950        | 450                     | 666                   | 198                | 8.7              |
|     | 205R14C      | 8PR        | 109/107    | R             | 6J           | D 975 S 1030       | 450                     | 686                   | 208                | 9.1              |
| 15  | 215R14C      | 8PR        | 112/110    | R             | 6J           | D 1060S 1120       | 450                     | 700                   | 216                | 9                |
|     | 185R15LT     | 8PR        | 103/102    | R             | 5 1/2J       | D 850 S 875        | 450                     | 677                   | 189                | 8.5              |
|     | 195R15C      | 8PR        | 106/104    | R             | 5 1/2J       | D 900 S 950        | 450                     | 693                   | 196                | 9                |
|     | 195/70R15C   | 8PR        | 104/102    | R             | 6J           | D 850 S 900        | 450                     | 655                   | 201                | 9.6              |
|     | 205/70R15C   | 8PR        | 106/104    | S             | 6J           | D 900 S 950        | 450                     | 669                   | 209                | 9.1              |
|     | 215/70R15C   | 8PR        | 109/107    | R             | 6 1/2J       | D 975 S 1030       | 450                     | 683                   | 221                | 9                |
|     | 225/70R15C   | 8PR        | 112/110    | R             | 6 1/2J       | D 1060 S 1120      | 450                     | 697                   | 228                | 9.6              |
| 16  | 255/70R15C   | 6PR        | 112/110    | S             | 7 1/2J       | D 1060S 1120       | 375                     | 739                   | 260                | 9.5              |
|     | 185/75R16C   | 8PR        | 104/102    | R             | 5J           | D 850 S 900        | 475                     | 684                   | 184                | 9.1              |
|     | 195/75R16C   | 8PR        | 107/105    | R             | 5 1/2J       | D 925 S 975        | 475                     | 698                   | 196                | 9.6              |
|     | 205/75R16C   | 8PR        | 110/108    | R             | 5 1/2J       | D 1000S 1060       | 475                     | 714                   | 203                | 9.1              |
|     | 215/70R16C   | 6PR        | 108/106    | T             | 6 1/2J       | D 950S 1000        | 375                     | 708                   | 221                | 9.1              |
|     | 215/75R16C   | 8PR        | 113/111    | R             | 6J           | D 1090S 1150       | 475                     | 728                   | 216                | 9.6              |
|     | 225/75R16C   | 10PR       | 121/120    | R             | 6J           | D 1400 S 1450      | 575                     | 744                   | 223                | 9.6              |
|     | 225/75R16LT  | 12PR       | 119/116    | R             | 6J           | D 1250 S 1360      | 650                     | 744                   | 223                | 9.6              |



# LMC4

INCREASED MILEAGE WITH HIGH WEAR RESISTANCE

- Excellent wear resistance performance.

| RIM | Size      | Ply Rating | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|-----------|------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 15  | 6.50R15LT | 8PR        | 101/97     | N             | 5.50F        | D 730 S 825        | 460                     | 730                   | 185                | 9.5              |
|     | 7.00R15LT | 10PR       | 110/105    | L             | 5.50F        | D 925 S 1060       | 560                     | 750                   | 200                | 9.5              |
| 16  | 6.50R16C  | 10PR       | 107/103    | N             | 5.50F        | D 875 S 975        | 560                     | 750                   | 185                | 9.5              |
|     | 6.50R16C  | 10PR       | 108/107    | L             | 5.50F        | D 975 S 1000       | 500                     | 750                   | 185                | 9.5              |
|     | 6.50R16C  | 12PR       | 110/105    | M             | 5.50F        | D 925 S 1060       | 670                     | 750                   | 185                | 9.5              |
|     | 7.50R16LT | 10PR       | 116/112    | L             | 6.00G        | D 1120 S 1250      | 560                     | 805                   | 215                | 11               |
|     | 7.50R16LT | 14PR       | 122/118    | L             | 6.00G        | D 1320 S 1500      | 770                     | 805                   | 215                | 11               |
|     | 7.50R16LT | 12PR       | 120/116    | M             | 5.50F        | D 1250 S 1400      | 670                     | 805                   | 215                | 11               |



# WINTER TIRE



# NORD MASTER



EXCELLENT SNOW HANDLING AND ICE BRAKING&ACCELERATION

- Directional grooves design for evacuate snow and mud;
- Complex soft tread compound and 3D sipes technology to promote handling performance on ice and snow condition.

| RIM | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 14  | 185/65R14 XL | 90         | T             | 5 1/2J       | 600                | 290                     | 596                   | 189                | 8.1              |
|     | 185/65R15 XL | 92         | T             | 5 1/2J       | 630                | 290                     | 621                   | 189                | 8                |
| 15  | 195/65R15 XL | 95         | T             | 6J           | 690                | 290                     | 635                   | 201                | 8                |
|     | 205/55R16 XL | 94         | T             | 6 1/2J       | 670                | 290                     | 632                   | 214                | 8.1              |
| 16  | 205/60R16 XL | 96         | T             | 6J           | 710                | 290                     | 652                   | 209                | 8.1              |
|     | 215/65R16 XL | 102        | T             | 6 1/2J       | 850                | 290                     | 686                   | 221                | 8.1              |
| 17  | 205/40R17 XL | 84         | T             | 7 1/2J       | 500                | 290                     | 596                   | 212                | 8.1              |
|     | 205/45R17 XL | 88         | T             | 7J           | 560                | 290                     | 616                   | 206                | 8                |
|     | 205/55R17 XL | 95         | T             | 6 1/2J       | 690                | 290                     | 658                   | 214                | 8.1              |
|     | 215/50R17 XL | 95         | T             | 7J           | 690                | 290                     | 648                   | 226                | 8.1              |
|     | 215/55R17 XL | 98         | T             | 7J           | 750                | 290                     | 668                   | 226                | 8.1              |
|     | 225/45R17 XL | 94         | T             | 7 1/2J       | 670                | 290                     | 634                   | 225                | 8.1              |
|     | 225/50R17 XL | 98         | T             | 7J           | 750                | 290                     | 658                   | 233                | 8.1              |
|     | 225/55R17 XL | 101        | T             | 7J           | 825                | 290                     | 680                   | 233                | 8.1              |
|     | 245/40R17 XL | 95         | T             | 8 1/2J       | 690                | 290                     | 628                   | 248                | 8                |
|     | 225/40R18 XL | 92         | T             | 8J           | 630                | 290                     | 637                   | 230                | 8                |
| 18  | 225/45R18 XL | 95         | T             | 7 1/2J       | 690                | 290                     | 659                   | 225                | 8.1              |
|     | 235/45R18 XL | 98         | T             | 8J           | 750                | 290                     | 669                   | 236                | 8.1              |
|     | 255/35R18 XL | 94         | T             | 9J           | 670                | 290                     | 635                   | 260                | 8.1              |
|     | 265/35R18 XL | 97         | T             | 9 1/2J       | 730                | 290                     | 643                   | 271                | 8.7              |
| 19  | 215/35R19 XL | 85         | T             | 7 1/2J       | 515                | 290                     | 633                   | 218                | 8                |
|     | 225/35R19 XL | 88         | T             | 8J           | 560                | 290                     | 641                   | 230                | 8.1              |
|     | 225/45R19 XL | 96         | T             | 7 1/2J       | 710                | 290                     | 685                   | 225                | 8.1              |
|     | 235/35R19 XL | 91         | T             | 8 1/2J       | 615                | 290                     | 647                   | 241                | 8.1              |
|     | 245/35R19 XL | 93         | T             | 8 1/2J       | 650                | 290                     | 655                   | 248                | 8.1              |
|     | 245/40R19 XL | 98         | T             | 8 1/2J       | 750                | 290                     | 679                   | 248                | 8                |
|     | 255/35R19 XL | 96         | T             | 9J           | 710                | 290                     | 661                   | 260                | 8.1              |
| 20  | 255/35R20 XL | 97         | T             | 9J           | 730                | 290                     | 686                   | 260                | 8                |
|     | 275/35R20 XL | 102        | T             | 9 1/2J       | 850                | 290                     | 700                   | 278                | 8.1              |
|     | 275/50R20 XL | 113        | T             | 8 1/2J       | 1150               | 290                     | 784                   | 284                | 8.6              |



# GREEN-Max Winter Grip SUV

STUDDABLE SNOW TIRE WITH OUTSTANDING BRAKING PERFORMANCE ON ICE&SNOW CONDITION

- Designed for ice and snow surface;
- Excellent snow traction performance with directional tread pattern design;
- Great grip and handling performance on ice and snow surface;
- Designed for SUVs.

| RIM | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 17  | 225/65R17 XL | 106        | T             | 6 1/2J       | 950                | 290                     | 724                   | 228                | 9.7              |
|     | 235/60R17 XL | 106        | T             | 7J           | 950                | 290                     | 714                   | 240                | 9.7              |
|     | 235/65R17 XL | 108        | T             | 7J           | 1000               | 290                     | 738                   | 240                | 9.7              |
|     | 265/70R17    | 115        | T             | 8J           | 1215               | 250                     | 804                   | 272                | 9.7              |
| 18  | 225/55R18    | 98         | T             | 7J           | 750                | 250                     | 705                   | 233                | 9.7              |
|     | 275/60R18 XL | 117        | T             | 8J           | 1285               | 290                     | 787                   | 279                | 9.7              |
|     | 255/55R18 XL | 109        | T             | 8J           | 1030               | 290                     | 737                   | 265                | 9.7              |
| 20  | 275/45R20 XL | 110        | T             | 9J           | 1060               | 290                     | 756                   | 273                | 9.7              |
|     | 275/55R20 XL | 117        | T             | 8 1/2J       | 1285               | 290                     | 810                   | 284                | 9.7              |



# GREEN-Max Winter UHP

ULTRA HIGH PERFORMANCE SNOW TIRES WITH SUPERIOR HANDLING PERFORMANCE

- Excellent snow handling performance.

| RIM | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 15  | 185/55R15 XL | 86         | H             | 6J           | 530                | 290                     | 585                   | 194                | 8.3              |
|     | 195/50R15    | 82         | H             | 6J           | 475                | 250                     | 577                   | 201                | 8.3              |
|     | 195/55R15    | 85         | H             | 6J           | 515                | 250                     | 595                   | 201                | 8.6              |
| 16  | 195/55R16 XL | 91         | H             | 6J           | 615                | 290                     | 620                   | 201                | 8.6              |
|     | 225/55R16 XL | 99         | H             | 7J           | 775                | 290                     | 654                   | 233                | 8.6              |
|     | 225/60R16 XL | 102        | H             | 6 1/2J       | 850                | 290                     | 676                   | 228                | 8.6              |
| 17  | 205/45R17 XL | 88         | V             | 7J           | 560                | 290                     | 616                   | 206                | 8.6              |
|     | 205/50R17 XL | 93         | V             | 6 1/2J       | 650                | 290                     | 638                   | 214                | 8.6              |
|     | 215/45R17 XL | 91         | V             | 7J           | 615                | 290                     | 626                   | 213                | 8.6              |
|     | 215/50R17 XL | 95         | V             | 7J           | 690                | 290                     | 648                   | 226                | 8.6              |
|     | 215/55R17    | 94         | V             | 7J           | 670                | 250                     | 668                   | 226                | 8.6              |
|     | 215/60R17    | 96         | H             | 6 1/2J       | 710                | 250                     | 690                   | 221                | 8.6              |
|     | 225/45R17 XL | 94         | V             | 7 1/2J       | 670                | 290                     | 634                   | 225                | 8.6              |
|     | 225/50R17 XL | 98         | V             | 7J           | 750                | 290                     | 658                   | 233                | 8.6              |
|     | 225/55R17 XL | 101        | V             | 7J           | 825                | 290                     | 680                   | 233                | 8.6              |
|     | 235/45R17 XL | 97         | H             | 8J           | 730                | 290                     | 644                   | 236                | 8.6              |
| 18  | 235/55R17 XL | 103        | V             | 7 1/2J       | 875                | 290                     | 690                   | 245                | 8.6              |
|     | 225/40R18 XL | 92         | V             | 8J           | 630                | 290                     | 637                   | 230                | 8.6              |
|     | 225/45R18 XL | 95         | H             | 7 1/2J       | 690                | 290                     | 659                   | 225                | 8.6              |
|     | 235/45R18 XL | 98         | V             | 8J           | 750                | 290                     | 669                   | 236                | 8.6              |
|     | 235/55R18 XL | 104        | H             | 7 1/2J       | 900                | 290                     | 715                   | 245                | 8.6              |
|     | 235/60R18 XL | 107        | H             | 7J           | 975                | 290                     | 739                   | 240                | 8.6              |
|     | 245/40R18 XL | 97         | V             | 8 1/2J       | 730                | 290                     | 653                   | 248                | 8.6              |
|     | 245/45R18 XL | 100        | H             | 8J           | 800                | 290                     | 677                   | 243                | 8.6              |
|     | 235/55R19 XL | 105        | V             | 7 1/2J       | 925                | 290                     | 741                   | 245                | 8.1              |
|     | 245/40R19 XL | 98         | V             | 8 1/2J       | 750                | 290                     | 679                   | 248                | 8.1              |
| 19  | 245/45R19 XL | 102        | V             | 8J           | 850                | 290                     | 703                   | 243                | 8.1              |
|     | 255/35R19 XL | 96         | V             | 9J           | 710                | 290                     | 661                   | 260                | 8.1              |
|     | 255/40R19 XL | 100        | V             | 9J           | 800                | 290                     | 687                   | 260                | 8.1              |
|     | 255/45R19 XL | 104        | H             | 8 1/2J       | 900                | 290                     | 713                   | 255                | 8.6              |
|     | 255/50R19 XL | 107        | V             | 8J           | 975                | 290                     | 739                   | 265                | 8.1              |
|     | 255/55R19 XL | 111        | H             | 8J           | 1090               | 290                     | 763                   | 265                | 8.6              |
|     | 275/40R19 XL | 105        | V             | 9 1/2J       | 925                | 290                     | 703                   | 278                | 8.1              |
| 20  | 245/45R20 XL | 103        | H             | 8J           | 875                | 290                     | 728                   | 243                | 8.6              |
|     | 255/35R20 XL | 97         | V             | 9J           | 730                | 290                     | 686                   | 260                | 8.1              |
|     | 275/40R20 XL | 106        | V             | 9 1/2J       | 950                | 290                     | 728                   | 278                | 8.1              |
|     | 275/45R20 XL | 110        | H             | 9J           | 1060               | 290                     | 756                   | 273                | 8.6              |
|     | 315/35R20 XL | 110        | V             | 11J          | 1060               | 290                     | 728                   | 320                | 8.1              |





## GREEN-Max Winter HP

HIGH PERFORMANCE SNOW TIRES WITH EXCELLENT BRAKING PERFORMANCE

- Excellent snow braking performance;
- Comfortably snow driving.

| RIM | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 13  | 155/70R13    | 75         | T             | 4.50B        | 387                | 250                     | 548                   | 157                | 8.2              |
|     | 155/80R13    | 79         | T             | 4.50B        | 437                | 240                     | 578                   | 157                | 8.2              |
|     | 165/70R13    | 79         | T             | 5.00B        | 437                | 250                     | 562                   | 170                | 8.2              |
|     | 175/70R13    | 82         | T             | 5.00B        | 475                | 250                     | 576                   | 177                | 8.2              |
| 14  | 155/65R14    | 75         | T             | 4 1/2J       | 387                | 250                     | 558                   | 157                | 8.2              |
|     | 165/65R14    | 79         | T             | 5J           | 437                | 250                     | 570                   | 170                | 8.2              |
|     | 165/70R14    | 81         | T             | 5J           | 462                | 250                     | 588                   | 170                | 8.2              |
|     | 175/65R14 XL | 86         | H             | 5J           | 530                | 290                     | 584                   | 177                | 8.2              |
|     | 175/70R14    | 84         | T             | 5J           | 500                | 250                     | 602                   | 177                | 8.2              |
|     | 185/60R14    | 82         | T             | 5 1/2J       | 475                | 250                     | 578                   | 189                | 8.5              |
| 15  | 185/65R14    | 86         | T             | 5 1/2J       | 530                | 250                     | 596                   | 189                | 8.5              |
|     | 175/65R15 XL | 88         | H             | 5J           | 560                | 290                     | 609                   | 177                | 8.0              |
|     | 185/60R15 XL | 88         | H             | 5 1/2J       | 560                | 290                     | 603                   | 189                | 8.5              |
|     | 185/65R15 XL | 92         | H             | 5 1/2J       | 630                | 290                     | 621                   | 189                | 8.5              |
|     | 195/60R15 XL | 92         | H             | 6J           | 630                | 290                     | 615                   | 201                | 8.5              |
|     | 195/65R15 XL | 95         | T             | 6J           | 690                | 290                     | 635                   | 201                | 8.5              |
|     | 205/65R15 XL | 99         | H             | 6J           | 775                | 290                     | 647                   | 209                | 8.5              |
|     | 205/70R15    | 96         | T             | 6J           | 710                | 250                     | 669                   | 209                | 8.5              |
| 16  | 205/55R16 XL | 94         | H             | 6 1/2J       | 670                | 290                     | 632                   | 214                | 8.5              |
|     | 205/60R16 XL | 96         | H             | 6J           | 710                | 290                     | 652                   | 209                | 8.5              |
|     | 215/55R16 XL | 97         | H             | 7J           | 730                | 290                     | 642                   | 226                | 8.5              |
|     | 215/60R16 XL | 99         | H             | 6 1/2J       | 775                | 290                     | 664                   | 221                | 8.5              |
|     | 215/65R16    | 98         | H             | 6 1/2J       | 750                | 250                     | 686                   | 221                | 8.5              |



## GREEN-Max Winter Van

EXCELLENT SNOW TRACTION PERFORMANCE

- Excellent snow traction performance;
- Focus on driving safety of vehicles in winter.

| RIM | Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|-------------|------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 13  | 165R13C     | 6PR        | 89/88      | Q             | 4.50B        | D 560S 580         | 350                     | 594                   | 165                | 8                |
| 14  | 175R14C     | 6PR        | 94/92      | Q             | 5J           | D 630S 670         | 350                     | 636                   | 177                | 8                |
|     | 185R14C     | 8PR        | 102/100    | Q             | 6J           | D 800 S 850        | 450                     | 652                   | 189                | 9.6              |
|     | 195R14C     | 8PR        | 106/104    | P             | 5 1/2J       | D 900 S 950        | 450                     | 666                   | 198                | 9.8              |
| 15  | 195/70R15C  | 8PR        | 104/102    | R             | 6J           | D 850 S 900        | 450                     | 655                   | 201                | 10               |
|     | 225/70R15LT | 8PR        | 106/103    | R             | 6 1/2J       | D 875 S 950        | 450                     | 697                   | 228                | 10               |
|     | 225/70R15C  | 8PR        | 112/110    | R             | 6 1/2J       | D 1060 S 1120      | 450                     | 697                   | 228                | 10               |
| 16  | 175/75R16C  | 8PR        | 101/99     | R             | 5J           | D 775 S 825        | 475                     | 668                   | 177                | 9.6              |
|     | 185/75R16C  | 8PR        | 104/102    | R             | 5J           | D 850 S 900        | 475                     | 684                   | 184                | 9.6              |
|     | 195/75R16C  | 8PR        | 107/105    | R             | 5 1/2J       | D 925 S 975        | 475                     | 698                   | 196                | 10               |
|     | 205/75R16C  | 8PR        | 110/108    | R             | 5 1/2J       | D 1000 S 1060      | 475                     | 714                   | 203                | 10               |
|     | 215/75R16C  | 8PR        | 113/111    | R             | 6J           | D 1090 S 1150      | 475                     | 728                   | 216                | 10               |
|     | 225/65R16C  | 8PR        | 112/110    | R             | 6 1/2J       | D 1060 S 1120      | 475                     | 698                   | 228                | 9.8              |
|     | 225/75R16C  | 10PR       | 121/120    | R             | 6J           | D 1400 S 1450      | 575                     | 744                   | 223                | 10               |
|     | 235/65R16C  | 10PR       | 121/119    | R             | 7J           | D 1360 S 1450      | 575                     | 712                   | 240                | 9.8              |



## GREEN-Max Winter Grip

STUDDABLE SNOW TIRE WITH OUTSTANDING BRAKING PERFORMANCE ON ICE & SNOW CONDITION

- Designed for ice and snow surface;
- Directional tread pattern design for excellent snow traction performance;
- Great grip and handling performance on ice and snow surface.

| RIM | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 13  | 155/70R13    | 75         | T             | 4.50B        | 387                | 250                     | 548                   | 157                | 9.7              |
|     | 155/80R13    | 79         | T             | 4.50B        | 437                | 240                     | 578                   | 157                | 9.7              |
|     | 165/70R13    | 79         | Q             | 5.00B        | 437                | 250                     | 562                   | 170                | 9.7              |
|     | 175/70R13    | 82         | T             | 5.00B        | 475                | 250                     | 576                   | 177                | 9.7              |
| 14  | 175/65R14 XL | 86         | T             | 5J           | 530                | 290                     | 584                   | 177                | 9.7              |
|     | 185/60R14    | 82         | T             | 5 1/2J       | 475                | 250                     | 578                   | 189                | 9.7              |
|     | 185/65R14 XL | 90         | T             | 5 1/2J       | 600                | 290                     | 596                   | 189                | 9.7              |
|     | 185/70R14 XL | 92         | T             | 5 1/2J       | 630                | 290                     | 616                   | 189                | 9.7              |
| 15  | 185/55R15 XL | 86         | T             | 6J           | 530                | 290                     | 585                   | 194                | 9.7              |
|     | 185/65R15    | 88         | T             | 5 1/2J       | 560                | 250                     | 621                   | 189                | 9.7              |
|     | 195/60R15 XL | 92         | T             | 6J           | 630                | 290                     | 615                   | 201                | 9.7              |
|     | 195/65R15 XL | 95         | T             | 6J           | 690                | 290                     | 635                   | 201                | 9.7              |
|     | 205/65R15 XL | 99         | T             | 6J           | 775                | 290                     | 647                   | 209                | 9.7              |
|     | 205/55R16 XL | 94         | T             | 6 1/2J       | 670                | 290                     | 632                   | 214                | 9.7              |
| 16  | 205/60R16 XL | 96         | T             | 6J           | 710                | 290                     | 652                   | 209                | 9.7              |
|     | 215/55R16 XL | 97         | T             | 7J           | 730                | 290                     | 642                   | 226                | 9.7              |
|     | 215/60R16    | 95         | T             | 6 1/2J       | 690                | 250                     | 664                   | 221                | 9.7              |
|     | 215/65R16    | 98         | T             | 6 1/2J       | 750                | 250                     | 686                   | 221                | 9.7              |
|     | 215/70R16 XL | 104        | T             | 6 1/2J       | 900                | 290                     | 708                   | 221                | 9.7              |
| 17  | 215/50R17 XL | 95         | T             | 7J           | 690                | 290                     | 648                   | 226                | 9.7              |
|     | 215/55R17 XL | 98         | T             | 7J           | 750                | 290                     | 668                   | 226                | 9.7              |
|     | 225/45R17 XL | 94         | T             | 7 1/2J       | 670                | 290                     | 634                   | 225                | 9.7              |
|     | 225/55R17    | 97         | T             | 7J           | 730                | 250                     | 680                   | 233                | 9.7              |





## GREEN-Max Winter GRIP 2

THE SECOND STUDDABLE SNOW TIRE WITH OUTSTANDING BRAKING PERFORMANCE ON ICE&SNOW CONDITION

- Designed for ice and snow surface;
- Directional tread pattern design for excellent snow traction performance;
- Great grip and handling performance on ice and snow surface.

| RIM | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 14  | 165/65R14    | 79         | T             | 5J           | 437                | 250                     | 570                   | 170                | 8.9              |
|     | 165/70R14    | 81         | T             | 5J           | 462                | 250                     | 588                   | 170                | 8.9              |
|     | 175/65R14 XL | 86         | T             | 5J           | 530                | 290                     | 584                   | 177                | 8.9              |
| 15  | 175/65R15    | 84         | T             | 5J           | 500                | 250                     | 609                   | 177                | 8.9              |
|     | 185/60R15    | 84         | T             | 5 1/2J       | 500                | 250                     | 603                   | 189                | 8.9              |
|     | 185/65R15    | 88         | T             | 5 1/2J       | 560                | 250                     | 621                   | 189                | 8.9              |
|     | 195/55R15 XL | 89         | T             | 6J           | 580                | 290                     | 595                   | 201                | 8.9              |
|     | 195/65R15 XL | 95         | T             | 6J           | 690                | 290                     | 635                   | 201                | 8.9              |
| 16  | 195/45R16 XL | 84         | T             | 6 1/2J       | 500                | 290                     | 582                   | 195                | 8.9              |
|     | 205/45R16 XL | 87         | T             | 7J           | 545                | 290                     | 590                   | 206                | 8.9              |
|     | 205/55R16 XL | 94         | T             | 6 1/2J       | 670                | 290                     | 632                   | 214                | 8.9              |
|     | 205/60R16 XL | 96         | T             | 6J           | 710                | 290                     | 652                   | 209                | 8.9              |
|     | 215/60R16    | 95         | T             | 6 1/2J       | 690                | 250                     | 664                   | 221                | 8.9              |
|     | 215/70R16    | 100        | T             | 6 1/2J       | 800                | 250                     | 708                   | 221                | 8.9              |
|     | 225/55R16 XL | 99         | T             | 7J           | 775                | 290                     | 654                   | 233                | 8.9              |
| 17  | 205/45R17 XL | 88         | T             | 7J           | 560                | 290                     | 616                   | 206                | 8.9              |
|     | 215/55R17 XL | 98         | T             | 7J           | 750                | 290                     | 642                   | 226                | 8.9              |
|     | 225/50R17 XL | 98         | T             | 7J           | 750                | 290                     | 658                   | 233                | 8.9              |
| 18  | 225/40R18 XL | 92         | T             | 8J           | 630                | 290                     | 637                   | 230                | 8.9              |
|     | 225/45R18 XL | 95         | T             | 7 1/2J       | 690                | 290                     | 659                   | 225                | 8.9              |
|     | 245/40R18 XL | 97         | T             | 8 1/2J       | 730                | 290                     | 653                   | 248                | 8.9              |
| 19  | 225/35R19 XL | 88         | T             | 8J           | 560                | 290                     | 641                   | 230                | 8.9              |
|     | 245/40R19 XL | 98         | T             | 8 1/2J       | 750                | 290                     | 679                   | 248                | 8.9              |

M+S Studdable Tires



## GREEN-Max Winter Ice I-15

OUTSTANDING HANDLING PERFORMANCE

- Direction tread pattern design providing excellent handling performance;
- Directional grooves to help evacuate snow and mud.

| RIM | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 14  | 175/65R14 XL | 86         | T             | 5J           | 530                | 290                     | 584                   | 177                | 8.7              |
|     | 185/60R15 XL | 88         | T             | 5 1/2J       | 560                | 290                     | 603                   | 189                | 8.7              |
| 15  | 185/65R15 XL | 92         | T             | 5 1/2J       | 630                | 290                     | 621                   | 189                | 8.7              |
|     | 195/65R15 XL | 95         | T             | 6J           | 690                | 290                     | 635                   | 201                | 8.7              |
|     | 195/55R16 XL | 91         | T             | 6J           | 615                | 290                     | 620                   | 201                | 8.7              |
| 16  | 205/55R16 XL | 94         | T             | 6 1/2J       | 670                | 290                     | 632                   | 214                | 8.7              |
|     | 205/60R16 XL | 96         | T             | 6J           | 710                | 290                     | 652                   | 209                | 8.7              |
|     | 215/55R16 XL | 97         | T             | 7J           | 730                | 290                     | 642                   | 226                | 8.7              |
|     | 215/60R16 XL | 99         | T             | 6 1/2J       | 775                | 290                     | 664                   | 221                | 8.7              |
|     | 215/65R16 XL | 102        | T             | 6 1/2J       | 850                | 290                     | 686                   | 221                | 8.7              |
|     | 225/55R16 XL | 99         | T             | 7J           | 775                | 290                     | 654                   | 233                | 8.7              |
| 17  | 205/50R17 XL | 93         | T             | 6 1/2J       | 650                | 290                     | 638                   | 223                | 8.7              |
|     | 225/45R17 XL | 94         | T             | 7 1/2J       | 670                | 290                     | 634                   | 225                | 8.7              |
|     | 225/50R17 XL | 98         | T             | 7J           | 750                | 290                     | 658                   | 233                | 8.7              |
|     | 225/55R17 XL | 101        | T             | 7J           | 825                | 290                     | 680                   | 233                | 8.7              |
|     | 235/45R17 XL | 97         | T             | 8J           | 730                | 290                     | 644                   | 236                | 8.7              |

M+S



## GREEN-Max Winter GRIP VAN2

NEW PRODUCT

STUDDABLE SNOW TIRE WITH OUTSTANDING BRAKING PERFORMANCE ON ICE&SNOW CONDITION

- Designed for ice and snow surface;
- Great grip and handling performance on ice and snow surface.

| RIM | Size       | Ply Rating | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|------------|------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 10  | 195/55R10C | /          | 98/96      | N             | 6.00B        | D 710 S 750        | 625                     | 468                   | 201                | 10.2             |
|     | 155R13C    | 8PR        | 90/88      | R             | 4.50B        | D 560S 600         | 450                     | 578                   | 157                | 10.2             |
| 13  | 155R13C    | /          | 91/89      | N             | 4.50B        | D 580S 615         | 450                     | 578                   | 157                | 10.2             |
|     | 165R13C    | /          | 96/94      | N             | 4.50B        | D 670S 710         | 450                     | 594                   | 165                | 10.2             |
|     | 175R13C    | 8PR        | 97/95      | Q             | 5.00B        | D 690 S 730        | 450                     | 610                   | 177                | 10.2             |
|     | 195/50R13C | /          | 104/101    | N             | 6.00B        | D 825S 900         | 650                     | 526                   | 201                | 10.2             |
| 14  | 185R14C    | 8PR        | 102/100    | R             | 5 1/2J       | D 800 S 850        | 450                     | 652                   | 189                | 10.2             |
|     | 185R14C    | /          | 102/100    | N             | 5 1/2J       | D 800 S 850        | 450                     | 652                   | 189                | 10.2             |
| 15  | 195/70R15C | 8PR        | 104/102    | R             | 6J           | D 850 S 900        | 450                     | 655                   | 201                | 10.2             |
|     | 215/70R15C | 8PR        | 109/107    | R             | 6 1/2J       | D 975 S 1030       | 450                     | 683                   | 221                | 10.2             |
|     | 225/70R15C | 8PR        | 112/110    | R             | 6 1/2J       | D 1060 S 1120      | 450                     | 697                   | 228                | 10.2             |
| 16  | 185/75R16C | 8PR        | 104/102    | R             | 5J           | D 850 S 900        | 475                     | 684                   | 184                | 10.2             |
|     | 195/75R16C | 8PR        | 107/105    | R             | 5 1/2J       | D 925 S 975        | 475                     | 698                   | 196                | 10.2             |
|     | 205/65R16C | 8PR        | 107/105    | R             | 6J           | D 925 S 975        | 475                     | 672                   | 209                | 10.2             |
|     | 215/65R16C | 8PR        | 109/107    | R             | 6 1/2J       | D 975S 1030        | 475                     | 686                   | 221                | 10.2             |
|     | 205/75R16C | 8PR        | 110/108    | R             | 5 1/2J       | D 1000 S 1060      | 475                     | 714                   | 203                | 10.2             |
|     | 215/75R16C | 10PR       | 116/114    | R             | 6J           | D 1180 S 1250      | 525                     | 728                   | 216                | 10.2             |
|     | 225/65R16C | 8PR        | 112/110    | R             | 6 1/2J       | D 1060 S 1120      | 475                     | 698                   | 228                | 10.2             |
|     | 225/75R16C | 10PR       | 121/120    | R             | 6J           | D 1400 S 1450      | 575                     | 744                   | 223                | 10.2             |
|     | 235/65R16C | 10PR       | 121/119    | R             | 7J           | D 1360S 1450       | 575                     | 712                   | 240                | 10.2             |
| 17  | 215/60R17C | 8PR        | 109/107    | R             | 6 1/2J       | D 975S 1030        | 475                     | 690                   | 221                | 10.2             |
|     | 235/60R17C | 10PR       | 117/115    | Q             | 7J           | D 1215S 1285       | 525                     | 714                   | 240                | 10.2             |

M+S Studdable Tires





## GREEN-Max Winter Ice I-15 SUV

### OUTSTANDING HANDLING PERFORMANCE

- Directional grooves design for evacuate snow and mud;
- Complex soft tread compound and 3D sipes technology to promote handling performance on ice and snow condition.

| RIM          | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |     |
|--------------|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|-----|
| 15           | 205/70R15    | 96         | T             | 6J           | 710                | 250                     | 669                   | 209                | 9.7              |     |
|              | 215/75R15    | 100        | T             | 6J           | 800                | 250                     | 703                   | 216                | 9.7              |     |
|              | 235/75R15    | 105        | T             | 6 1/2J       | 925                | 250                     | 733                   | 235                | 9.7              |     |
| 16           | 215/65R16    | 98         | T             | 6 1/2J       | 750                | 250                     | 686                   | 221                | 9.7              |     |
|              | 225/60R16    | 98         | T             | 6 1/2J       | 750                | 250                     | 676                   | 228                | 9.7              |     |
|              | 235/70R16    | 106        | T             | 7J           | 950                | 250                     | 736                   | 240                | 9.7              |     |
|              | 245/70R16    | 107        | H             | 7J           | 975                | 250                     | 750                   | 248                | 9.7              |     |
|              | 275/70R16    | 114        | T             | 8J           | 1180               | 250                     | 792                   | 279                | 9.7              |     |
|              | 215/60R17    | 96         | T             | 6 1/2J       | 710                | 250                     | 690                   | 221                | 9.7              |     |
| 17           | 225/60R17    | 99         | T             | 6 1/2J       | 775                | 250                     | 702                   | 228                | 9.7              |     |
|              | 225/65R17    | 102        | T             | 6 1/2J       | 850                | 250                     | 724                   | 228                | 9.7              |     |
|              | 225/65R17 XL | 106        | T             | 6 1/2J       | 950                | 290                     | 724                   | 228                | 9.7              |     |
|              | 235/55R17    | 99         | T             | 7 1/2J       | 775                | 250                     | 690                   | 245                | 9.7              |     |
|              | 235/65R17 XL | 108        | T             | 7J           | 1000               | 290                     | 738                   | 240                | 10               |     |
|              | 235/50R17    | 96         | T             | 7 1/2J       | 710                | 250                     | 668                   | 245                | 9.7              |     |
|              | 245/45R17    | 95         | T             | 8J           | 690                | 250                     | 652                   | 243                | 9.7              |     |
|              | 245/65R17    | 107        | T             | 7J           | 975                | 250                     | 750                   | 248                | 9.7              |     |
|              | 255/45R17    | 98         | T             | 8 1/2J       | 750                | 250                     | 662                   | 255                | 9.7              |     |
|              | 255/60R17    | 106        | T             | 7 1/2J       | 950                | 250                     | 738                   | 260                | 9.7              |     |
|              | 265/65R17    | 112        | T             | 8J           | 1120               | 250                     | 776                   | 272                | 9.7              |     |
|              | 275/65R17    | 115        | T             | 8J           | 1215               | 250                     | 790                   | 279                | 9.7              |     |
|              | 18           | 225/50R18  | 95            | T            | 7J                 | 690                     | 250                   | 683                | 233              | 9.7 |
|              |              | 225/55R18  | 98            | T            | 7J                 | 750                     | 250                   | 705                | 233              | 9.7 |
| 225/60R18    |              | 100        | T             | 6 1/2J       | 800                | 250                     | 727                   | 228                | 9.7              |     |
| 235/50R18    |              | 97         | T             | 7 1/2J       | 730                | 250                     | 693                   | 245                | 9.7              |     |
| 235/55R18    |              | 100        | T             | 7 1/2J       | 800                | 250                     | 715                   | 245                | 9.7              |     |
| 235/60R18    |              | 103        | T             | 7J           | 875                | 250                     | 739                   | 240                | 9.7              |     |
| 235/60R18 XL |              | 107        | T             | 7J           | 975                | 290                     | 739                   | 240                | 9.7              |     |
| 235/65R18    |              | 106        | T             | 7J           | 950                | 250                     | 763                   | 240                | 9.7              |     |
| 245/40R18    |              | 93         | T             | 8 1/2J       | 650                | 250                     | 653                   | 248                | 9.7              |     |
| 245/45R18    |              | 96         | T             | 8J           | 710                | 250                     | 677                   | 243                | 9.7              |     |
| 245/50R18    |              | 100        | T             | 7 1/2J       | 800                | 250                     | 703                   | 253                | 9.7              |     |
| 245/60R18    |              | 105        | T             | 7J           | 925                | 250                     | 751                   | 248                | 9.7              |     |
| 255/40R18    |              | 95         | T             | 9J           | 690                | 250                     | 661                   | 260                | 9.7              |     |
| 255/45R18    |              | 99         | T             | 8 1/2J       | 775                | 250                     | 687                   | 255                | 9.7              |     |
| 255/55R18    |              | 105        | T             | 8J           | 925                | 250                     | 737                   | 265                | 9.7              |     |
| 255/60R18 XL |              | 112        | H             | 7 1/2J       | 1120               | 290                     | 763                   | 260                | 9.7              |     |
| 265/60R18    | 110          | T          | 8J            | 1060         | 250                | 775                     | 272                   | 9.7                |                  |     |
| 285/60R18    | 116          | T          | 8 1/2J        | 1250         | 250                | 799                     | 292                   | 9.7                |                  |     |
| 19           | 225/55R19    | 99         | T             | 7J           | 775                | 250                     | 731                   | 233                | 9.7              |     |
|              | 235/50R19    | 99         | T             | 7 1/2J       | 775                | 250                     | 719                   | 245                | 9.7              |     |
|              | 235/55R19 XL | 105        | H             | 7 1/2J       | 925                | 290                     | 741                   | 245                | 9.7              |     |
|              | 245/40R19 XL | 98         | S             | 8 1/2J       | 750                | 290                     | 679                   | 248                | 9.2              |     |
|              | 245/45R19    | 98         | T             | 8J           | 750                | 250                     | 703                   | 243                | 9.7              |     |
|              | 245/55R19    | 103        | T             | 7 1/2J       | 875                | 250                     | 753                   | 253                | 9.7              |     |
|              | 255/40R19    | 96         | T             | 9J           | 710                | 250                     | 687                   | 260                | 9.7              |     |
|              | 255/45R19    | 100        | T             | 8 1/2J       | 800                | 250                     | 713                   | 255                | 9.7              |     |
|              | 255/50R19    | 103        | T             | 8J           | 875                | 250                     | 739                   | 265                | 9.7              |     |
|              | 255/55R19    | 107        | T             | 8J           | 975                | 250                     | 763                   | 265                | 9.7              |     |
|              | 265/50R19    | 106        | T             | 8 1/2J       | 950                | 250                     | 749                   | 277                | 9.7              |     |
|              | 275/35R19    | 96         | T             | 9 1/2J       | 710                | 250                     | 675                   | 278                | 9.7              |     |
|              | 275/40R19    | 101        | T             | 9 1/2J       | 825                | 250                     | 703                   | 278                | 9.7              |     |
|              | 275/55R19    | 111        | T             | 8 1/2J       | 1090               | 250                     | 785                   | 284                | 9.7              |     |
| 285/45R19    | 107          | T          | 9 1/2J        | 975          | 250                | 739                     | 285                   | 9.2                |                  |     |

| RIM       | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----------|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 20        | 245/40R20    | 95         | T             | 8 1/2J       | 690                | 250                     | 704                   | 248                | 9.7              |
|           | 245/45R20    | 99         | T             | 8J           | 775                | 250                     | 728                   | 243                | 9.7              |
|           | 245/50R20    | 102        | T             | 7 1/2J       | 850                | 250                     | 754                   | 253                | 9.7              |
|           | 255/45R20    | 101        | T             | 8 1/2J       | 825                | 250                     | 738                   | 255                | 9.7              |
|           | 255/50R20 XL | 109        | H             | 8J           | 1030               | 290                     | 764                   | 265                | 9.7              |
|           | 255/55R20 XL | 110        | T             | 8J           | 1060               | 290                     | 788                   | 265                | 9.7              |
|           | 265/45R20    | 104        | T             | 9J           | 900                | 250                     | 746                   | 266                | 9.7              |
|           | 265/50R20    | 107        | T             | 8 1/2J       | 975                | 250                     | 774                   | 277                | 9.7              |
|           | 275/40R20    | 102        | T             | 9 1/2J       | 850                | 250                     | 728                   | 278                | 9.7              |
|           | 275/45R20 XL | 110        | T             | 9J           | 1060               | 290                     | 756                   | 273                | 9.7              |
|           | 275/55R20    | 113        | T             | 8 1/2J       | 1150               | 250                     | 810                   | 284                | 9.7              |
|           | 285/35R20    | 100        | T             | 10J          | 800                | 250                     | 708                   | 290                | 9.7              |
|           | 285/45R20    | 108        | T             | 9 1/2J       | 1000               | 250                     | 764                   | 285                | 9.7              |
|           | 285/50R20    | 112        | T             | 9J           | 1120               | 250                     | 794                   | 297                | 9.7              |
| 315/35R20 | 106          | T          | 11J           | 950          | 250                | 728                     | 320                   | 9.7                |                  |
| 21        | 265/45R21    | 104        | T             | 9J           | 900                | 250                     | 771                   | 266                | 9.7              |
|           | 275/45R21    | 107        | T             | 9J           | 975                | 250                     | 781                   | 273                | 9.7              |
|           | 275/50R21 XL | 113        | T             | 8 1/2J       | 1150               | 290                     | 809                   | 284                | 9.7              |
|           | 285/45R21    | 109        | T             | 9 1/2J       | 1030               | 250                     | 789                   | 285                | 9.7              |
|           | 295/40R21    | 107        | T             | 10 1/2J      | 975                | 250                     | 769                   | 301                | 9.7              |

M+S



## GREEN-Max Winter Ice I-16

### EXCELLENT SNOW HANDLING AND ICE BRAKING&ACCELERATION

- Outstanding grip and traction performance on ice and snow surface;
- Better braking and acceleration property.

| RIM | Size         | Load Index | Speed Symbols | Standard Rim | Standard Load (kg) | Inflated Pressure (kpa) | Overall Diameter (mm) | Overall Width (mm) | Tread Depth (mm) |
|-----|--------------|------------|---------------|--------------|--------------------|-------------------------|-----------------------|--------------------|------------------|
| 12  | 145/70R12    | 69         | T             | 4.50B        | 325                | 250                     | 509                   | 150                | 8.3              |
| 13  | 165/70R13    | 79         | T             | 5.00B        | 437                | 250                     | 562                   | 170                | 8.3              |
|     | 175/70R13    | 82         | T             | 5.00B        | 475                | 250                     | 576                   | 177                | 8.7              |
| 14  | 165/60R14    | 75         | T             | 5J           | 387                | 250                     | 554                   | 170                | 8.3              |
|     | 165/70R14    | 81         | T             | 5J           | 462                | 250                     | 588                   | 170                | 8.3              |
|     | 175/70R14    | 84         | T             | 5J           | 500                | 250                     | 602                   | 177                | 8.3              |
|     | 185/60R14    | 82         | T             | 5 1/2J       | 475                | 250                     | 578                   | 189                | 8.7              |
|     | 185/65R14    | 86         | T             | 5 1/2J       | 530                | 250                     | 596                   | 189                | 8.7              |
|     | 185/70R14    | 88         | T             | 5 1/2J       | 560                | 250                     | 616                   | 189                | 8.7              |
|     | 195/60R14    | 86         | T             | 6J           | 530                | 250                     | 590                   | 201                | 8.7              |
| 15  | 215/75R14    | 100        | T             | 6J           | 800                | 250                     | 678                   | 216                | 8.7              |
|     | 175/65R15    | 84         | T             | 5J           | 500                | 250                     | 609                   | 177                | 8.7              |
|     | 185/55R15    | 82         | T             | 6J           | 475                | 250                     | 585                   | 194                | 8.7              |
|     | 185/60R15    | 84         | T             | 5 1/2J       | 500                | 250                     | 603                   | 189                | 8.7              |
|     | 185/65R15    | 88         | T             | 5 1/2J       | 560                | 250                     | 621                   | 189                | 8.7              |
|     | 195/55R15    | 85         | T             | 6J           | 515                | 250                     | 595                   | 201                | 8.7              |
|     | 195/60R15    | 88         | T             | 6J           | 560                | 250                     | 615                   | 201                | 8.7              |
|     | 195/65R15    | 91         | T             | 6J           | 615                | 250                     | 635                   | 201                | 8.7              |
|     | 205/65R15    | 94         | T             | 6J           | 670                | 250                     | 647                   | 209                | 8.7              |
|     | 195/60R16    | 89         | S             | 6J           | 580                | 250                     | 640                   | 201                | 8.7              |
| 16  | 205/55R16 XL | 94         | T             | 6 1/2J       | 670                | 290                     | 632                   | 214                | 8.7              |
|     | 205/60R16    | 92         | T             | 6J           | 630                | 250                     | 652                   | 209                | 8.7              |
| 17  | 215/50R17    | 91         | T             | 7J           | 615                | 250                     | 648                   | 226                | 8.7              |
|     | 215/55R17    | 94         | T             | 7J           | 670                | 250                     | 668                   | 226                | 8.7              |
| 18  | 225/45R18    | 91         | T             | 7 1/2J       | 615                | 250                     | 659                   | 225                | 8.7              |
|     | 235/45R18    | 94         | T             | 8J           | 670                | 250                     | 669                   | 236                | 8.7              |
| 19  | 225/45R19    | 92         | T             | 7 1/2J       | 630                | 250                     | 685                   | 225                | 8.7              |

M+S

# LONG HAUL



## ETS200

RADIAL TRUCK TIRE  
(FOR INTERNATIONAL LONG-DISTANCE TRANSPORTATION)

- Suitable for steer axle of trucks running with high speed on highway.
- Low rolling resistance, reducing fuel consumption.
- Lasting grip and stability by hidden groove design.
- New pattern design improves mileage for long-distance transportation.

| Size        | Ply Rating | Load Index       | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |                  |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |                  |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 315/80R22.5 | 22         | 158/150(154/150) | L(M)          | 9.00         | 3350                           | 900 | 4250   | 900 | 1076                  | 312                | 12.5             | ETRTO          |
| 315/80R22.5 | 20         | 156/150(154/150) | L(M)          | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 12.5             | ETRTO          |
| 315/80R22.5 | 20         | 157/154          | L             | 9.00         | 3750                           | 900 | 4125   | 900 | 1076                  | 312                | 12.5             | GB             |
| 315/80R22.5 | 18         | 154/151          | M             | 9.00         | 3450                           | 830 | 3750   | 830 | 1076                  | 312                | 12.5             | GB             |
| 295/80R22.5 | 18         | 154/149          | M             | 9.00         | 3250                           | 850 | 3750   | 850 | 1044                  | 298                | 12.5             | ETRTO          |
| 295/80R22.5 | 18         | 152/149          | M             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 12.5             | GB             |
| 295/80R22.5 | 16         | 152/148          | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 12.5             | ETRTO          |
| 295/80R22.5 | 16         | 150/147          | M             | 9.00         | 3075                           | 830 | 3350   | 830 | 1044                  | 298                | 12.5             | GB             |
| 275/80R22.5 | 18         | 149/146          | M             | 8.25         | 3000                           | 850 | 3250   | 850 | 1012                  | 276                | 12.5             | ETRTO          |
| 275/80R22.5 | 18         | 149/146          | M             | 8.25         | 3000                           | 900 | 3250   | 900 | 1012                  | 276                | 12.5             | GB             |
| 275/80R22.5 | 16         | 147/144          | M             | 8.25         | 2800                           | 830 | 3075   | 830 | 1012                  | 276                | 12.5             | GB             |
| 275/80R22.5 | 16         | 145/143          | M             | 8.25         | 2725                           | 750 | 2900   | 750 | 1012                  | 276                | 12.5             | ETRTO          |
| 275/80R22.5 | 16         | 146/143          | M             | 8.25         | 2725                           | 830 | 3000   | 830 | 1012                  | 276                | 12.5             | TRA            |
| 275/70R22.5 | 18         | 150/148          | M             | 8.25         | 3150                           | 900 | 3350   | 900 | 958                   | 276                | 12.5             | ETRTO          |
| 275/70R22.5 | 18         | 146/143          | M             | 8.25         | 2725                           | 900 | 3000   | 900 | 958                   | 276                | 12.5             | GB             |
| 275/70R22.5 | 16         | 148/145          | M             | 8.25         | 2900                           | 900 | 3150   | 900 | 958                   | 276                | 12.5             | ETRTO          |
| 275/70R22.5 | 16         | 144/141          | M             | 8.25         | 2575                           | 830 | 2800   | 830 | 958                   | 276                | 12.5             | GB             |
| 255/70R22.5 | 16         | 140/137          | M             | 7.50         | 2300                           | 800 | 2500   | 800 | 930                   | 255                | 12.5             | ETRTO          |
| 255/70R22.5 | 16         | 140/137          | M             | 7.50         | 2300                           | 830 | 2500   | 830 | 930                   | 255                | 12.5             | GB/TRA         |
| 255/70R22.5 | 14         | 136/133          | M             | 7.50         | 2060                           | 700 | 2240   | 700 | 930                   | 255                | 12.5             | ETRTO          |
| 255/70R22.5 | 14         | 138/134          | M             | 7.50         | 2120                           | 760 | 2360   | 760 | 930                   | 255                | 12.5             | GB/TRA         |
| 315/60R22.5 | 18         | 154/150(152/148) | L(M)          | 9.75         | 3350                           | 900 | 3750   | 900 | 950                   | 313                | 12.0             | ETRTO          |
| 315/60R22.5 | 16         | 152/148          | L             | 9.75         | 3150                           | 900 | 3550   | 900 | 950                   | 313                | 12.0             | ETRTO          |
| 315/60R22.5 | 20         | 153/150          | K             | 9.75         | 3350                           | 900 | 3650   | 900 | 950                   | 313                | 12.0             | GB             |
| 315/60R22.5 | 18         | 151/148          | K             | 9.75         | 3150                           | 830 | 3450   | 830 | 950                   | 313                | 12.0             | GB             |
| 295/60R22.5 | 16         | 150/147          | L             | 9.00         | 3075                           | 900 | 3350   | 900 | 926                   | 292                | 15.5             | ETRTO          |
| 295/60R22.5 | 16         | 148/145          | L             | 9.00         | 2900                           | 830 | 3150   | 830 | 926                   | 292                | 15.5             | GB             |



# LLD76

RADIAL TRUCK TIRE

- Suitable for the drive axle of the trucks running on highway.
- Good braking and grip on wet road.
- Construction optimized for long service life.

| Size    | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|---------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|         |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|         |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5 | 14         | 144/142    | M             | 8.25         | 2650                           | 720 | 2800   | 720 | 1065                  | 279                | 22.0             | TRA            |
| 11R22.5 | 16         | 146/143    | M             | 8.25         | 2725                           | 830 | 3000   | 830 | 1065                  | 279                | 22.0             | TRA            |
| 11R24.5 | 14         | 146/143    | M             | 8.25         | 2725                           | 720 | 3000   | 720 | 1116                  | 279                | 22.0             | TRA            |
| 11R24.5 | 16         | 149/146    | M             | 8.25         | 3000                           | 830 | 3250   | 830 | 1116                  | 279                | 22.0             | TRA            |



# ETD100

RADIAL TRUCK TIRE (FOR INTERNATIONAL LONG-DISTANCE TRANSPORTATION)

- Suitable for drive axle of trucks running with high speed on highway.
- Low rolling resistance reduces fuel consumption.
- Lasting grip and stability by hidden groove design, with M+S and 3PMSF marking.
- New pattern design improves mileage for long distance transportation.

| Size        | Ply Rating | Load Index       | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |                  |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |                  |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 315/80R22.5 | 18         | 154/150          | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 17.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150(154/150) | L(M)          | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 17.0             | ETRTO          |
| 295/80R22.5 | 16         | 152/148          | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 16.0             | ETRTO          |
| 315/70R22.5 | 16         | 154/150(152/148) | L(M)          | 9.00         | 3350                           | 900 | 3750   | 900 | 1014                  | 312                | 16.5             | ETRTO          |
| 315/70R22.5 | 18         | 156/150(154/150) | L(M)          | 9.00         | 3350                           | 900 | 4000   | 900 | 1014                  | 312                | 16.5             | ETRTO          |
| 315/60R22.5 | 16         | 152/148          | L             | 9.75         | 3150                           | 900 | 3550   | 900 | 950                   | 313                | 16.5             | ETRTO          |
| 295/60R22.5 | 16         | 150/147          | L             | 9.00         | 3075                           | 900 | 3350   | 900 | 926                   | 292                | 16.0             | ETRTO          |



# ETS100

RADIAL TRUCK TIRE (FOR INTERNATIONAL LONG-DISTANCE TRANSPORTATION)

- Suitable for steer axle of trucks running with high speed on highway.
- Low rolling resistance, reducing fuel consumption.
- Lasting grip and stability by hidden groove design.
- New pattern design improves mileage for long-distance transportation.

| Size        | Ply Rating | Load Index       | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |                  |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |                  |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 315/80R22.5 | 18         | 154/150          | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 15.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150(154/150) | L(M)          | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 15.0             | ETRTO          |
| 315/80R22.5 | 22         | 158/150(154/150) | L(M)          | 9.00         | 3350                           | 900 | 4250   | 900 | 1076                  | 312                | 15.0             | ETRTO          |
| 295/80R22.5 | 18         | 154/149          | M             | 9.00         | 3250                           | 850 | 3750   | 850 | 1044                  | 298                | 14.0             | ETRTO          |
| 295/80R22.5 | 16         | 152/148          | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 14.0             | ETRTO          |
| 315/70R22.5 | 16         | 154/150(152/148) | L(M)          | 9.00         | 3350                           | 900 | 3750   | 900 | 1014                  | 312                | 15.0             | ETRTO          |
| 315/70R22.5 | 18         | 156/150(154/150) | L(M)          | 9.00         | 3350                           | 900 | 4000   | 900 | 1014                  | 312                | 15.0             | ETRTO          |
| 315/60R22.5 | 16         | 152/148          | L             | 9.75         | 3150                           | 900 | 3550   | 900 | 950                   | 313                | 14.5             | ETRTO          |
| 315/60R22.5 | 18         | 154/150(152/148) | L(M)          | 9.75         | 3350                           | 900 | 3750   | 900 | 950                   | 313                | 14.5             | ETRTO          |
| 295/60R22.5 | 16         | 150/147          | L             | 9.00         | 3075                           | 900 | 3350   | 900 | 926                   | 292                | 13.0             | ETRTO          |



# LFE891

RADIAL TRUCK TIRE (LONG HAUL STEER)

- Maximize tread volume for long original life and lower tread wear cost per mile.
- Equalizer ribs Absorb irregular wear, promoting uniform rib wear and higher removal mileage.
- Micro sipes Protect against irregular wear.
- Strong carcass materials.
- Help promote tire durability and provide tire retreadability.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 295/75R22.5 | 14         | 144/141    | L             | 9.00         | 2575                           | 760 | 2800   | 760 | 1014                  | 298                | 16.5             | TRA            |
| 295/75R22.5 | 16         | 146/143    | L             | 9.00         | 2725                           | 830 | 3000   | 830 | 1014                  | 298                | 16.5             | TRA            |



# LDE892

## RADIAL TRUCK TIRE

- Suitable for the drive axle of the trucks running on highway.
- Good braking and grip on wet road.
- Long life, Low rolling resistance.
- Optimizes the footprint for even wear and long tread life.
- Strong carcass materials.
- Help promote tire durability and provide tire retreadability.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 14         | 144/142    | L             | 8.25         | 2650                           | 720 | 2800   | 720 | 1065                  | 279                | 22.0             | TRA            |
| 11R22.5     | 16         | 146/143    | L             | 8.25         | 2725                           | 830 | 3000   | 830 | 1065                  | 279                | 22.0             | TRA            |
| 11R24.5     | 14         | 146/143    | L             | 8.25         | 2725                           | 720 | 3000   | 720 | 1116                  | 279                | 22.0             | TRA            |
| 11R24.5     | 16         | 149/146    | L             | 8.25         | 3000                           | 830 | 3250   | 830 | 1116                  | 279                | 22.0             | TRA            |
| 295/75R22.5 | 14         | 144/141    | L             | 9.00         | 2575                           | 760 | 2800   | 760 | 1026                  | 298                | 22.0             | TRA            |
| 295/75R22.5 | 16         | 146/143    | L             | 9.00         | 2725                           | 830 | 3000   | 830 | 1026                  | 298                | 22.0             | TRA            |
| 285/75R24.5 | 14         | 144/141    | L             | 8.25         | 2575                           | 760 | 2800   | 760 | 1062                  | 283                | 22.0             | TRA            |
| 285/75R24.5 | 16         | 147/144    | L             | 8.25         | 2800                           | 830 | 3075   | 830 | 1062                  | 283                | 22.0             | TRA            |



# ETT100

## RADIAL TRUCK TIRE (FOR INTERNATIONAL LONG-DISTANCE TRANSPORTATION)

- Suitable for trailer axle of trucks running with high speed on highway.
- Low rolling resistance reduces fuel consumption.
- Lasting grip and stability by hidden groove design.
- New pattern design improves mileage for long-distance transportation.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |    |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |    | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kg | kPa    | kPa |                       |                    |                  |                |
| 385/55R19.5 | 18         | 156        | J             | 12.25        | --                             | -- | 4000   | 900 | 919                   | 386                | 12.5             | ETRTO          |
| 385/55R22.5 | 18         | 158        | L             | 12.25        | --                             | -- | 4250   | 850 | 996                   | 386                | 12.0             | ETRTO          |
| 385/55R22.5 | 20         | 160(158)   | K(L)          | 12.25        | --                             | -- | 4500   | 900 | 996                   | 386                | 12.0             | ETRTO          |
| 385/65R22.5 | 20         | 160(158)   | K(L)          | 11.75        | --                             | -- | 4500   | 900 | 1072                  | 389                | 13.5             | ETRTO          |
| 385/65R22.5 | 24         | 164(158)   | K(L)          | 11.75        | --                             | -- | 5000   | 900 | 1072                  | 389                | 13.5             | ETRTO          |
| 425/65R22.5 | 18         | 162        | K             | 12.25        | --                             | -- | 4750   | 760 | 1124                  | 422                | 14.5             | TRA            |
| 425/65R22.5 | 20         | 164        | K             | 12.25        | --                             | -- | 5000   | 830 | 1124                  | 422                | 14.5             | GB             |
| 425/65R22.5 | 20         | 165        | K             | 12.25        | --                             | -- | 5150   | 830 | 1124                  | 422                | 14.5             | TRA            |
| 425/65R22.5 | 20         | 165        | K             | 12.25        | --                             | -- | 5150   | 825 | 1124                  | 422                | 14.5             | ETRTO          |
| 435/50R19.5 | 18         | 156        | J             | 14.00        | --                             | -- | 4000   | 850 | 931                   | 438                | 12.5             | ETRTO          |
| 435/50R19.5 | 20         | 160        | J             | 14.00        | --                             | -- | 4500   | 900 | 931                   | 438                | 12.5             | ETRTO          |
| 445/45R19.5 | 18         | 156        | J             | 15.00        | --                             | -- | 4000   | 900 | 895                   | 446                | 12.5             | ETRTO          |
| 445/45R19.5 | 20         | 160        | J             | 15.00        | --                             | -- | 4500   | 900 | 895                   | 446                | 12.5             | ETRTO          |



# KTD10

## RADIAL TRUCK TIRE

- Suitable for the drive axle of the trucks running on highway.
- Low rolling resistance reduces fuel consumption.
- Closed shoulder to fight irregular wear.
- New pattern design improves mileage for long-distance transportation.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 14         | 144/142    | L             | 8.25         | 2650                           | 720 | 2800   | 720 | 1065                  | 279                | 23.8             | TRA            |
| 11R22.5     | 16         | 146/143    | L             | 8.25         | 2725                           | 830 | 3000   | 830 | 1065                  | 279                | 23.8             | TRA            |
| 11R24.5     | 14         | 146/143    | L             | 8.25         | 2725                           | 720 | 3000   | 720 | 1116                  | 279                | 23.8             | TRA            |
| 11R24.5     | 16         | 149/146    | L             | 8.25         | 3000                           | 830 | 3250   | 830 | 1116                  | 279                | 23.8             | TRA            |
| 295/75R22.5 | 14         | 144/141    | L             | 9.00         | 2575                           | 760 | 2800   | 760 | 1026                  | 298                | 22.2             | TRA            |
| 295/75R22.5 | 16         | 146/143    | L             | 9.00         | 2725                           | 830 | 3000   | 830 | 1026                  | 298                | 22.2             | TRA            |
| 285/75R24.5 | 14         | 144/141    | L             | 8.25         | 2575                           | 760 | 2800   | 760 | 1062                  | 283                | 22.2             | TRA            |
| 285/75R24.5 | 16         | 147/144    | L             | 8.25         | 2800                           | 830 | 3075   | 830 | 1062                  | 283                | 22.2             | TRA            |



# LDL817

## RADIAL TRUCK TIRE (LONG HAUL DRIVE)

- Typical block pattern design makes good towing and grip on wet and dry road.
- Low fuel consumption.
- Wear-resistance compound reduces shifting to prevent uneven wear.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 445/50R22.5 | 18         | 158        | L             | 14.00        | ---                            | --- | 4250   | 760 | 1018                  | 445                | 20.0             | TRA            |
| 445/50R22.5 | 20         | 161        | L             | 14.00        | ---                            | --- | 4625   | 830 | 1018                  | 445                | 20.0             | TRA            |
| 445/50R22.5 | 18         | 155        | L             | 14.00        | ---                            | --- | 3875   | 700 | 1018                  | 445                | 20.0             | ETRTO          |
| 445/50R22.5 | 20         | 161        | L             | 14.00        | ---                            | --- | 4625   | 850 | 1018                  | 445                | 20.0             | ETRTO          |



# LTL811

RADIAL TRUCK TIRE

- Suitable for the trailer axle of trucks running on highway.
- Low fuel consumption.
  - Wear-resistance compound reduces shifting to prevent uneven wear.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 445/50R22.5 | 18         | 158        | L             | 14.00        | ---                            | --- | 4250   | 760 | 1018                  | 445                | 10.5             | TRA            |
| 445/50R22.5 | 20         | 161        | L             | 14.00        | ---                            | --- | 4625   | 830 | 1018                  | 445                | 10.5             | TRA            |
| 445/50R22.5 | 18         | 155        | L             | 14.00        | ---                            | --- | 3875   | 700 | 1018                  | 445                | 10.5             | ETRTO          |
| 445/50R22.5 | 20         | 161        | L             | 14.00        | ---                            | --- | 4625   | 850 | 1018                  | 445                | 10.5             | ETRTO          |



# LDE803

RADIAL TRUCK TIRE

- Suitable for the drive axle of the trucks running on highway.
- Low fuel consumption.
  - Good braking and grip on wet road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 295/80R22.5 | 16         | 152/148    | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 20.0             | ETRTO          |
| 315/80R22.5 | 18         | 154/150    | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 18.5             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | L             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 18.5             | ETRTO          |



# LFE805

RADIAL TRUCK TIRE (LONG HAUL STEER)

- S-shaped groove bottom reduces stone retention.
- Good handling and high-speed performance.
- Low fuel consumption.

| Size        | Ply Rating | Load Index       | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |                  |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |                  |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 295/80R22.5 | 16         | 152/148          | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 15.0             | ETRTO          |
| 295/80R22.5 | 18         | 152/149          | M             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 15.0             | GB             |
| 295/80R22.5 | 18         | 154/149          | M             | 9.00         | 3250                           | 850 | 3750   | 850 | 1044                  | 298                | 15.0             | ETRTO          |
| 315/80R22.5 | 18         | 154/150          | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 15.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150          | L             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 15.0             | ETRTO          |
| 315/80R22.5 | 22         | 158/150(154/150) | L(M)          | 9.00         | 3350                           | 900 | 4250   | 900 | 1076                  | 312                | 15.0             | ETRTO          |



# LLF16

RADIAL TRUCK TIRE

- Suitable for the steer axle of the trucks running on highway.
- Good braking and grip on wet road.
  - Long life.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 14         | 144/142    | M             | 8.25         | 2650                           | 720 | 2800   | 720 | 1054                  | 279                | 14.5             | TRA            |
| 11R22.5     | 16         | 146/143    | M             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 14.5             | TRA            |
| 11R24.5     | 14         | 146/143    | M             | 8.25         | 2725                           | 720 | 3000   | 720 | 1104                  | 279                | 14.5             | TRA            |
| 11R24.5     | 16         | 149/146    | M             | 8.25         | 3000                           | 830 | 3250   | 830 | 1104                  | 279                | 14.5             | TRA            |
| 295/75R22.5 | 14         | 144/141    | M             | 9.00         | 2575                           | 760 | 2800   | 760 | 1014                  | 298                | 14.5             | TRA            |
| 295/75R22.5 | 16         | 146/143    | M             | 9.00         | 2725                           | 830 | 3000   | 830 | 1014                  | 298                | 14.5             | TRA            |
| 285/75R24.5 | 14         | 144/141    | M             | 8.25         | 2575                           | 760 | 2800   | 760 | 1050                  | 283                | 14.5             | TRA            |
| 285/75R24.5 | 16         | 147/144    | M             | 8.25         | 2800                           | 830 | 3075   | 830 | 1050                  | 283                | 14.5             | TRA            |



# LLD37

RADIAL TRUCK TIRE

- Suitable for the drive axle of the trucks running on highway.
- Good braking and grip on wet road.
- Long life.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 14         | 144/142    | M             | 8.25         | 2650                           | 720 | 2800   | 720 | 1065                  | 279                | 22.0             | TRA            |
| 11R22.5     | 16         | 146/143    | M             | 8.25         | 2725                           | 830 | 3000   | 830 | 1065                  | 279                | 22.0             | TRA            |
| 11R24.5     | 14         | 146/143    | M             | 8.25         | 2725                           | 720 | 3000   | 720 | 1116                  | 279                | 22.0             | TRA            |
| 11R24.5     | 16         | 149/146    | M             | 8.25         | 3000                           | 830 | 3250   | 830 | 1116                  | 279                | 22.0             | TRA            |
| 295/75R22.5 | 14         | 144/141    | M             | 9.00         | 2575                           | 760 | 2800   | 760 | 1026                  | 298                | 22.0             | TRA            |
| 295/75R22.5 | 16         | 146/143    | M             | 9.00         | 2725                           | 830 | 3000   | 830 | 1026                  | 298                | 22.0             | TRA            |
| 285/75R24.5 | 14         | 144/141    | M             | 8.25         | 2575                           | 760 | 2800   | 760 | 1062                  | 283                | 22.0             | TRA            |
| 285/75R24.5 | 16         | 147/144    | M             | 8.25         | 2800                           | 830 | 3075   | 830 | 1062                  | 283                | 22.0             | TRA            |



# LLF02

RADIAL TRUCK TIRE

- Suitable for the steer axle of the trucks running on highway.
- Stable and safe when running on wet and slippery road.
- Low fuel consumption.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 12R22.5     | 16         | 152/148    | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 14.5             | ETRTO          |
| 295/80R22.5 | 16         | 152/148    | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 14.5             | ETRTO          |
| 295/80R22.5 | 18         | 152/149    | M             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 14.5             | GB             |
| 315/80R22.5 | 18         | 154/150    | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 14.5             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | L             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 14.5             | ETRTO          |



# LTE821

RADIAL TRUCK TIRE (LONG HAUL TRAILER)

- Excellent straight running performance.
- Sipes in shoulder offer low noise and good heat dissipation.
- Low fuel consumption.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 14         | 144/142    | M             | 8.25         | 2650                           | 720 | 2800   | 720 | 1054                  | 279                | 9.5              | TRA            |
| 11R22.5     | 16         | 146/143    | M             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 9.5              | TRA            |
| 11R24.5     | 14         | 146/143    | M             | 8.25         | 2725                           | 720 | 3000   | 720 | 1104                  | 279                | 9.5              | TRA            |
| 11R24.5     | 16         | 149/146    | M             | 8.25         | 3000                           | 830 | 3250   | 830 | 1104                  | 279                | 9.5              | TRA            |
| 295/75R22.5 | 14         | 144/141    | M             | 9.00         | 2575                           | 760 | 2800   | 760 | 1014                  | 298                | 10.0             | TRA            |
| 295/75R22.5 | 16         | 146/143    | M             | 9.00         | 2725                           | 830 | 3000   | 830 | 1014                  | 298                | 10.0             | TRA            |
| 285/75R24.5 | 14         | 144/141    | M             | 8.25         | 2575                           | 760 | 2800   | 760 | 1050                  | 283                | 9.5              | TRA            |
| 285/75R24.5 | 16         | 147/144    | M             | 8.25         | 2800                           | 830 | 3075   | 830 | 1050                  | 283                | 9.5              | TRA            |



# LLD01

RADIAL TRUCK TIRE

- Suitable for the drive axle of the trucks running on highway.
- Good grip and high-speed performance.
- Low fuel consumption.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 12R22.5     | 16         | 152/148    | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 20.0             | ETRTO          |
| 315/80R22.5 | 18         | 154/150    | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 19.5             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | L             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 19.5             | ETRTO          |



# T820

## RADIAL TRUCK TIRE

- Suitable for the trailer axle of the trucks running on highway.
- Low fuel consumption.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 385/55R19.5 | 18         | 156        | J             | 12.25        | ---                            | --- | 4000   | 900 | 919                   | 386                | 12.5             | ETRTO          |
| 435/50R19.5 | 18         | 156        | J             | 14.00        | ---                            | --- | 4000   | 850 | 931                   | 438                | 12.5             | ETRTO          |
| 435/50R19.5 | 20         | 160        | J             | 14.00        | ---                            | --- | 4500   | 900 | 931                   | 438                | 12.5             | ETRTO          |
| 445/45R19.5 | 18         | 156        | J             | 15.00        | ---                            | --- | 4000   | 900 | 895                   | 446                | 15.5             | ETRTO          |
| 445/45R19.5 | 20         | 160        | J             | 15.00        | ---                            | --- | 4500   | 900 | 895                   | 446                | 15.5             | ETRTO          |



# LLF16e+

## RADIAL TRUCK TIRE (LONG HAUL STEER)

- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 14         | 144/142    | M             | 8.25         | 2650                           | 720 | 2800   | 720 | 1054                  | 279                | 14.5             | TRA            |
| 11R22.5     | 16         | 146/143    | M             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 14.5             | TRA            |
| 11R24.5     | 14         | 146/143    | M             | 8.25         | 2725                           | 720 | 3000   | 720 | 1104                  | 279                | 14.5             | TRA            |
| 11R24.5     | 16         | 149/146    | M             | 8.25         | 3000                           | 830 | 3250   | 830 | 1104                  | 279                | 14.5             | TRA            |
| 295/75R22.5 | 14         | 144/141    | M             | 9.00         | 2575                           | 760 | 2800   | 760 | 1014                  | 298                | 14.5             | TRA            |
| 295/75R22.5 | 16         | 146/143    | M             | 9.00         | 2725                           | 830 | 3000   | 830 | 1014                  | 298                | 14.5             | TRA            |
| 285/75R24.5 | 14         | 144/141    | M             | 8.25         | 2575                           | 760 | 2800   | 760 | 1050                  | 283                | 14.5             | TRA            |
| 285/75R24.5 | 16         | 147/144    | M             | 8.25         | 2800                           | 830 | 3075   | 830 | 1050                  | 283                | 14.5             | TRA            |



# T830

## RADIAL TRUCK TIRE

- Suitable for the trailer axle of the trucks running on highway.
- Low fuel consumption.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 385/55R22.5 | 18         | 158        | L             | 12.25        | ---                            | --- | 4250   | 850 | 996                   | 386                | 15.5             | ETRTO          |
| 385/55R22.5 | 20         | 160        | J             | 12.25        | ---                            | --- | 4500   | 900 | 996                   | 386                | 15.5             | ETRTO          |



# LLD37e+

## RADIAL TRUCK TIRE

- Suitable for the drive axle of the trucks running on highway.
- Good braking and grip on wet road.
- Long life.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 14         | 144/142    | M             | 8.25         | 2650                           | 720 | 2800   | 720 | 1065                  | 279                | 17.5             | TRA            |
| 11R22.5     | 16         | 146/143    | M             | 8.25         | 2725                           | 830 | 3000   | 830 | 1065                  | 279                | 17.5             | TRA            |
| 11R24.5     | 14         | 146/143    | M             | 8.25         | 2725                           | 720 | 3000   | 720 | 1116                  | 279                | 22.0             | TRA            |
| 11R24.5     | 16         | 149/146    | M             | 8.25         | 3000                           | 830 | 3250   | 830 | 1116                  | 279                | 22.0             | TRA            |
| 295/75R22.5 | 14         | 144/141    | M             | 9.00         | 2575                           | 760 | 2800   | 760 | 1026                  | 298                | 22.0             | TRA            |
| 295/75R22.5 | 16         | 146/143    | M             | 9.00         | 2725                           | 830 | 3000   | 830 | 1026                  | 298                | 22.0             | TRA            |
| 285/75R24.5 | 14         | 144/141    | M             | 8.25         | 2575                           | 760 | 2800   | 760 | 1062                  | 283                | 22.0             | TRA            |
| 285/75R24.5 | 16         | 147/144    | M             | 8.25         | 2800                           | 830 | 3075   | 830 | 1062                  | 283                | 22.0             | TRA            |

# REGIONAL



## KTA303

RADIAL TRUCK TIRE(FOR NATIONAL AND REGIONAL TRANSPORTATION )

Suitable for all position axle of trucks running under a wide range of use, from highway to light unpaved road.

- Optimization of the shoulder block improves resistance to shouder damage.
- Lasting grip and stability,with stone rejection design.
- HAT technology: low heat generation.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 9.00R20     | 14         | 141/139    | K             | 7.0          | 2430                           | 790 | 2575   | 790 | 1019                  | 259                | 14.5             | GB             |
| 9.00R20     | 16         | 144/142    | K             | 7.0          | 2650                           | 900 | 2800   | 900 | 1019                  | 259                | 14.5             | GB             |
| 10.00R20    | 16         | 146/143    | K             | 7.5          | 2725                           | 830 | 3000   | 830 | 1054                  | 278                | 14.5             | GB             |
| 10.00R20    | 18         | 149/146    | K             | 7.5          | 3000                           | 930 | 3250   | 930 | 1054                  | 278                | 14.5             | GB             |
| 11.00R20    | 16         | 150/147    | K             | 8.0          | 3075                           | 830 | 3350   | 830 | 1085                  | 293                | 15.5             | GB             |
| 11.00R20    | 18         | 152/149    | K             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 15.5             | GB             |
| 12.00R20    | 18         | 154/151    | K             | 8.5          | 3450                           | 830 | 3750   | 830 | 1125                  | 315                | 15.5             | GB             |
| 9.5R17.5    | 14         | 129/127    | M             | 6.75         | 1750                           | 750 | 1850   | 750 | 842                   | 240                | 11.5             | ETRTO          |
| 9.5R17.5    | 18         | 143/141    | M             | 6.75         | 2575                           | 875 | 2725   | 875 | 842                   | 240                | 11.5             | ETRTO          |
| 11R22.5     | 16         | 146/143    | L             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 14.0             | TRA            |
| 11R22.5     | 16         | 148/145    | L             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 14.0             | ETRTO          |
| 12R22.5     | 16         | 152/148    | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 15.0             | ETRTO          |
| 12R22.5     | 18         | 152/149    | L             | 9.00         | 3250                           | 930 | 3550   | 930 | 1085                  | 300                | 15.0             | GB             |
| 295/80R22.5 | 16         | 152/148    | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 14.0             | ETRTO          |
| 295/80R22.5 | 18         | 152/149    | L             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 14.0             | GB             |
| 315/80R22.5 | 18         | 154/150    | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 14.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | L             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 14.0             | ETRTO          |
| 215/75R17.5 | 14         | 126/124    | L             | 6.00         | 1600                           | 700 | 1700   | 700 | 767                   | 211                | 12.0             | ETRTO          |
| 215/75R17.5 | 16         | 135/133    | L/J           | 6.00         | 2060                           | 850 | 2180   | 850 | 767                   | 211                | 12.0             | ETRTO          |
| 235/75R17.5 | 14         | 132/130    | L             | 6.75         | 1900                           | 775 | 2000   | 775 | 797                   | 233                | 12.5             | ETRTO          |
| 235/75R17.5 | 16         | 141/140    | L             | 6.75         | 2500                           | 850 | 2575   | 850 | 797                   | 233                | 12.5             | ETRTO          |
| 235/75R17.5 | 18         | 143/141    | L/J           | 6.75         | 2575                           | 875 | 2725   | 875 | 797                   | 233                | 12.5             | ETRTO          |
| 265/70R19.5 | 14         | 136/134    | M             | 7.50         | 2120                           | 725 | 2240   | 725 | 867                   | 262                | 12.5             | ETRTO          |
| 265/70R19.5 | 16         | 140/138    | M             | 7.50         | 2360                           | 775 | 2500   | 775 | 867                   | 262                | 12.5             | ETRTO          |
| 265/70R19.5 | 18         | 143/141    | J             | 7.50         | 2575                           | 850 | 2725   | 850 | 867                   | 262                | 12.5             | ETRTO          |
| 385/65R22.5 | 18         | 158        | K             | 11.75        | —                              | —   | 4250   | 850 | 1072                  | 389                | 16.0             | ETRTO          |
| 385/65R22.5 | 20         | 160        | K             | 11.75        | —                              | —   | 4500   | 900 | 1072                  | 389                | 16.0             | ETRTO          |



# KTD303

RADIAL TRUCK TIRE(FOR NATIONAL AND REGIONAL TRANSPORTATION )

- Suitable for drive axle of trucks running under a wide range of use, from highway to light unpaved road.
- Optimization of the shoulder block improves resistance to shouder damage.
- Lasting grip and stability with M+S.
- HAT technology: low heat generation.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 9.00R20     | 14         | 141/139    | K             | 7.0          | 2430                           | 790 | 2575   | 790 | 1019                  | 259                | 17.5             | GB             |
| 9.00R20     | 16         | 144/142    | K             | 7.0          | 2650                           | 900 | 2800   | 900 | 1019                  | 259                | 17.5             | GB             |
| 10.00R20    | 16         | 146/143    | K             | 7.5          | 2725                           | 830 | 3000   | 830 | 1054                  | 278                | 17.5             | GB             |
| 10.00R20    | 18         | 149/146    | K             | 7.5          | 3000                           | 930 | 3250   | 930 | 1054                  | 278                | 17.5             | GB             |
| 9.5R17.5    | 14         | 129/127    | L             | 6.75         | 1750                           | 750 | 1850   | 750 | 842                   | 240                | 14.5             | ETRTO          |
| 9.5R17.5    | 18         | 143/141    | L             | 6.75         | 2575                           | 875 | 2725   | 875 | 842                   | 240                | 14.5             | ETRTO          |
| 12R22.5     | 16         | 152/148    | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 19.0             | ETRTO          |
| 12R22.5     | 18         | 152/149    | L             | 9.00         | 3250                           | 930 | 3550   | 930 | 1085                  | 300                | 19.0             | GB             |
| 295/80R22.5 | 16         | 152/148    | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 17.0             | ETRTO          |
| 295/80R22.5 | 18         | 152/149    | L             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 17.0             | GB             |
| 315/80R22.5 | 18         | 154/150    | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 18.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | L             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 18.0             | ETRTO          |
| 215/75R17.5 | 14         | 126/124    | L             | 6.00         | 1600                           | 700 | 1700   | 700 | 767                   | 211                | 14.0             | ETRTO          |
| 215/75R17.5 | 16         | 135/133    | L             | 6.00         | 2060                           | 850 | 2180   | 850 | 767                   | 211                | 14.0             | ETRTO          |
| 235/75R17.5 | 14         | 132/130    | L             | 6.75         | 1900                           | 775 | 2000   | 775 | 797                   | 233                | 14.5             | ETRTO          |
| 235/75R17.5 | 16         | 141/140    | L             | 6.75         | 2500                           | 850 | 2575   | 850 | 797                   | 233                | 14.5             | ETRTO          |
| 235/75R17.5 | 18         | 143/141    | L             | 6.75         | 2575                           | 875 | 2725   | 875 | 797                   | 233                | 14.5             | ETRTO          |
| 265/70R19.5 | 14         | 136/134    | M             | 7.50         | 2120                           | 725 | 2240   | 725 | 867                   | 262                | 14.5             | ETRTO          |
| 265/70R19.5 | 16         | 140/138    | M             | 7.50         | 2360                           | 775 | 2500   | 775 | 867                   | 262                | 14.5             | ETRTO          |
| 265/70R19.5 | 18         | 143/141    | M             | 7.50         | 2575                           | 830 | 2725   | 830 | 867                   | 262                | 14.5             | ETRTO          |



# KLS200

RADIAL TRUCK TIRE (REGIONAL STEER)

- Long life.
- Retreadability.
- Low eccentric wear.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 265/70R19.5 | 14         | 136/134    | M             | 7.50         | 2120                           | 725 | 2240   | 725 | 867                   | 262                | 13.5             | ETRTO          |
| 265/70R19.5 | 16         | 140/138    | M             | 7.50         | 2360                           | 775 | 2500   | 775 | 867                   | 262                | 13.5             | ETRTO          |
| 265/70R19.5 | 18         | 143/141    | J             | 7.50         | 2575                           | 850 | 2725   | 850 | 867                   | 262                | 13.5             | ETRTO          |
| 285/70R19.5 | 18         | 146/144    | M             | 8.25         | 2800                           | 900 | 3000   | 900 | 895                   | 283                | 13.5             | ETRTO          |
| 285/70R19.5 | 18         | 150/148    | J             | 8.25         | 3150                           | 900 | 3350   | 900 | 895                   | 283                | 13.5             | ETRTO          |
| 305/70R19.5 | 16         | 144/141    | M             | 9.00         | 2575                           | 760 | 2800   | 760 | 923                   | 305                | 13.5             | TRA            |
| 305/70R19.5 | 18         | 146/143    | M             | 9.00         | 2725                           | 830 | 3000   | 830 | 923                   | 305                | 13.5             | TRA            |
| 305/70R19.5 | 18         | 148/145    | M             | 9.00(8.25)   | 2900                           | 850 | 3150   | 850 | 923                   | 305                | 13.5             | ETRTO          |



# LDL161

RADIAL TRUCK TIRE

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

| Size     | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|          |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|          |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 10.00R20 | 18         | 149/146    | K             | 7.5          | 3000                           | 930 | 3250   | 930 | 1054                  | 278                | 20.0             | GB             |



# KLD200

RADIAL TRUCK TIRE

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 265/70R19.5 | 14         | 136/134    | M             | 7.50         | 2120                           | 725 | 2240   | 725 | 867                   | 262                | 15.5             | ETRTO          |
| 265/70R19.5 | 16         | 140/138    | M             | 7.50         | 2360                           | 775 | 2500   | 775 | 867                   | 262                | 15.5             | ETRTO          |
| 285/70R19.5 | 18         | 146/144    | M             | 8.25         | 2800                           | 900 | 3000   | 900 | 895                   | 283                | 16.0             | ETRTO          |
| 305/70R19.5 | 16         | 144/141    | M             | 9.00         | 2575                           | 760 | 2800   | 760 | 923                   | 305                | 16.0             | TRA            |
| 305/70R19.5 | 18         | 146/143    | M             | 9.00         | 2725                           | 830 | 3000   | 830 | 923                   | 305                | 16.0             | TRA            |
| 305/70R19.5 | 18         | 148/145    | M             | 9.00(8.25)   | 2900                           | 850 | 3150   | 850 | 923                   | 305                | 16.0             | ETRTO          |



# KTD101

RADIAL TRUCK TIRE (FOR NATIONAL AND REGIONAL TRANSPORTATION )

Suitable for the drive axle of trucks running on highway, national road, general road.

- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with M+S marking.
- High wear resistance.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 12R22.5     | 16         | 152/148    | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 22.0             | ETRTO          |
| 12R22.5     | 18         | 152/149    | L             | 9.00         | 3250                           | 930 | 3550   | 930 | 1085                  | 300                | 22.0             | GB             |
| 295/80R22.5 | 18         | 154/149    | L             | 9.00         | 3250                           | 850 | 3750   | 850 | 1044                  | 298                | 23.0             | ETRTO          |
| 295/80R22.5 | 18         | 152/149    | L             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 23.0             | GB             |
| 295/80R22.5 | 16         | 152/148    | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 23.0             | ETRTO          |
| 295/80R22.5 | 16         | 150/147    | L             | 9.00         | 3075                           | 830 | 3350   | 830 | 1044                  | 298                | 23.0             | GB             |



# KTD200

RADIAL TRUCK TIRE (FOR NATIONAL AND REGIONAL TRANSPORTATION )

Suitable for the drive axle of trucks running on highway, national road, general road.

- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with M+S and 3PMSF marking.
- High wear resistance.

| Size        | Ply Rating | Load Index       | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |                  |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |                  |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 315/80R22.5 | 18         | 154/150          | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 22.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150(154/150) | L(M)          | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 22.0             | ETRTO          |
| 315/70R22.5 | 16         | 154/150(152/148) | L(M)          | 9.00         | 3350                           | 900 | 3750   | 900 | 1014                  | 312                | 20.0             | ETRTO          |
| 315/60R22.5 | 16         | 152/148          | L             | 9.75         | 3150                           | 900 | 3550   | 900 | 950                   | 313                | 19.5             | ETRTO          |



# KTS300

RADIAL TRUCK TIRE (FOR NATIONAL AND REGIONAL TRANSPORTATION )

Suitable for the steer axle of trucks running under a wide range of use, from highway to light unpaved road.

- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with stone rejection design.
- High wear resistance.

| Size        | Ply Rating | Load Index       | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |                  |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |                  |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 16         | 146/143          | L             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 16.5             | TRA            |
| 11R22.5     | 14         | 144/142          | L             | 8.25         | 2650                           | 720 | 2800   | 720 | 1054                  | 279                | 16.5             | TRA            |
| 11R22.5     | 16         | 148/14.5         | L             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 16.5             | ETRTO          |
| 12R22.5     | 16         | 152/148          | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 17.0             | ETRTO          |
| 295/80R22.5 | 18         | 154/149          | L             | 9.00         | 3250                           | 850 | 3750   | 850 | 1044                  | 298                | 16.5             | ETRTO          |
| 295/80R22.5 | 16         | 152/148          | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 16.5             | ETRTO          |
| 315/80R22.5 | 18         | 154/150          | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 15.5             | ETRTO          |
| 315/80R22.5 | 20         | 156/150(154/150) | L(M)          | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 15.5             | ETRTO          |
| 315/80R22.5 | 20         | 157/154          | L             | 9.00         | 3750                           | 900 | 4125   | 900 | 1076                  | 312                | 15.5             | TRA            |
| 315/80R22.5 | 22         | 158/150(154/150) | L(M)          | 9.00         | 3350                           | 900 | 4250   | 900 | 1076                  | 312                | 15.5             | ETRTO          |
| 315/70R22.5 | 16         | 154/150(152/148) | L(M)          | 9.00         | 3350                           | 900 | 3750   | 900 | 1014                  | 312                | 15.5             | ETRTO          |
| 315/70R22.5 | 18         | 156/150(154/150) | L(M)          | 9.00         | 3350                           | 900 | 4000   | 900 | 1014                  | 312                | 15.5             | ETRTO          |
| 315/60R22.5 | 16         | 152/148          | L             | 9.75         | 3150                           | 900 | 3550   | 900 | 950                   | 313                | 14.5             | ETRTO          |
| 315/60R22.5 | 18         | 154/150(152/148) | L(M)          | 9.75         | 3350                           | 900 | 3750   | 900 | 950                   | 313                | 14.5             | ETRTO          |
| 295/60R22.5 | 16         | 150/147          | L             | 9.00         | 3075                           | 900 | 3350   | 900 | 926                   | 292                | 14.0             | ETRTO          |
| 385/55R22.5 | 18         | 158              | L             | 12.25        | --                             | --  | 4250   | 850 | 996                   | 386                | 13.5             | ETRTO          |
| 385/55R22.5 | 20         | 160(158)         | K(L)          | 12.25        | --                             | --  | 4500   | 900 | 996                   | 386                | 13.5             | ETRTO          |
| 385/65R22.5 | 20         | 160(158)         | K(L)          | 11.75        | --                             | --  | 4500   | 900 | 1072                  | 389                | 15.5             | ETRTO          |
| 385/65R22.5 | 24         | 164(158)         | K(L)          | 11.75        | --                             | --  | 5000   | 900 | 1072                  | 389                | 15.5             | ETRTO          |



## KTD300

RADIAL TRUCK TIRE (FOR NATIONAL AND REGIONAL TRANSPORTATION )

- Suitable for the drive axle of trucks running under an wide range of use, from highway to light unpaved road.
- Optimization of the shoulder block improves resistance to shoulder damage.
- Lasting grip and stability with M+S and 3PMSF marking.
- High wear resistance.

| Size        | Ply Rating | Load Index       | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |                  |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |                  |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 16         | 146/143          | L             | 8.25         | 2725                           | 830 | 3000   | 830 | 1065                  | 279                | 22.0             | TRA            |
| 11R22.5     | 14         | 144/142          | L             | 8.25         | 2650                           | 720 | 2800   | 720 | 1065                  | 279                | 22.0             | TRA            |
| 11R22.5     | 16         | 148/145          | L             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 22.0             | ETRTO          |
| 12R22.5     | 16         | 152/148          | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 22.0             | ETRTO          |
| 12R22.5     | 18         | 152/149          | L             | 9.00         | 3250                           | 930 | 3550   | 930 | 1085                  | 300                | 22.0             | GB             |
| 295/80R22.5 | 16         | 152/148          | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 20.5             | ETRTO          |
| 315/80R22.5 | 18         | 154/150          | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 22.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150(154/150) | L(M)          | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 22.0             | ETRTO          |
| 315/70R22.5 | 16         | 154/150(152/148) | L(M)          | 9.00         | 3350                           | 900 | 3750   | 900 | 1014                  | 312                | 20.0             | ETRTO          |
| 315/70R22.5 | 18         | 156/150(154/150) | L(M)          | 9.00         | 3350                           | 900 | 4000   | 900 | 1014                  | 312                | 20.0             | ETRTO          |
| 315/60R22.5 | 16         | 152/148          | L             | 9.75         | 3150                           | 900 | 3550   | 900 | 950                   | 313                | 19.5             | ETRTO          |
| 295/60R22.5 | 16         | 150/147          | L             | 9.00         | 3075                           | 900 | 3350   | 900 | 926                   | 292                | 18.0             | ETRTO          |



## KTD301

RADIAL TRUCK TIRE

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

| Size    | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|---------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|         |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|         |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5 | 14         | 144/142    | L             | 8.25         | 2650                           | 720 | 2800   | 720 | 1054                  | 279                | 22.5             | TRA            |
| 11R22.5 | 16         | 146/143    | L             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 22.5             | TRA            |
| 11R22.5 | 16         | 148/145    | L             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 22.5             | ETTRO          |
| 11R24.5 | 14         | 146/143    | L             | 8.25         | 2725                           | 720 | 3000   | 720 | 1104                  | 279                | 22.5             | TRA            |
| 11R24.5 | 16         | 149/146    | L             | 8.25         | 3000                           | 830 | 3250   | 830 | 1104                  | 279                | 22.5             | TRA            |



## KTA20

RADIAL TRUCK TIRE

- Suitable for all position of trucks using for high traction and high scrub applications.
- Wide, strong shoulder ribs increase tread life.
- Lasting grip and stability.
- High wear resistance.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 14         | 144/142    | L             | 8.25         | 2650                           | 720 | 2800   | 720 | 1054                  | 279                | 15.1             | TRA            |
| 11R22.5     | 16         | 146/143    | L             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 15.1             | TRA            |
| 11R24.5     | 14         | 146/143    | L             | 8.25         | 2725                           | 720 | 3000   | 720 | 1104                  | 279                | 15.1             | TRA            |
| 11R24.5     | 16         | 149/146    | L             | 8.25         | 3000                           | 830 | 3250   | 830 | 1104                  | 279                | 15.1             | TRA            |
| 295/75R22.5 | 14         | 144/141    | L             | 9.00         | 2575                           | 760 | 2800   | 760 | 1014                  | 298                | 15.1             | TRA            |
| 295/75R22.5 | 16         | 146/143    | L             | 9.00         | 2725                           | 830 | 3000   | 830 | 1014                  | 298                | 15.1             | TRA            |
| 285/75R24.5 | 14         | 144/141    | L             | 8.25         | 2575                           | 760 | 2800   | 760 | 1050                  | 283                | 15.1             | TRA            |
| 285/75R24.5 | 16         | 147/144    | L             | 8.25         | 2800                           | 830 | 3075   | 830 | 1050                  | 283                | 15.1             | TRA            |



## LFL185

RADIAL TRUCK TIRE (REGIONAL STEER)

- Optimization of the shoulder and the proportion of pattern block in the middle.
- Four straight groove matching S type variable angle groove design and ensure good steering tyre and self-cleaning properties.
- Ultra strong skeleton materials applications and promote tire safety performance.
- High wear resistance of new formula application and wear mileage increases more than 20%.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 16         | 146/143    | M             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 16.5             | TRA            |
| 11R22.5     | 16         | 148/145    | L             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 16.5             | ETRTO          |
| 12R22.5     | 16         | 152/148    | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 17.0             | ETRTO          |
| 12R22.5     | 18         | 152/149    | L             | 9.00         | 3250                           | 930 | 3550   | 930 | 1085                  | 300                | 17.0             | GB             |
| 295/80R22.5 | 16         | 152/148    | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 17.0             | ETRTO          |
| 295/80R22.5 | 18         | 152/149    | M             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 17.0             | GB             |
| 315/80R22.5 | 18         | 154/150    | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 17.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | L             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 17.0             | ETRTO          |



# LFL177

RADIAL TRUCK TIRE (REGIONAL STEER)

- Optimization of the shoulder and the proportion of pattern block in the middle.
- Four straight groove matching S type variable angle groove design and ensure good steering tyre and self-cleaning properties.
- Ultra strong skeleton materials applications and promote tire safety performance.
- High wear resistance of new formula application and wear mileage increases more than 20%.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 16         | 146/143    | M             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 16.5             | TRA            |
| 11R22.5     | 16         | 148/145    | M             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 16.5             | ETRTO          |
| 12R22.5     | 16         | 152/148    | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 17.0             | ETRTO          |
| 12R22.5     | 18         | 152/149    | L             | 9.00         | 3250                           | 930 | 3550   | 930 | 1085                  | 300                | 17.0             | GB             |
| 295/80R22.5 | 16         | 152/148    | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 17.0             | ETRTO          |
| 295/80R22.5 | 18         | 152/149    | M             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 17.0             | GB             |
| 315/80R22.5 | 18         | 154/150    | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 17.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | L             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 17.0             | ETRTO          |



# LTL863

RADIAL TRUCK TIRE (REGIONAL TRAILER)

- Typical combined pattern design offers optimal trailer performance.
- Low rolling resistance.
- Wear-resistance compound reduces shifting to prevent uneven wear.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 385/65R22.5 | 18         | 158        | K             | 11.75        | ---                            | --- | 4250   | 850 | 1072                  | 389                | 16.5             | ETRTO          |
| 385/65R22.5 | 20         | 160(158)   | J(L)          | 11.75        | ---                            | --- | 4500   | 900 | 1072                  | 389                | 16.5             | ETRTO          |
| 385/65R22.5 | 24         | 164        | J             | 11.75        | ---                            | --- | 5000   | 900 | 1072                  | 389                | 16.5             | ETRTO          |
| 425/65R22.5 | 18         | 162        | K             | 12.25        | ---                            | --- | 4750   | 760 | 1124                  | 422                | 17.5             | TRA            |
| 425/65R22.5 | 20         | 165        | J/K           | 12.25        | ---                            | --- | 5150   | 825 | 1124                  | 422                | 17.5             | ETRTO          |
| 445/65R22.5 | 20         | 168        | J/K           | 13.00        | ---                            | --- | 5600   | 830 | 1150                  | 444                | 18.0             | TRA            |
| 445/65R22.5 | 20         | 169        | J/K           | 13.00        | ---                            | --- | 5800   | 900 | 1150                  | 444                | 18.0             | ETRTO          |
| 385/55R22.5 | 18         | 158        | K             | 12.25        | ---                            | --- | 4250   | 850 | 996                   | 386                | 16.5             | ETRTO          |
| 385/55R22.5 | 20         | 160(158)   | J(L)          | 12.25        | ---                            | --- | 4500   | 900 | 996                   | 386                | 16.5             | ETRTO          |



# LDL186

RADIAL TRUCK TIRE (REGIONAL DRIVE)

- Optimization of the shoulder and the proportion of pattern block in the middle.
- Classic mahjong block pattern style matching variable angle groove design and ensure a strong drive and self-cleaning.
- Ultra strong skeleton materials applications and promote tire safety performance.
- High wear resistance of new formula application and wear mileage increases more than 20%.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 12R22.5     | 16         | 152/148    | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 22.0             | ETRTO          |
| 12R22.5     | 18         | 152/149    | L             | 9.00         | 3250                           | 930 | 3550   | 930 | 1085                  | 300                | 22.0             | GB             |
| 295/80R22.5 | 16         | 152/148    | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 23.0             | ETRTO          |
| 295/80R22.5 | 18         | 152/149    | L             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 23.0             | GB             |
| 315/80R22.5 | 18         | 154/150    | L             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 23.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | L             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 23.0             | ETRTO          |



# LDL813

RADIAL TRUCK TIRE (REGIONAL DRIVE)

- Long life.
- Good grip performance.
- Retreadability.
- Low eccentric wear.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 14         | 144/142    | L             | 8.25         | 2650                           | 720 | 2800   | 720 | 1059                  | 279                | 20.0             | TRA            |
| 11R22.5     | 16         | 146/143    | L             | 8.25         | 2725                           | 830 | 3000   | 830 | 1059                  | 279                | 20.0             | TRA            |
| 11R22.5     | 16         | 148/145    | L             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 20.0             | ETRTO          |
| 12R22.5     | 16         | 152/148    | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 21.0             | ETRTO          |
| 12R22.5     | 18         | 152/149    | L             | 9.00         | 3250                           | 930 | 3550   | 930 | 1085                  | 300                | 21.0             | GB             |
| 13R22.5     | 18         | 156/150    | L             | 9.75         | 3350                           | 875 | 4000   | 875 | 1124                  | 320                | 21.0             | ETRTO          |
| 315/80R22.5 | 18         | 154/150    | L             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 21.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | L             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 21.0             | ETRTO          |



# LTL812

RADIAL TRUCK TIRE (REGIONAL STEER)

- Long life.
- Retreadability.
- Low eccentric wear.

| Size        | Ply Rating | Load Index       | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |                  |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |                  |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11.00R20    | 16         | 150/147          | K             | 8.0          | 3075                           | 830 | 3350   | 830 | 1085                  | 293                | 16.0             | GB             |
| 11.00R20    | 18         | 152/149          | K             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 16.0             | GB             |
| 12R22.5     | 16         | 152/148          | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 17.0             | ETRTO          |
| 12R22.5     | 18         | 152/149          | L             | 9.00         | 3250                           | 930 | 3550   | 930 | 1085                  | 300                | 17.0             | GB             |
| 295/80R22.5 | 16         | 152/148          | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 17.0             | ETRTO          |
| 295/80R22.5 | 18         | 152/149          | M             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 17.0             | GB             |
| 295/80R22.5 | 18         | 154/149          | M             | 9.00         | 3250                           | 850 | 3750   | 850 | 1044                  | 298                | 17.0             | ETRTO          |
| 315/80R22.5 | 18         | 154/150          | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 17.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150          | L             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 17.0             | ETRTO          |
| 315/80R22.5 | 22         | 158/150(154/150) | L(M)          | 9.00         | 3350                           | 900 | 4250   | 900 | 1076                  | 312                | 17.0             | ETRTO          |
| 285/70R19.5 | 16         | 140/137          | M             | 8.25         | 2300                           | 725 | 2500   | 725 | 895                   | 283                | 16.0             | ETRTO          |
| 285/70R19.5 | 18         | 146/144          | M             | 8.25         | 2800                           | 900 | 3000   | 900 | 895                   | 283                | 16.0             | ETRTO          |
| 285/70R19.5 | 18         | 150/148          | J             | 8.25         | 3150                           | 900 | 3350   | 900 | 895                   | 283                | 16.0             | ETRTO          |
| 315/70R22.5 | 16         | 154/150(152/148) | L(M)          | 9.00         | 3350                           | 900 | 3750   | 900 | 1014                  | 312                | 17.0             | ETRTO          |
| 315/70R22.5 | 18         | 156/150(154/150) | L(M)          | 9.00         | 3350                           | 900 | 4000   | 900 | 1014                  | 312                | 17.0             | ETRTO          |
| 315/60R22.5 | 16         | 152/148          | L             | 9.75         | 3150                           | 900 | 3550   | 900 | 950                   | 313                | 17.0             | ETRTO          |
| 315/60R22.5 | 18         | 154/150(152/148) | L(M)          | 9.75         | 3350                           | 900 | 3750   | 900 | 950                   | 313                | 17.0             | ETRTO          |



# LDL831

RADIAL TRUCK TIRE (REGIONAL DRIVE)

- Typical block pattern design makes good grip performance.
- High wear resistance and long life.
- Retreadability.
- Low eccentric wear.

| Size        | Ply Rating | Load Index       | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |                  |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |                  |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 14         | 144/142          | L             | 8.25         | 2650                           | 720 | 2800   | 720 | 1065                  | 279                | 22.0             | TRA            |
| 11R22.5     | 16         | 146/143          | L             | 8.25         | 2725                           | 830 | 3000   | 830 | 1065                  | 279                | 22.0             | TRA            |
| 11R22.5     | 16         | 148/145          | L             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 22.0             | ETRTO          |
| 12R22.5     | 16         | 152/148          | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 23.0             | ETRTO          |
| 12R22.5     | 18         | 152/149          | M             | 9.00         | 3250                           | 930 | 3550   | 930 | 1085                  | 300                | 23.0             | GB             |
| 295/80R22.5 | 16         | 152/148          | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 23.0             | ETRTO          |
| 295/80R22.5 | 18         | 152/149          | L             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 23.0             | GB             |
| 315/80R22.5 | 18         | 154/150          | L             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 23.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150          | L             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 23.0             | ETRTO          |
| 285/70R19.5 | 16         | 140/137          | M             | 8.25         | 2300                           | 725 | 2500   | 725 | 895                   | 283                | 19.0             | ETRTO          |
| 285/70R19.5 | 18         | 146/144          | M             | 8.25         | 2800                           | 900 | 3000   | 900 | 895                   | 283                | 19.0             | ETRTO          |
| 285/70R19.5 | 18         | 150/148          | J             | 8.25         | 3150                           | 900 | 3350   | 900 | 895                   | 283                | 19.0             | ETRTO          |
| 315/70R22.5 | 16         | 154/150(152/148) | L(M)          | 9.00         | 3350                           | 900 | 3750   | 900 | 1014                  | 312                | 23.0             | ETRTO          |
| 315/70R22.5 | 18         | 156/150(154/150) | L(M)          | 9.00         | 3350                           | 900 | 4000   | 900 | 1014                  | 312                | 23.0             | ETRTO          |
| 315/60R22.5 | 16         | 152/148          | L             | 9.75         | 3150                           | 900 | 3550   | 900 | 950                   | 313                | 23.0             | ETRTO          |



# LLF01

RADIAL TRUCK TIRE

- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

| Size        | Ply Rating | Load Index       | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |                  |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |                  |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 275/80R22.5 | 16         | 149/146          | M             | 8.25         | 3000                           | 850 | 3250   | 850 | 1012                  | 276                | 14.5             | ETRTO          |
| 315/60R22.5 | 16         | 152/148          | M             | 9.75         | 3150                           | 900 | 3550   | 900 | 950                   | 313                | 14.5             | ETRTO          |
| 315/60R22.5 | 18         | 154/150(152/148) | L(M)          | 9.75         | 3350                           | 900 | 3750   | 900 | 950                   | 313                | 14.5             | ETRTO          |
| 295/60R22.5 | 16         | 149/146          | M             | 9.00         | 3000                           | 900 | 3250   | 900 | 926                   | 292                | 14.5             | ETRTO          |



# LAL836

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

- Good handling and driving.
- Long life.
- Retreadability.
- Low eccentric wear

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11.00R20    | 16         | 150/147    | K             | 8.0          | 3075                           | 830 | 3350   | 830 | 1085                  | 293                | 17.0             | TRA            |
| 11.00R20    | 18         | 152/149    | K             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 17.0             | GB             |
| 12.00R20    | 18         | 154/151    | K             | 8.5          | 3450                           | 830 | 3750   | 830 | 1125                  | 315                | 18.5             | GB             |
| 12.00R20    | 20         | 156/153    | K             | 8.5          | 3650                           | 900 | 4000   | 900 | 1125                  | 315                | 18.5             | GB             |
| 11R22.5     | 14         | 144/142    | M             | 8.25         | 2650                           | 720 | 2800   | 720 | 1054                  | 279                | 16.5             | TRA            |
| 11R22.5     | 16         | 146/143    | M             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 16.5             | TRA            |
| 11R22.5     | 16         | 148/145    | M             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 16.5             | ETRTO          |
| 12R22.5     | 16         | 152/148    | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 18.0             | ETRTO          |
| 12R22.5     | 18         | 152/149    | K             | 9.00         | 3250                           | 930 | 3550   | 930 | 1085                  | 300                | 18.0             | GB             |
| 13R22.5     | 18         | 156/150    | L             | 9.75         | 3350                           | 875 | 4000   | 875 | 1124                  | 320                | 18.0             | ETRTO          |
| 295/80R22.5 | 16         | 152/148    | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 16.0             | ETRTO          |
| 295/80R22.5 | 18         | 152/149    | M             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 16.0             | GB             |
| 315/80R22.5 | 18         | 154/150    | L             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 18.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | K             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 18.0             | ETRTO          |



# F805

RADIAL TRUCK TIRE

- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 275/70R22.5 | 16         | 148/145    | M             | 8.25         | 2900                           | 900 | 3150   | 900 | 958                   | 276                | 14.5             | ETRTO          |
| 305/70R22.5 | 14         | 150/148    | L             | 9.00         | 3150                           | 850 | 3350   | 850 | 1000                  | 305                | 14.5             | ETRTO          |
| 305/70R22.5 | 16         | 152/148    | L             | 9.00         | 3150                           | 900 | 3550   | 900 | 1000                  | 305                | 14.5             | ETRTO          |
| 315/70R22.5 | 14         | 152/148    | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1014                  | 312                | 14.5             | ETRTO          |
| 315/70R22.5 | 16         | 154/150    | M             | 9.00         | 3350                           | 900 | 3750   | 900 | 1014                  | 312                | 14.5             | ETRTO          |



# LLF02

RADIAL TRUCK TIRE

- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

| Size        | Ply Rating | Load Index       | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |                  |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |                  |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 12R22.5     | 16         | 152/148          | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 14.5             | ETRTO          |
| 13R22.5     | 18         | 156/150          | K             | 9.75         | 3350                           | 875 | 4000   | 875 | 1124                  | 320                | 16.5             | ETRTO          |
| 295/80R22.5 | 16         | 152/148          | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 14.5             | ETRTO          |
| 295/80R22.5 | 18         | 152/149          | M             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 14.5             | GB             |
| 295/80R22.5 | 18         | 154/149          | M             | 9.00         | 3250                           | 850 | 3750   | 850 | 1044                  | 298                | 14.5             | ETRTO          |
| 315/80R22.5 | 18         | 154/150          | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 14.5             | ETRTO          |
| 315/80R22.5 | 20         | 156/150          | L             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 14.5             | ETRTO          |
| 315/80R22.5 | 22         | 158/150(154/150) | L(M)          | 9.00         | 3350                           | 900 | 4250   | 900 | 1076                  | 312                | 14.5             | ETRTO          |



# LLF06

RADIAL TRUCK TIRE

- Special design for all position of buses and steer or trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

| Size        | Ply Rating | Load Index       | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |                  |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |                  |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 9.00R20     | 14         | 141/139          | L             | 7.0          | 2430                           | 790 | 2575   | 790 | 1019                  | 259                | 14.0             | TRA            |
| 9.00R20     | 16         | 144/142          | K             | 7.0          | 2650                           | 900 | 2800   | 900 | 1019                  | 259                | 14.0             | GB             |
| 10.00R20    | 16         | 146/143          | L             | 7.5          | 2725                           | 830 | 3000   | 830 | 1054                  | 278                | 14.5             | TRA            |
| 10.00R20    | 18         | 149/146          | K             | 7.5          | 3000                           | 930 | 3250   | 930 | 1054                  | 278                | 14.5             | GB             |
| 11.00R20    | 16         | 150/147          | K             | 8.0          | 3075                           | 830 | 3350   | 830 | 1085                  | 293                | 15.5             | GB             |
| 11.00R20    | 18         | 152/149          | K             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 15.5             | GB             |
| 12.00R20    | 18         | 154/151          | K             | 8.5          | 3450                           | 830 | 3750   | 830 | 1125                  | 315                | 15.5             | TRA            |
| 11R22.5     | 14         | 144/142          | M             | 8.25         | 2650                           | 720 | 2800   | 720 | 1054                  | 279                | 14.5             | TRA            |
| 11R22.5     | 16         | 146/143          | M             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 14.5             | TRA            |
| 11R22.5     | 16         | 148/145          | M             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 14.5             | ETRTO          |
| 315/80R22.5 | 18         | 154/150          | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 14.5             | ETRTO          |
| 315/80R22.5 | 20         | 156/150          | L             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 14.5             | ETRTO          |
| 315/80R22.5 | 22         | 158/150(154/150) | L(M)          | 9.00         | 3350                           | 900 | 4250   | 900 | 1076                  | 312                | 14.5             | ETRTO          |



# F816

RADIAL TRUCK TIRE

- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 9.00R20     | 16         | 144/142    | K             | 7.0          | 2650                           | 900 | 2800   | 900 | 1019                  | 259                | 14.5             | GB             |
| 10.00R20    | 16         | 146/143    | L             | 7.5          | 2725                           | 830 | 3000   | 830 | 1054                  | 278                | 15.5             | TRA            |
| 11.00R20    | 16         | 150/147    | L             | 8.0          | 3075                           | 830 | 3350   | 830 | 1085                  | 293                | 15.5             | GB             |
| 11.00R20    | 18         | 152/149    | L             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 15.5             | GB             |
| 12.00R20    | 18         | 154/151    | L             | 8.5          | 3450                           | 830 | 3750   | 830 | 1125                  | 315                | 15.5             | TRA            |
| 11R22.5     | 14         | 144/142    | M             | 8.25         | 2650                           | 720 | 2800   | 720 | 1054                  | 279                | 14.5             | TRA            |
| 11R22.5     | 16         | 146/143    | M             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 14.5             | TRA            |
| 11R22.5     | 16         | 148/145    | M             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 14.5             | ETRTO          |
| 12R22.5     | 16         | 152/148    | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 16.0             | ETRTO          |
| 12R22.5     | 16         | 150/147    | M             | 9.00         | 3075                           | 830 | 3350   | 830 | 1085                  | 300                | 16.0             | GB             |
| 12R22.5     | 18         | 152/149    | L             | 9.00         | 3250                           | 930 | 3550   | 930 | 1085                  | 300                | 16.0             | GB             |
| 11R24.5     | 14         | 146/143    | M             | 8.25         | 2725                           | 720 | 3000   | 720 | 1104                  | 279                | 14.5             | TRA            |
| 11R24.5     | 16         | 149/146    | M             | 8.25         | 3000                           | 830 | 3250   | 830 | 1104                  | 279                | 14.5             | TRA            |
| 295/75R22.5 | 14         | 144/141    | M             | 9.00         | 2575                           | 760 | 2800   | 760 | 1014                  | 298                | 14.5             | TRA            |
| 295/75R22.5 | 16         | 146/143    | M             | 9.00         | 2725                           | 830 | 3000   | 830 | 1014                  | 298                | 14.5             | TRA            |
| 285/75R24.5 | 14         | 144/141    | M             | 8.25         | 2575                           | 760 | 2800   | 760 | 1050                  | 283                | 14.5             | TRA            |
| 285/75R24.5 | 16         | 147/144    | M             | 8.25         | 2800                           | 830 | 3075   | 830 | 1050                  | 283                | 14.5             | TRA            |



# F860

RADIAL TRUCK TIRE

- Special design for all position of buses and steer or trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kg  | kPa    | kPa |                       |                    |                  |                |
| 10.00R20    | 16         | 146/143    | L             | 7.5          | 2725                           | 830 | 3000   | 830 | 1054                  | 278                | 14.5             | TRA            |
| 10.00R20    | 18         | 149/146    | K             | 7.5          | 3000                           | 930 | 3250   | 930 | 1054                  | 278                | 14.5             | GB             |
| 11.00R20    | 16         | 150/147    | L             | 8.0          | 3075                           | 830 | 3350   | 830 | 1085                  | 293                | 15.5             | GB             |
| 11.00R20    | 18         | 152/149    | L             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 15.5             | GB             |
| 12.00R20    | 18         | 154/151    | L             | 8.5          | 3450                           | 830 | 3750   | 830 | 1125                  | 315                | 15.5             | TRA            |
| 11.00R22    | 16         | 152/149    | K             | 8.0          | 3250                           | 830 | 3550   | 830 | 1135                  | 293                | 14.5             | TRA            |
| 11.00R22    | 18         | 154/151    | K             | 8.0          | 3450                           | 930 | 3750   | 930 | 1135                  | 293                | 14.5             | GB             |
| 295/80R22.5 | 16         | 152/148    | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 16.0             | ETRTO          |
| 305/75R24.5 | 14         | 152/148    | L             | 9.00         | 3150                           | 800 | 3550   | 800 | 1080                  | 305                | 14.5             | ETRTO          |
| 305/75R24.5 | 16         | 154/149    | L             | 9.00         | 3250                           | 850 | 3750   | 850 | 1080                  | 305                | 14.5             | ETRTO          |



# F860+

RADIAL TRUCK TIRE

- Special design for steer and trailer axle of trucks.
- Good side-wear resistance.
- High-speed performance.
- New technology for tire to reduce the weight .

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 275/80R22.5 | 16         | 149/146    | M             | 8.25         | 3000                           | 850 | 3250   | 850 | 1012                  | 276                | 14.0             | ETTRO          |
| 295/80R22.5 | 16         | 152/148    | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 15.0             | ETRTO          |



# D905

RADIAL TRUCK TIRE

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 12R22.5     | 16         | 152/148    | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 20.0             | ETRTO          |
| 275/80R22.5 | 16         | 149/146    | M             | 8.25         | 3000                           | 850 | 3250   | 850 | 1012                  | 276                | 17               | ETTRO          |
| 295/80R22.5 | 16         | 152/148    | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 17.5             | ETRTO          |
| 295/80R22.5 | 18         | 152/149    | M             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 17.5             | GB             |
| 285/70R19.5 | 16         | 140/137    | M             | 8.25         | 2300                           | 725 | 2500   | 725 | 895                   | 283                | 16.0             | ETRTO          |
| 285/70R19.5 | 18         | 146/144    | M             | 8.25         | 2800                           | 900 | 3000   | 900 | 895                   | 283                | 16.0             | ETRTO          |
| 285/70R19.5 | 18         | 150/148    | J             | 8.25         | 3150                           | 900 | 3350   | 900 | 895                   | 283                | 16.0             | ETRTO          |
| 275/70R22.5 | 16         | 148/145    | M             | 8.25         | 2900                           | 900 | 3150   | 900 | 958                   | 276                | 17.5             | ETRTO          |
| 315/70R22.5 | 14         | 152/148    | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1014                  | 312                | 17.5             | ETRTO          |
| 315/70R22.5 | 16         | 154/150    | M             | 9.00         | 3350                           | 900 | 3750   | 900 | 1014                  | 312                | 17.5             | ETRTO          |



## D915

RADIAL TRUCK TIRE

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 295/60R22.5 | 16         | 149/146    | M             | 9.00         | 3000                           | 900 | 3250   | 900 | 926                   | 292                | 17.5             | ETRTO          |
| 315/60R22.5 | 16         | 152/148    | M             | 9.75         | 3150                           | 900 | 3550   | 900 | 950                   | 313                | 19.5             | ETRTO          |



## D930

RADIAL TRUCK TIRE

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11.00R22    | 16         | 152/149    | K             | 8.00         | 3250                           | 830 | 3550   | 830 | 1135                  | 293                | 19.5             | TRA            |
| 305/75R24.5 | 14         | 152/148    | L             | 9.00         | 3150                           | 800 | 3550   | 800 | 1080                  | 305                | 19.5             | ETRTO          |
| 305/75R24.5 | 16         | 154/149    | L             | 9.00         | 3250                           | 850 | 3750   | 850 | 1080                  | 305                | 19.5             | ETRTO          |



## D928

RADIAL TRUCK TIRE

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 9.00R20     | 16         | 144/142    | K             | 7.0          | 2650                           | 900 | 2800   | 900 | 1019                  | 259                | 17.5             | GB             |
| 10.00R20    | 16         | 146/143    | L             | 7.5          | 2725                           | 830 | 3000   | 830 | 1054                  | 278                | 20.0             | TRA            |
| 10.00R20    | 18         | 149/146    | K             | 7.5          | 3000                           | 930 | 3250   | 930 | 1054                  | 278                | 20.0             | GB             |
| 11.00R20    | 18         | 152/149    | K             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 19.5             | GB             |
| 11R22.5     | 14         | 144/142    | L             | 8.25         | 2650                           | 720 | 2800   | 720 | 1059                  | 279                | 20.5             | TRA            |
| 11R22.5     | 16         | 146/143    | L             | 8.25         | 2725                           | 830 | 3000   | 830 | 1059                  | 279                | 20.5             | TRA            |
| 11R22.5     | 16         | 148/145    | L             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 20.5             | ETRTO          |
| 11R24.5     | 14         | 146/143    | L             | 8.25         | 2725                           | 720 | 3000   | 720 | 1110                  | 279                | 20.5             | TRA            |
| 11R24.5     | 16         | 149/146    | L             | 8.25         | 3000                           | 830 | 3250   | 830 | 1110                  | 279                | 20.5             | TRA            |
| 295/75R22.5 | 14         | 144/141    | M             | 9.00         | 2575                           | 760 | 2800   | 760 | 1020                  | 298                | 20.5             | TRA            |
| 295/75R22.5 | 16         | 146/143    | M             | 9.00         | 2725                           | 830 | 3000   | 830 | 1020                  | 298                | 20.5             | TRA            |
| 285/75R24.5 | 14         | 144/141    | M             | 8.25         | 2575                           | 760 | 2800   | 760 | 1056                  | 283                | 20.5             | TRA            |
| 285/75R24.5 | 16         | 147/144    | M             | 8.25         | 2800                           | 830 | 3075   | 830 | 1056                  | 283                | 20.5             | TRA            |



## D935

RADIAL TRUCK TIRE

- Typical block pattern design suitable for the drive axle of trucks.
- Good braking and grip on the road.

| Size     | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|          |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|          |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 10.00R20 | 16         | 146/143    | L             | 7.5          | 2725                           | 830 | 3000   | 830 | 1054                  | 278                | 18.5             | TRA            |
| 10.00R20 | 18         | 149/146    | K             | 7.5          | 3000                           | 930 | 3250   | 930 | 1054                  | 278                | 18.5             | GB             |
| 11.00R20 | 18         | 152/149    | K             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 16.5             | GB             |



# T810

RADIAL TRUCK TIRE

Suitable for the trailer axle of the trucks running on the high-grade road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 14         | 144/142    | M             | 8.25         | 2650                           | 720 | 2800   | 720 | 1054                  | 279                | 10.75            | TRA            |
| 11R22.5     | 16         | 146/143    | M             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 10.75            | TRA            |
| 11R24.5     | 14         | 146/143    | M             | 8.25         | 2725                           | 720 | 3000   | 720 | 1104                  | 279                | 10.75            | TRA            |
| 11R24.5     | 16         | 149/146    | M             | 8.25         | 3000                           | 830 | 3250   | 830 | 1104                  | 279                | 10.75            | TRA            |
| 295/75R22.5 | 14         | 144/141    | M             | 9.00         | 2575                           | 760 | 2800   | 760 | 1014                  | 298                | 10.75            | TRA            |
| 295/75R22.5 | 16         | 146/143    | M             | 9.00         | 2725                           | 830 | 3000   | 830 | 1014                  | 298                | 10.75            | TRA            |
| 285/75R24.5 | 14         | 144/141    | M             | 8.25         | 2575                           | 760 | 2800   | 760 | 1050                  | 283                | 10.75            | TRA            |
| 285/75R24.5 | 16         | 147/144    | M             | 8.25         | 2800                           | 830 | 3075   | 830 | 1050                  | 283                | 10.75            | TRA            |
| 255/70R22.5 | 16         | 140/137    | M             | 7.50         | 2300                           | 830 | 2500   | 830 | 930                   | 255                | 10.75            | TRA            |



# LLA18

RADIAL TRUCK TIRE

Suitable for the trailer axle of the trucks running on the high-grade road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 385/65R22.5 | 18         | 158        | K             | 11.75        | ---                            | --- | 4250   | 850 | 1072                  | 389                | 16.5             | ETRTO          |
| 385/65R22.5 | 20         | 160        | J             | 11.75        | ---                            | --- | 4500   | 900 | 1072                  | 389                | 16.5             | ETRTO          |



# LLD37

RADIAL TRUCK TIRE

Suitable for the trailer axle of the trucks running on the multi road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 265/70R19.5 | 18         | 143/141    | J             | 7.50         | 2575                           | 850 | 2725   | 850 | 867                   | 262                | 16.0             | ETRTO          |



# LLA28

RADIAL TRUCK TIRE

Suitable for the trailer axle of the trucks running on the multi road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 425/65R22.5 | 18         | 162        | K             | 12.25        | ---                            | --- | 4750   | 760 | 1124                  | 422                | 17.5             | TRA            |
| 425/65R22.5 | 20         | 165        | J/K           | 12.25        | ---                            | --- | 5150   | 825 | 1124                  | 422                | 17.5             | ETRTO          |



# F820

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for all position axle of buses and medium trucks.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 265/70R19.5 | 14         | 136/134    | M             | 7.50         | 2120                           | 725 | 2240   | 725 | 867                   | 262                | 13.5             | ETRTO          |
| 265/70R19.5 | 16         | 140/138    | L             | 7.50         | 2360                           | 775 | 2500   | 775 | 867                   | 262                | 13.5             | ETRTO          |
| 265/70R19.5 | 18         | 143/141    | J             | 7.50         | 2575                           | 850 | 2725   | 850 | 867                   | 262                | 13.5             | ETRTO          |
| 285/70R19.5 | 16         | 144/142    | M             | 8.25         | 2650                           | 800 | 2800   | 800 | 895                   | 283                | 14.0             | ETRTO          |
| 285/70R19.5 | 18         | 146/144    | M             | 8.25         | 2800                           | 900 | 3000   | 900 | 895                   | 283                | 14.0             | ETRTO          |
| 285/70R19.5 | 18         | 150/147    | J             | 8.25         | 3075                           | 900 | 3350   | 900 | 895                   | 283                | 14.0             | ETRTO          |
| 255/70R22.5 | 14         | 136/133    | M             | 7.50         | 2060                           | 700 | 2240   | 700 | 930                   | 255                | 14.0             | ETRTO          |
| 255/70R22.5 | 16         | 140/137    | M             | 7.50         | 2300                           | 830 | 2500   | 830 | 930                   | 255                | 14.0             | TRA            |
| 275/70R22.5 | 16         | 148/145    | M             | 8.25         | 2900                           | 900 | 3150   | 900 | 958                   | 276                | 14.5             | ETRTO          |
| 275/70R22.5 | 18         | 150/148    | M             | 8.25         | 3150                           | 900 | 3350   | 900 | 958                   | 276                | 14.5             | ETRTO          |



# LLF26

RADIAL TRUCK TIRE

Suitable for all position axle of medium trucks.

| Size    | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|---------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|         |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|         |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 7.50R20 | 12         | 128/126    | L             | 6.0          | 1700                           | 760 | 1800   | 760 | 935                   | 215                | 11.5             | GB             |
| 7.50R20 | 14         | 130/128    | K             | 6.0          | 1800                           | 830 | 1900   | 830 | 935                   | 215                | 11.5             | GB             |
| 8.25R20 | 12         | 133/131    | L             | 6.5          | 1950                           | 720 | 2060   | 720 | 974                   | 236                | 12.5             | GB             |
| 8.25R20 | 14         | 136/134    | L             | 6.5          | 2120                           | 830 | 2240   | 830 | 974                   | 236                | 12.5             | GB             |
| 8.25R20 | 16         | 139/137    | L             | 6.5          | 2300                           | 930 | 2430   | 930 | 974                   | 236                | 12.5             | GB             |



# T820

RADIAL TRUCK TIRE

Suitable for all position axle of trucks running on the high-grade road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 305/70R19.5 | 18         | 148/145    | M             | 9.00(8.25)   | 2900                           | 850 | 3150   | 850 | 923                   | 305                | 12.0             | ETRTO          |



# LLF76

RADIAL TRUCK TIRE

Suitable for all position axle of buses and medium trucks.

| Size   | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|--------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|        |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|        |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 8R22.5 | 12         | 128/126    | M             | 6.00         | 1700                           | 760 | 1800   | 760 | 935                   | 203                | 13.0             | GB             |
| 8R22.5 | 14         | 130/128    | M             | 6.00         | 1800                           | 830 | 1900   | 830 | 935                   | 203                | 13.0             | GB             |



# LLF56+

RADIAL TRUCK TIRE

Suitable for all position axle of buses and trucks.

| Size    | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|---------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|         |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|         |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 9R22.5  | 12         | 133/131    | M             | 6.75         | 1950                           | 720 | 2060   | 720 | 974                   | 229                | 13.5             | TRA            |
| 9R22.5  | 14         | 136/134    | M             | 6.75         | 2120                           | 830 | 2240   | 830 | 974                   | 229                | 13.5             | TRA            |
| 10R22.5 | 14         | 141/139    | M             | 7.50         | 2430                           | 790 | 2575   | 790 | 1019                  | 254                | 14.0             | TRA            |
| 10R22.5 | 14         | 144/142    | L             | 7.50         | 2650                           | 850 | 2800   | 850 | 1019                  | 254                | 14.0             | ETRTO          |
| 10R22.5 | 16         | 144/142    | L             | 7.50         | 2650                           | 900 | 2800   | 900 | 1019                  | 254                | 14.0             | GB             |



# LAL800

RADIAL TRUCK TIRE

Suitable for all position axle of trucks running on the multi road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 8.25R20     | 12         | 133/131    | L             | 6.5          | 1950                           | 720 | 2060   | 720 | 974                   | 236                | 12.0             | GB             |
| 8.25R20     | 14         | 136/134    | L             | 6.5          | 2120                           | 830 | 2240   | 830 | 974                   | 236                | 12.0             | GB             |
| 8.25R20     | 16         | 139/137    | L             | 6.5          | 2300                           | 930 | 2430   | 930 | 974                   | 236                | 12.0             | GB             |
| 11.00R20    | 16         | 150/147    | L             | 8.0          | 3075                           | 830 | 3350   | 830 | 1085                  | 293                | 16.0             | GB             |
| 11.00R20    | 18         | 152/149    | K             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 16.0             | GB             |
| 12.00R24    | 18         | 156/153    | K             | 8.5          | 3650                           | 775 | 4000   | 775 | 1226                  | 313                | 17.0             | ETRTO          |
| 12.00R24    | 20         | 160/156    | K             | 8.5          | 4000                           | 850 | 4500   | 850 | 1226                  | 313                | 17.0             | ETRTO          |
| 11R22.5     | 14         | 144/142    | L             | 8.25         | 2650                           | 720 | 2800   | 720 | 1054                  | 279                | 16.0             | TRA            |
| 11R22.5     | 16         | 146/143    | L             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 16.0             | TRA            |
| 11R22.5     | 16         | 148/145    | L             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 16.0             | ETRTO          |
| 12R22.5     | 16         | 152/148    | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 16.0             | ETRTO          |
| 12R22.5     | 18         | 152/149    | K             | 9.00         | 3250                           | 930 | 3550   | 930 | 1085                  | 300                | 16.0             | GB             |
| 315/80R22.5 | 18         | 154/150    | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 16.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | L             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 16.0             | ETRTO          |



# C600

RADIAL TRUCK TIRE

Suitable for all position axle of trucks running on the high-grade road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 9R22.5      | 14         | 136/134    | M             | 6.75         | 2120                           | 830 | 2240   | 830 | 974                   | 229                | 15               | TRA            |
| 10R22.5     | 14         | 144/142    | L             | 7.50         | 2650                           | 850 | 2800   | 850 | 1020                  | 254                | 15               | ETRTO          |
| 11R22.5     | 14         | 144/142    | M             | 8.25         | 2650                           | 720 | 2800   | 720 | 1054                  | 279                | 16               | TRA            |
| 11R22.5     | 16         | 146/143    | L             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 16               | TRA            |
| 11R22.5     | 16         | 148/145    | L             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 16               | ETRTO          |
| 12R22.5     | 16         | 152/148    | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 16               | ETRTO          |
| 295/80R22.5 | 16         | 152/148    | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 16               | ETRTO          |



# D900

RADIAL TRUCK TIRE (REGIONAL DRIVE)

- New technology for tire to reduce the weight.
- Low eccentric wear.
- Low fuel consumption.
- Good braking and grip on the road.

| Size     | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|          |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|          |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 10.00R20 | 16         | 146/143    | L             | 7.5          | 2725                           | 830 | 3000   | 830 | 1054                  | 278                | 17.5             | TRA            |
| 10.00R20 | 18         | 149/146    | K             | 7.5          | 3000                           | 930 | 3250   | 930 | 1054                  | 278                | 17.5             | GB             |



# LFL827

RADIAL TRUCK TIRE (REGIONAL STEER)

- New technology for tire to reduce the weight.
- Low eccentric wear.
- Low fuel consumption.
- Good handling.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 12R22.5     | 18         | 152/149    | L             | 9.00         | 3250                           | 930 | 3550   | 930 | 1085                  | 300                | 13.0             | GB             |
| 12R22.5     | 16         | 152/148    | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 13.0             | ETRTO          |
| 295/80R22.5 | 16         | 152/148    | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 14.0             | ETRTO          |
| 295/80R22.5 | 18         | 152/149    | M             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 14.0             | GB             |
| 315/80R22.5 | 18         | 154/150    | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 13.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | L             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 13.0             | ETRTO          |
| 385/65R22.5 | 18         | 158        | K             | 11.75        | —                              | —   | 4250   | 850 | 1072                  | 389                | 13.0             | ETRTO          |
| 385/65R22.5 | 20         | 160        | J             | 11.75        | —                              | —   | 4500   | 900 | 1072                  | 389                | 13.0             | ETRTO          |
| 385/65R22.5 | 24         | 164        | J             | 11.75        | —                              | —   | 5000   | 900 | 1072                  | 389                | 13.0             | ETRTO          |



# LLF02e+

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 315/80R22.5 | 18         | 154/151    | M             | 9.00         | 3450                           | 830 | 3750   | 830 | 1076                  | 312                | 14.5             | TRA            |
| 315/80R22.5 | 20         | 157/154    | L             | 9.00         | 3750                           | 900 | 4125   | 900 | 1076                  | 312                | 14.5             | TRA            |



# F816e+

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 14         | 144/142    | M             | 8.25         | 2650                           | 720 | 2800   | 720 | 1054                  | 279                | 14.5             | TRA            |
| 11R22.5     | 16         | 146/143    | M             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 14.5             | TRA            |
| 11R24.5     | 14         | 146/143    | M             | 8.25         | 2725                           | 720 | 3000   | 720 | 1104                  | 279                | 14.5             | TRA            |
| 11R24.5     | 16         | 149/146    | M             | 8.25         | 3000                           | 830 | 3250   | 830 | 1104                  | 279                | 14.5             | TRA            |
| 295/75R22.5 | 14         | 144/141    | M             | 9.00         | 2575                           | 760 | 2800   | 760 | 1014                  | 298                | 14.5             | TRA            |
| 295/75R22.5 | 16         | 146/143    | M             | 9.00         | 2725                           | 830 | 3000   | 830 | 1014                  | 298                | 14.5             | TRA            |
| 285/75R24.5 | 14         | 144/141    | M             | 8.25         | 2575                           | 760 | 2800   | 760 | 1050                  | 283                | 14.5             | TRA            |
| 285/75R24.5 | 16         | 147/144    | M             | 8.25         | 2800                           | 830 | 3075   | 830 | 1050                  | 283                | 14.5             | TRA            |



# LAL800e+

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

- Good handling.
- Low fuel consumption.
- Certified by U.S.A SmartWay.

| Size    | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|---------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|         |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|         |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5 | 14         | 144/142    | L             | 8.25         | 2650                           | 720 | 2800   | 720 | 1054                  | 279                | 16.0             | TRA            |
| 11R22.5 | 16         | 146/143    | L             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 16.0             | TRA            |



## T810e+

RADIAL TRUCK TIRE (REGIONAL TRAILER)

- Low fuel consumption.
- Certified by U.S.A SmartWay.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 14         | 144/142    | M             | 8.25         | 2650                           | 720 | 2800   | 720 | 1054                  | 279                | 10.0             | TRA            |
| 11R22.5     | 16         | 146/143    | M             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 10.0             | TRA            |
| 11R24.5     | 14         | 146/143    | M             | 8.25         | 2725                           | 720 | 3000   | 720 | 1104                  | 279                | 10.75            | TRA            |
| 11R24.5     | 16         | 149/146    | M             | 8.25         | 3000                           | 830 | 3250   | 830 | 1104                  | 279                | 10.75            | TRA            |
| 295/75R22.5 | 14         | 144/141    | M             | 9.00         | 2575                           | 760 | 2800   | 760 | 1014                  | 298                | 10.0             | TRA            |
| 295/75R22.5 | 16         | 146/143    | M             | 9.00         | 2725                           | 830 | 3000   | 830 | 1014                  | 298                | 10.0             | TRA            |



## KTT307

RADIAL TRUCK TIRE (REGIONAL TRAILER)

- Low fuel consumption
- HAT technology: low heat generation.
- Stone rejection design.
- New technology for tire to reduce the weight.

| Size    | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|---------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|         |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|         |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5 | 16         | 148/145    | L             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 14.0             | ETRTO          |



## LLA18e+

RADIAL TRUCK TIRE (REGIONAL TRAILER)

- Low fuel consumption.
- HAT technology: low heat generation

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 385/65R22.5 | 18         | 158        | K             | 11.75        | ---                            | --- | 4250   | 830 | 1072                  | 389                | 16.5             | TRA            |



# ON&OFF ROAD



## KMA403

RADIAL TRUCK TIRE (ON&OFF ROAD)

Suitable for all position axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- HAT technology: Low heat generation.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 9.00R20     | 14         | 141/139    | K             | 7.0          | 2430                           | 790 | 2575   | 790 | 1019                  | 259                | 14.5             | GB             |
| 9.00R20     | 16         | 144/142    | K             | 7.0          | 2650                           | 900 | 2800   | 900 | 1019                  | 259                | 14.5             | GB             |
| 10.00R20    | 16         | 146/143    | K             | 7.5          | 2725                           | 830 | 3000   | 830 | 1054                  | 278                | 14.5             | GB             |
| 10.00R20    | 18         | 149/146    | K             | 7.5          | 3000                           | 930 | 3250   | 930 | 1054                  | 278                | 14.5             | GB             |
| 11.00R20    | 16         | 150/147    | K             | 8.0          | 3075                           | 830 | 3350   | 830 | 1085                  | 293                | 15.5             | GB             |
| 11.00R20    | 18         | 152/149    | K             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 15.5             | GB             |
| 12.00R20    | 18         | 154/151    | K             | 8.5          | 3450                           | 830 | 3750   | 830 | 1125                  | 315                | 15.5             | GB             |
| 12.00R24    | 18         | 156/153    | K             | 8.5          | 3650                           | 775 | 4000   | 775 | 1226                  | 313                | 15.5             | ETRTO          |
| 12.00R24    | 20         | 160/156    | K             | 8.5          | 4000                           | 850 | 4500   | 850 | 1226                  | 313                | 15.5             | ETRTO          |
| 12R22.5     | 16         | 152/148    | K             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 15.5             | ETRTO          |
| 12R22.5     | 18         | 152/149    | K             | 9.00         | 3250                           | 930 | 3550   | 930 | 1085                  | 300                | 15.5             | GB             |
| 13R22.5     | 18         | 154/151    | K             | 9.75         | 3450                           | 830 | 3750   | 830 | 1124                  | 320                | 15.5             | GB             |
| 13R22.5     | 18         | 156/150    | K             | 9.75         | 3350                           | 875 | 4000   | 875 | 1124                  | 320                | 15.5             | ETRTO          |
| 295/80R22.5 | 16         | 152/148    | K             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 15.0             | ETRTO          |
| 295/80R22.5 | 18         | 152/149    | K             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 15.0             | GB             |
| 315/80R22.5 | 18         | 154/150    | L             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 15.5             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | K             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 15.5             | ETRTO          |
| 385/65R22.5 | 24         | 164        | G             | 11.75        | —                              | —   | 5000   | 900 | 1072                  | 389                | 16.0             | ETRTO          |
| 385/65R22.5 | 20         | 160        | K             | 11.75        | —                              | —   | 4500   | 900 | 1072                  | 389                | 16.0             | ETRTO          |
| 385/65R22.5 | 18         | 158        | K             | 11.75        | —                              | —   | 4250   | 850 | 1072                  | 389                | 16.0             | ETRTO          |





# KMD403

RADIAL TRUCK TIRE (ON&OFF ROAD)

Suitable for drive axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- HAT technology: Low heat generation.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11.00R20    | 16         | 150/147    | K             | 8.0          | 3075                           | 830 | 3350   | 830 | 1085                  | 293                | 19.0             | GB             |
| 11.00R20    | 18         | 152/149    | K             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 19.0             | GB             |
| 12.00R20    | 18         | 154/151    | K             | 8.5          | 3450                           | 830 | 3750   | 830 | 1125                  | 315                | 20.0             | GB             |
| 12.00R24    | 18         | 156/153    | K             | 8.5          | 3650                           | 775 | 4000   | 775 | 1226                  | 313                | 19.0             | ETRTO          |
| 12.00R24    | 20         | 160/156    | K             | 8.5          | 4000                           | 850 | 4500   | 850 | 1226                  | 313                | 19.0             | ETRTO          |
| 12R22.5     | 16         | 152/148    | K             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 19.0             | ETRTO          |
| 12R22.5     | 18         | 152/149    | K             | 9.00         | 3250                           | 930 | 3550   | 930 | 1085                  | 300                | 19.0             | GB             |
| 13R22.5     | 18         | 154/151    | K             | 9.75         | 3450                           | 830 | 3750   | 830 | 1124                  | 320                | 19.0             | GB             |
| 13R22.5     | 18         | 156/150    | K             | 9.75         | 3350                           | 875 | 4000   | 875 | 1124                  | 320                | 19.0             | ETRTO          |
| 295/80R22.5 | 16         | 152/148    | K             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 18.5             | ETRTO          |
| 295/80R22.5 | 18         | 152/149    | K             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 18.5             | GB             |
| 315/80R22.5 | 18         | 154/150    | L             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 19.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | K             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 19.0             | ETRTO          |



# KMD406

RADIAL TRUCK TIRE (ON&OFF ROAD)

Suitable for drive axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S and 3PMSF marking.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 13R22.5     | 18         | 156/150    | K             | 9.75         | 3350                           | 875 | 4000   | 875 | 1124                  | 320                | 21.0             | ETRTO          |
| 315/80R22.5 | 18         | 154/150    | K             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 21.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | K             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 21.0             | ETRTO          |



# KMA400

RADIAL TRUCK TIRE (ON&OFF ROAD)

Suitable for all position axle of trucks under all kinds of working conditions.

- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S and 3PMSF marking.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 8.25R20     | 14         | 136/134    | K             | 6.5          | 2120                           | 830 | 2240   | 830 | 974                   | 236                | 15.5             | GB             |
| 8.25R20     | 16         | 139/137    | K             | 6.5          | 2300                           | 930 | 2430   | 930 | 974                   | 236                | 15.5             | GB             |
| 9.00R20     | 16         | 144/142    | K             | 7.0          | 2650                           | 900 | 2800   | 900 | 1019                  | 259                | 16               | GB             |
| 10.00R20    | 18         | 149/146    | K             | 7.5          | 3000                           | 930 | 3250   | 930 | 1054                  | 278                | 16               | GB             |
| 11.00R20    | 18         | 152/149    | K             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 16.5             | GB             |
| 11.00R20    | 16         | 150/147    | K             | 8.0          | 3075                           | 830 | 6650   | 830 | 1085                  | 293                | 16.5             | GB             |
| 12.00R20    | 18         | 154/151    | K             | 8.5          | 3450                           | 830 | 3750   | 830 | 1125                  | 315                | 17.0             | GB             |
| 12.00R20    | 20         | 156/153    | K             | 8.5          | 3650                           | 900 | 4000   | 900 | 1125                  | 315                | 17.0             | GB             |
| 12R22.5     | 16         | 152/148    | K             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 17.0             | ETRTO          |
| 12R22.5     | 18         | 152/149    | K             | 9.00         | 3250                           | 930 | 3550   | 930 | 1085                  | 300                | 17.0             | GB             |
| 13R22.5     | 18         | 156/150    | K             | 9.75         | 3350                           | 875 | 4000   | 875 | 1124                  | 320                | 19.0             | ETRTO          |
| 13R22.5     | 20         | 158/156    | K             | 9.75         | 4000                           | 900 | 4250   | 900 | 1124                  | 320                | 19.0             | ETRTO          |
| 295/80R22.5 | 16         | 152/148    | K             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 19.0             | ETRTO          |
| 295/80R22.5 | 18         | 152/149    | K             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 19.0             | GB             |
| 295/80R22.5 | 18         | 154/149    | K             | 9.00         | 3250                           | 850 | 3750   | 850 | 1044                  | 298                | 19.0             | ETRTO          |
| 315/80R22.5 | 18         | 154/150    | K             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 19.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | K             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 19.0             | ETRTO          |
| 315/80R22.5 | 22         | 158/150    | K             | 9.00         | 3350                           | 900 | 4250   | 900 | 1076                  | 312                | 19.0             | ETRTO          |
| 425/65R22.5 | 20         | 165        | K             | 13.0         | ---                            | --- | 5150   | 825 | 1124                  | 430                | 18.5             | ETRTO          |
| 445/65R22.5 | 20         | 169        | J/K           | 14.0         | ---                            | --- | 5800   | 900 | 1150                  | 454                | 18.5             | ETRTO          |



## KMD402

RADIAL TRUCK TIRE (ON&OFF ROAD)

- Suitable for drive axle of trucks under all kinds of working conditions.
- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 10.00R20    | 18         | 149/146    | K             | 7.5          | 3000                           | 930 | 3250   | 930 | 1054                  | 278                | 20.0             | GB             |
| 315/80R22.5 | 18         | 154/150    | K             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 22.5             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | K             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 22.5             | ETRTO          |



## KMA40

RADIAL TRUCK TIRE (ON&OFF ROAD)

- Suitable for all position axle of trucks under all kinds of working conditions.
- Chip, cut and abrasion resistance tread compound.
- Stone rejection design protects groove bottom from stone puncture.
- Deep tread depth increases mileage and service life.

| Size    | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|---------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|         |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|         |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5 | 16         | 146/143    | L             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 18.3             | TRA            |
| 11R24.5 | 16         | 149/146    | L             | 8.25         | 3000                           | 830 | 3250   | 830 | 1104                  | 279                | 18.3             | TRA            |



## KXA400

RADIAL TRUCK TIRE (ON&OFF ROAD)

- Suitable for trailer and steer axle of trucks under all kinds of working conditions.
- Thick sidewall design protects against sidewall impacts and bruises.
- Stone rejection design protects groove bottom from stone puncture.
- Lasting grip and stability with M+S and 3PMSF marking.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 385/65R22.5 | 18         | 158        | L             | 11.75        | ---                            | --- | 4250   | 850 | 1072                  | 389                | 18.0             | ETRTO          |
| 385/65R22.5 | 20         | 160(158)   | K(L)          | 11.75        | ---                            | --- | 4500   | 900 | 1072                  | 389                | 18.0             | ETRTO          |
| 385/65R22.5 | 24         | 164        | J             | 11.75        | ---                            | --- | 5000   | 900 | 1072                  | 389                | 18.0             | ETRTO          |
| 425/65R22.5 | 20         | 165        | K             | 12.25        | ---                            | --- | 5150   | 825 | 1124                  | 422                | 18.5             | ETRTO          |



## KMD401

RADIAL TRUCK TIRE (ON&OFF ROAD)

- Suitable for drive axle of trucks under all kinds of working conditions.
- Chip, cut and abrasion resistance tread compound.
- Stone rejection design protects groove bottom from stone puncture.
- Deep tread depth increases mileage and service life.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 16         | 146/143    | L             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 20.5             | TRA            |
| 11R22.5     | 16         | 148/145    | L             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 20.5             | ETTRO          |
| 11R24.5     | 16         | 149/146    | L             | 8.25         | 3000                           | 830 | 3250   | 830 | 1104                  | 279                | 22.5             | TRA            |
| 295/80R22.5 | 16         | 152/148    | L             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 20.5             | ETTRO          |
| 295/80R22.5 | 18         | 152/149    | L             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 20.5             | GB             |



# LAR919

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Pattern block design reduces shoulder heat.
- Wide running surface and higher saturation design improves the wear mileage.
- Powerful traction, grip and climbing performance.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 7.50R20     | 12         | 128/126    | L             | 6.0          | 1700                           | 760 | 1800   | 760 | 935                   | 215                | 14.5             | GB             |
| 7.50R20     | 14         | 130/128    | K             | 6.0          | 1800                           | 830 | 1900   | 830 | 935                   | 215                | 14.5             | GB             |
| 8.25R20     | 14         | 136/134    | K             | 6.5          | 2120                           | 830 | 2240   | 830 | 974                   | 236                | 15.5             | GB             |
| 8.25R20     | 16         | 139/137    | K             | 6.5          | 2300                           | 930 | 2430   | 930 | 974                   | 236                | 15.5             | GB             |
| 9.00R20     | 16         | 144/142    | K             | 7.0          | 2650                           | 900 | 2800   | 900 | 1019                  | 259                | 16.0             | GB             |
| 10.00R20    | 18         | 149/146    | K             | 7.5          | 3000                           | 930 | 3250   | 930 | 1054                  | 278                | 16.0             | GB             |
| 11.00R20    | 18         | 152/149    | K             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 16.0             | GB             |
| 12.00R20    | 18         | 154/151    | K             | 8.5          | 3450                           | 830 | 3750   | 830 | 1125                  | 315                | 16.0             | GB             |
| 12.00R20    | 20         | 156/153    | K             | 8.5          | 3650                           | 900 | 4000   | 900 | 1125                  | 315                | 16.0             | GB             |
| 11R22.5     | 16         | 146/143    | K             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 19.0             | TRA            |
| 11R22.5     | 16         | 148/145    | K             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 19.0             | ETRTO          |
| 295/80R22.5 | 16         | 152/148    | K             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 18.0             | ETRTO          |
| 295/80R22.5 | 18         | 152/149    | K             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 18.0             | GB             |
| 295/80R22.5 | 18         | 154/149    | K             | 9.00         | 3250                           | 850 | 3750   | 850 | 1044                  | 298                | 18.0             | ETRTO          |
| 315/80R22.5 | 18         | 154/150    | K             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 20.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | K             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 20.0             | ETRTO          |
| 315/80R22.5 | 22         | 158/150    | K             | 9.00         | 3350                           | 900 | 4250   | 900 | 1076                  | 312                | 20.0             | ETRTO          |
| 325/95R24   | 22         | 162/160    | K             | 9.00         | 4500                           | 850 | 4750   | 850 | 1228                  | 325                | 18.0             | ETRTO          |
| 12R24.5     | 16         | 152/149    | K             | 9.00         | 3250                           | 830 | 3550   | 830 | 1135                  | 300                | 16.0             | TRA            |
| 12R24.5     | 18         | 154/151    | K             | 9.00         | 3450                           | 930 | 3750   | 930 | 1135                  | 300                | 16.0             | GB             |



# LAR959

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Wide and deep tread grooves for long tire life.
- Excellent cutting and chipping resistance.
- Robust tread and high traction on rough surfaces.

| Size      | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|           |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|           |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 8.25R20   | 16         | 139/137    | F             | 6.5          | 2300                           | 930 | 2430   | 930 | 974                   | 236                | 18.0             | GB             |
| 9.00R20   | 16         | 144/142    | D             | 7.0          | 2650                           | 900 | 2800   | 900 | 1019                  | 259                | 20.0             | GB             |
| 10.00R20  | 18         | 149/146    | K             | 7.5          | 3000                           | 930 | 3250   | 930 | 1054                  | 278                | 18.0             | GB             |
| 11.00R20  | 18         | 152/149    | K             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 18.0             | GB             |
| 12.00R20  | 18         | 154/151    | K             | 8.5          | 3450                           | 830 | 3750   | 830 | 1125                  | 315                | 19.0             | GB             |
| 12.00R20  | 20         | 156/153    | K             | 8.5          | 3650                           | 900 | 4000   | 900 | 1125                  | 315                | 19.0             | GB             |
| 325/95R24 | 22         | 162/160    | K             | 9.00         | 4500                           | 850 | 4750   | 850 | 1228                  | 325                | 23.0             | ETRTO          |



# LDR978

RADIAL TRUCK TIRE (ON&OFF ROAD DRIVE)

- Good traction.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

| Size        | Ply Rating | Load Index       | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |                  |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |                  |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 10.00R20    | 18         | 149/146          | K             | 7.5          | 3000                           | 930 | 3250   | 930 | 1054                  | 278                | 16.0             | GB             |
| 11.00R20    | 18         | 152/149          | K             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 16.0             | GB             |
| 12.00R20    | 18         | 154/151          | K             | 8.5          | 3450                           | 830 | 3750   | 830 | 1125                  | 315                | 16.0             | GB             |
| 12.00R20    | 20         | 156/153          | K             | 8.5          | 3650                           | 900 | 4000   | 900 | 1125                  | 315                | 16.0             | GB             |
| 12R22.5     | 16         | 152/148          | K             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 20.5             | ETRTO          |
| 12R22.5     | 18         | 152/149          | K             | 9.00         | 3250                           | 930 | 3550   | 930 | 1085                  | 300                | 20.5             | GB             |
| 13R22.5     | 18         | 156/150          | K             | 9.75         | 3350                           | 875 | 4000   | 875 | 1124                  | 320                | 21.0             | ETRTO          |
| 315/80R22.5 | 18         | 154/150          | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 21.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150(154/150) | L(M)          | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 21.0             | ETRTO          |



# LLA08

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 7.50R20     | 12         | 128/126    | L             | 6.0          | 1700                           | 760 | 1800   | 760 | 935                   | 215                | 13.5             | GB             |
| 7.50R20     | 14         | 130/128    | K             | 6.0          | 1800                           | 830 | 1900   | 830 | 935                   | 215                | 13.5             | GB             |
| 8.25R20     | 12         | 133/131    | L             | 6.5          | 1950                           | 720 | 2060   | 720 | 974                   | 236                | 15.5             | GB             |
| 8.25R20     | 14         | 136/134    | L             | 6.5          | 2120                           | 830 | 2240   | 830 | 974                   | 236                | 15.5             | GB             |
| 8.25R20     | 16         | 139/137    | L             | 6.5          | 2300                           | 930 | 2430   | 930 | 974                   | 236                | 15.5             | GB             |
| 9.00R20     | 14         | 141/139    | K             | 7.0          | 2430                           | 790 | 2575   | 790 | 1019                  | 259                | 15.0             | TRA            |
| 9.00R20     | 16         | 144/142    | K             | 7.0          | 2650                           | 900 | 2800   | 900 | 1019                  | 259                | 15.0             | GB             |
| 10.00R20    | 16         | 146/143    | K             | 7.5          | 2725                           | 830 | 3000   | 830 | 1054                  | 278                | 15.5             | TRA            |
| 10.00R20    | 18         | 149/146    | K             | 7.5          | 3000                           | 930 | 3250   | 930 | 1054                  | 278                | 15.5             | GB             |
| 11.00R20    | 16         | 150/147    | K             | 8.0          | 3075                           | 830 | 3350   | 830 | 1085                  | 293                | 16.5             | GB             |
| 11.00R20    | 18         | 152/149    | K             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 16.5             | GB             |
| 12.00R20    | 18         | 154/151    | K             | 8.5          | 3450                           | 830 | 3750   | 830 | 1125                  | 315                | 17.0             | TRA            |
| 12.00R24    | 18         | 156/153    | K             | 8.5          | 3650                           | 775 | 4000   | 775 | 1226                  | 313                | 17.0             | ETRTO          |
| 12.00R24    | 20         | 160/156    | K             | 8.5          | 4000                           | 850 | 4500   | 850 | 1226                  | 313                | 17.0             | ETRTO          |
| 11R22.5     | 14         | 144/142    | K             | 8.25         | 2650                           | 720 | 2800   | 720 | 1054                  | 279                | 15.0             | TRA            |
| 11R22.5     | 16         | 146/143    | K             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 15.0             | TRA            |
| 11R22.5     | 16         | 148/145    | K             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 15.0             | ETRTO          |
| 12R22.5     | 16         | 152/148    | K             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 17.0             | ETRTO          |
| 11R24.5     | 14         | 146/143    | K             | 8.25         | 2725                           | 720 | 3000   | 720 | 1104                  | 279                | 15.5             | TRA            |
| 11R24.5     | 16         | 149/146    | K             | 8.25         | 3000                           | 830 | 3250   | 830 | 1104                  | 279                | 15.5             | TRA            |
| 12R24.5     | 16         | 152/149    | K             | 9.00         | 3250                           | 830 | 3550   | 830 | 1135                  | 300                | 16.0             | TRA            |
| 12R24.5     | 18         | 154/151    | K             | 9.00         | 3450                           | 930 | 3750   | 930 | 1135                  | 300                | 16.0             | GB             |
| 255/70R22.5 | 16         | 140/137    | M             | 7.50         | 2300                           | 830 | 2500   | 830 | 930                   | 255                | 12.7             | TRA            |
| 295/80R22.5 | 16         | 152/148    | K             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 16.0             | ETRTO          |
| 295/80R22.5 | 18         | 154/149    | K             | 9.00         | 3250                           | 850 | 3750   | 850 | 1044                  | 298                | 16.0             | ETRTO          |
| 315/80R22.5 | 18         | 154/150    | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 17.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | L             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 17.0             | ETRTO          |
| 315/80R22.5 | 22         | 158/150    | K             | 9.00         | 3350                           | 900 | 4250   | 900 | 1076                  | 312                | 17.0             | ETRTO          |



# LLA01

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

| Size     | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|          |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|          |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 9.00R20  | 14         | 141/139    | K             | 7.0          | 2430                           | 790 | 2575   | 790 | 1019                  | 259                | 15.5             | TRA            |
| 9.00R20  | 16         | 144/142    | K             | 7.0          | 2650                           | 900 | 2800   | 900 | 1019                  | 259                | 15.5             | GB             |
| 10.00R20 | 16         | 146/143    | K             | 7.5          | 2725                           | 830 | 3000   | 830 | 1054                  | 278                | 17.5             | TRA            |
| 10.00R20 | 18         | 149/146    | K             | 7.5          | 3000                           | 930 | 3250   | 930 | 1054                  | 278                | 17.5             | GB             |
| 11.00R20 | 16         | 150/147    | K             | 8.0          | 3075                           | 830 | 3350   | 830 | 1085                  | 293                | 17.5             | GB             |
| 11.00R20 | 18         | 152/149    | K             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 17.5             | GB             |
| 13R22.5  | 18         | 156/150    | K             | 9.75         | 3350                           | 875 | 4000   | 875 | 1124                  | 320                | 17.5             | ETRTO          |
| 13R22.5  | 20         | 158/156    | K             | 9.75         | 4000                           | 900 | 4250   | 900 | 1124                  | 320                | 17.5             | ETRTO          |



# LLA58

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

| Size     | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|          |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|          |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11.00R20 | 16         | 150/147    | K             | 8.0          | 3075                           | 830 | 3350   | 830 | 1085                  | 293                | 14.5             | GB             |
| 11.00R20 | 18         | 152/149    | K             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 14.5             | GB             |
| 12.00R24 | 18         | 156/153    | K             | 8.5          | 3650                           | 775 | 4000   | 775 | 1226                  | 313                | 15.5             | ETRTO          |
| 12.00R24 | 20         | 160/156    | K             | 8.5          | 4000                           | 850 | 4500   | 850 | 1226                  | 313                | 15.5             | ETRTO          |



# LLD09

RADIAL TRUCK TIRE (ON&OFF ROAD DRIVE)

- Rigid block design for good traction.
- Cut resistance compound.

| Size     | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|          |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|          |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 8.25R20  | 12         | 133/131    | L             | 6.5          | 1950                           | 720 | 2060   | 720 | 974                   | 236                | 14.5             | GB             |
| 8.25R20  | 14         | 136/134    | L             | 6.5          | 2120                           | 830 | 2240   | 830 | 974                   | 236                | 14.5             | GB             |
| 8.25R20  | 16         | 139/137    | L             | 6.5          | 2300                           | 930 | 2430   | 930 | 974                   | 236                | 14.5             | GB             |
| 9.00R20  | 14         | 141/139    | K             | 7.0          | 2430                           | 790 | 2575   | 790 | 1019                  | 259                | 15.5             | TRA            |
| 9.00R20  | 16         | 144/142    | K             | 7.0          | 2650                           | 900 | 2800   | 900 | 1019                  | 259                | 15.5             | GB             |
| 10.00R20 | 16         | 146/143    | K             | 7.5          | 2725                           | 830 | 3000   | 830 | 1054                  | 278                | 16.0             | TRA            |
| 10.00R20 | 18         | 149/146    | K             | 7.5          | 3000                           | 930 | 3250   | 930 | 1054                  | 278                | 16.0             | GB             |
| 11.00R20 | 16         | 150/147    | K             | 8.0          | 3075                           | 830 | 3350   | 830 | 1085                  | 293                | 17.0             | GB             |
| 11.00R20 | 18         | 152/149    | K             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 17.0             | GB             |



# LLA38

RADIAL TRUCK TIRE (ON&OFF ROAD TRAILER)

- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 385/55R22.5 | 18         | 158        | L             | 12.25        | ---                            | --- | 4250   | 850 | 996                   | 386                | 16.5             | ETRTO          |
| 385/55R22.5 | 20         | 160        | J             | 12.25        | ---                            | --- | 4500   | 900 | 996                   | 386                | 16.5             | ETRTO          |
| 385/65R22.5 | 18         | 158        | K             | 11.75        | ---                            | --- | 4250   | 850 | 1072                  | 389                | 16.5             | ETRTO          |
| 385/65R22.5 | 20         | 160        | J             | 11.75        | ---                            | --- | 4500   | 900 | 1072                  | 389                | 16.5             | ETRTO          |
| 425/65R22.5 | 18         | 162        | K             | 12.25        | ---                            | --- | 4750   | 760 | 1124                  | 422                | 17.5             | TRA            |
| 425/65R22.5 | 20         | 165        | J/K           | 12.25        | ---                            | --- | 5150   | 825 | 1124                  | 422                | 17.5             | ETRTO          |
| 445/65R22.5 | 20         | 168        | J/K           | 13.00        | ---                            | --- | 5600   | 830 | 1150                  | 444                | 18.0             | TRA            |
| 445/65R22.5 | 20         | 169        | J             | 13.00        | ---                            | --- | 5800   | 900 | 1150                  | 444                | 18.0             | ETRTO          |



# D960

RADIAL TRUCK TIRE (ON&OFF ROAD DRIVE)

- TDeep and rigid block design for long life and good traction.
- Cut resistance compound.

| Size        | Ply Rating | Load Index       | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |                  |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |                  |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11.00R20    | 16         | 150/147          | K             | 8.0          | 3075                           | 830 | 3350   | 830 | 1085                  | 293                | 21.0             | GB             |
| 11.00R20    | 18         | 152/149          | K             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 21.0             | GB             |
| 12.00R20    | 18         | 154/151          | K             | 8.5          | 3450                           | 830 | 3750   | 830 | 1125                  | 315                | 21.0             | TRA            |
| 12.00R24    | 18         | 156/153          | K             | 8.5          | 3650                           | 775 | 4000   | 775 | 1226                  | 313                | 21.0             | ETRTO          |
| 12.00R24    | 20         | 160/156          | K             | 8.5          | 4000                           | 850 | 4500   | 850 | 1226                  | 313                | 21.0             | ETRTO          |
| 12R22.5     | 16         | 152/148          | K             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 21.0             | ETRTO          |
| 12R22.5     | 18         | 152/149          | J             | 9.00         | 3250                           | 930 | 3550   | 930 | 1085                  | 300                | 21.0             | GB             |
| 13R22.5     | 18         | 156/150          | K             | 9.75         | 3350                           | 875 | 4000   | 875 | 1124                  | 320                | 21.0             | ETRTO          |
| 9.5R17.5    | 14         | 129/127          | K             | 6.75         | 1750                           | 750 | 1850   | 750 | 842                   | 240                | 16.0             | ETRTO          |
| 9.5R17.5    | 18         | 143/141          | K             | 6.75         | 2575                           | 875 | 2725   | 875 | 842                   | 240                | 16.0             | ETRTO          |
| 265/70R19.5 | 16         | 140/138          | K             | 7.50         | 2360                           | 775 | 2500   | 775 | 867                   | 262                | 15.5             | ETRTO          |
| 265/70R19.5 | 18         | 143/141          | K             | 7.50         | 2575                           | 850 | 2725   | 850 | 867                   | 262                | 15.5             | ETRTO          |
| 275/70R22.5 | 16         | 148/145          | K             | 8.25         | 2900                           | 900 | 3150   | 900 | 958                   | 276                | 21.0             | ETRTO          |
| 295/80R22.5 | 16         | 152/148          | K             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 22.0             | ETRTO          |
| 295/80R22.5 | 18         | 152/149          | K             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 22.0             | GB             |
| 315/80R22.5 | 18         | 154/150          | M             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 21.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150(154/150) | L(M)          | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 21.0             | ETRTO          |



# LLA08e+

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Typical combined pattern.
- Cut resistance compound.
- Good braking and grip.
- Certified by U.S.A SmartWay.

| Size    | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|---------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|         |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|         |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5 | 16         | 146/143    | K             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 15.0             | TRA            |



## A968

RADIAL TRUCK TIRE (ON&OFF ROAD TRAILER)

- Cut resistance compound.
- Good braking and grip.

| Size       | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|            |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|            |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 10.00R15TR | 12         | 133/131    | M             | 7.50         | 1950                           | 620 | 2060   | 620 | 927                   | 278                | 17.5             | TRA            |
| 10.00R15TR | 14         | 137/135    | L             | 7.50         | 2180                           | 720 | 2300   | 720 | 927                   | 278                | 17.5             | TRA            |
| 10.00R15TR | 16         | 141/139    | K             | 7.50         | 2430                           | 830 | 2575   | 830 | 927                   | 278                | 17.5             | TRA            |
| 11R17.5    | 12         | 133/131    | M             | 8.25         | 1950                           | 620 | 2060   | 620 | 927                   | 279                | 17.5             | TRA            |
| 11R17.5    | 14         | 137/135    | L             | 8.25         | 2180                           | 720 | 2300   | 720 | 927                   | 279                | 17.5             | TRA            |
| 11R17.5    | 16         | 141/139    | K             | 8.25         | 2430                           | 830 | 2575   | 830 | 927                   | 279                | 17.5             | TRA            |
| 11R22.5    | 14         | 144/142    | L             | 8.25         | 2650                           | 720 | 2800   | 720 | 1054                  | 279                | 17.5             | TRA            |
| 11R22.5    | 16         | 146/143    | K             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 17.5             | TRA            |
| 11R22.5    | 16         | 148/145    | K             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 17.5             | ETRTO          |
| 11R24.5    | 14         | 146/143    | L             | 8.25         | 2725                           | 720 | 3000   | 720 | 1104                  | 279                | 17.5             | TRA            |
| 11R24.5    | 16         | 149/146    | K             | 8.25         | 3000                           | 830 | 3250   | 830 | 1104                  | 279                | 17.5             | TRA            |



## LTR968\*

RADIAL TRUCK TIRE (ON&OFF ROAD TRAILER)

- Cut resistance compound.
- Good braking and grip.

| Size         | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|--------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|              |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|              |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 275/70R22.5* | 16         | 148/145    | K             | 8.25         | 2900                           | 900 | 3150   | 900 | 958                   | 276                | 17.0             | ETRTO          |

# OFF ROAD





# LD0986

RADIAL TRUCK TIRE(OFF ROAD DRIVE)

- Suitable for hilly area and mine etc.,off road conditions.
- Off-road pattern block ensures powerful traction and good self-cleaning ability.
  - Chip,cut and abrasion resistance tread compound.
  - Deep tread depth increases mileage and service life.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 12.00R20    | 18         | 154/151    | F             | 8.5          | 3450                           | 830 | 3750   | 830 | 1136                  | 315                | 24.5             | GB             |
| 12.00R20    | 20         | 156/153    | F             | 8.5          | 3650                           | 900 | 4000   | 900 | 1136                  | 315                | 24.5             | GB             |
| 12.00R24    | 20         | 160/156    | F             | 8.5          | 4000                           | 850 | 4500   | 850 | 1226                  | 313                | 25.5             | ETRTO          |
| 12.00R24    | 18         | 156/153    | F             | 8.5          | 3650                           | 775 | 4000   | 775 | 1226                  | 313                | 25.5             | ETRTO          |
| 12.00R24    | 20         | 160/157    | F             | 8.5          | 4125                           | 900 | 4500   | 900 | 1226                  | 315                | 25.5             | GB             |
| 12.00R24    | 18         | 158/155    | F             | 8.5          | 3875                           | 830 | 4250   | 830 | 1226                  | 315                | 25.5             | GB             |
| 11R22.5     | 14         | 144/142    | F             | 8.25         | 2650                           | 720 | 2800   | 720 | 1065                  | 279                | 24.5             | TRA            |
| 11R22.5     | 16         | 146/143    | F             | 8.25         | 2725                           | 830 | 3000   | 830 | 1065                  | 279                | 24.5             | TRA            |
| 11R22.5     | 16         | 148/145    | F             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 24.5             | ETRTO          |
| 12R22.5     | 16         | 152/148    | F             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 24.5             | ETRTO          |
| 12R22.5     | 18         | 152/149    | F             | 9.00         | 3250                           | 930 | 3550   | 930 | 1096                  | 300                | 24.5             | GB             |
| 13R22.5     | 18         | 156/150    | F             | 9.75         | 3350                           | 875 | 4000   | 875 | 1124                  | 320                | 24.5             | ETRTO          |
| 11R24.5     | 14         | 146/143    | F             | 8.25         | 2725                           | 720 | 3000   | 720 | 1116                  | 279                | 24.5             | TRA            |
| 11R24.5     | 16         | 149/146    | F             | 8.25         | 3000                           | 830 | 3250   | 830 | 1116                  | 279                | 24.5             | TRA            |
| 295/80R22.5 | 16         | 152/148    | F             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 24.5             | ETRTO          |
| 295/80R22.5 | 18         | 152/149    | F             | 9.00         | 3250                           | 900 | 3550   | 900 | 1050                  | 298                | 24.5             | GB             |
| 315/80R22.5 | 18         | 154/150    | F             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 24.5             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | F             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 24.5             | ETRTO          |



# D960+

RADIAL TRUCK TIRE(OFF ROAD DRIVE)

- Suitable for hilly area and mine etc.,off road conditions.
- Off-road pattern block ensures powerful traction and good self-cleaning ability.
  - Chip,cut and abrasion resistance tread compound.
  - Deep tread depth increases mileage and service life.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 315/80R22.5 | 20         | 156/150    | F             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 24.9             | ETRTO          |



# LD0983

RADIAL TRUCK TIRE(OFF ROAD DRIVE)

- Suitable for hilly area and mine etc.,off road conditions.
- Off-road pattern block ensures powerful traction and good self-cleaning ability.
  - Chip,cut and abrasion resistance tread compound.
  - Deep tread depth increases mileage and service life.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 9.00R20     | 16         | 144/142    | F             | 7.0          | 2650                           | 900 | 2800   | 900 | 1030                  | 259                | 23.5             | GB             |
| 10.00R20    | 18         | 149/146    | F             | 7.5          | 3000                           | 930 | 3250   | 930 | 1065                  | 278                | 24.0             | GB             |
| 11.00R20    | 18         | 152/149    | F             | 8.0          | 3250                           | 930 | 3550   | 930 | 1096                  | 293                | 24.0             | GB             |
| 12.00R20    | 18         | 154/151    | F             | 8.5          | 3450                           | 830 | 3750   | 830 | 1136                  | 315                | 24.0             | GB             |
| 12.00R20    | 20         | 156/153    | F             | 8.5          | 3650                           | 900 | 4000   | 900 | 1136                  | 315                | 24.0             | GB             |
| 12.00R24    | 18         | 156/153    | F             | 8.5          | 3650                           | 775 | 4000   | 775 | 1226                  | 313                | 24.0             | ETRTO          |
| 12.00R24    | 20         | 160/156    | F             | 8.5          | 4000                           | 850 | 4500   | 850 | 1226                  | 313                | 24.0             | ETRTO          |
| 295/80R22.5 | 16         | 152/148    | F             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 22.0             | ETRTO          |
| 295/80R22.5 | 18         | 152/149    | F             | 9.00         | 3250                           | 900 | 3550   | 900 | 1050                  | 298                | 22.0             | GB             |



# LD0993

RADIAL TRUCK TIRE(OFF ROAD ALL POSITION)

- Suitable for mine,off road conditions
- Off-road pattern block ensures powerful traction and good self-cleaning ability.
  - Chip,cut and abrasion resistance tread compound.
  - Deep tread depth increases mileage and service life.

| Size     | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|          |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|          |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 9.00R20  | 16         | 144/142    | F             | 7.0          | 2650                           | 900 | 2800   | 900 | 1030                  | 259                | 24.5             | GB             |
| 10.00R20 | 18         | 149/146    | F             | 7.5          | 3000                           | 930 | 3250   | 930 | 1065                  | 278                | 24.5             | GB             |
| 11.00R20 | 18         | 152/149    | F             | 8.0          | 3250                           | 930 | 3550   | 930 | 1096                  | 293                | 24.5             | GB             |
| 12.00R20 | 18         | 154/151    | F             | 8.5          | 3450                           | 830 | 3750   | 830 | 1136                  | 315                | 24.5             | GB             |
| 12.00R20 | 20         | 156/153    | F             | 8.5          | 3650                           | 900 | 4000   | 900 | 1136                  | 315                | 24.5             | GB             |



# LD0912

RADIAL TRUCK TIRE(OFF ROAD DRIVE)

- Good traction resistance.
- Chip,cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11.00R20    | 18         | 152/149    | F             | 8.0          | 3250                           | 930 | 3550   | 930 | 1096                  | 293                | 22.0             | GB             |
| 11R22.5     | 16         | 148/145    | J             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 20.0             | ETRTO          |
| 275/80R22.5 | 16         | 149/146    | J             | 8.25         | 3000                           | 850 | 3250   | 850 | 1012                  | 276                | 20.0             | ETRTO          |
| 295/80R22.5 | 16         | 152/148    | F             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 20.0             | ETRTO          |



# D969

RADIAL TRUCK TIRE(OFF ROAD ALL POSITION)

- Good traction resistance.
- Chip,cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 8.25R20     | 12         | 133/131    | F             | 6.5          | 1950                           | 720 | 2060   | 720 | 986                   | 236                | 21.5             | GB             |
| 8.25R20     | 14         | 136/134    | F             | 6.5          | 2120                           | 830 | 2240   | 830 | 986                   | 236                | 21.5             | GB             |
| 8.25R20     | 16         | 139/137    | F             | 6.5          | 2300                           | 930 | 2430   | 930 | 986                   | 236                | 21.5             | GB             |
| 9.00R20     | 16         | 144/142    | F             | 7.0          | 2650                           | 900 | 2800   | 900 | 1030                  | 259                | 23.5             | GB             |
| 10.00R20    | 18         | 149/146    | J             | 7.5          | 3000                           | 930 | 3250   | 930 | 1065                  | 278                | 25.5             | GB             |
| 11.00R20    | 18         | 152/149    | F             | 8.0          | 3250                           | 930 | 3550   | 930 | 1096                  | 293                | 25.5             | GB             |
| 12.00R20    | 18         | 154/151    | F             | 8.5          | 3450                           | 830 | 3750   | 830 | 1136                  | 315                | 25.5             | TRA            |
| 12R22.5     | 18         | 152/149    | J             | 9.00         | 3250                           | 930 | 3550   | 930 | 1096                  | 300                | 25.5             | GB             |
| 295/80R22.5 | 16         | 152/148    | F             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 20.0             | ETRTO          |



# LLD10

RADIAL TRUCK TIRE(OFF ROAD DRIVE)

- Good traction resistance.
- Chip,cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

| Size     | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|          |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|          |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 9.00R20  | 14         | 141/139    | F             | 7.0          | 2430                           | 790 | 2575   | 790 | 1019                  | 259                | 20.0             | TRA            |
| 9.00R20  | 16         | 144/142    | F             | 7.0          | 2650                           | 900 | 2800   | 900 | 1019                  | 259                | 20.0             | GB             |
| 10.00R20 | 16         | 146/143    | J             | 7.5          | 2725                           | 830 | 3000   | 830 | 1054                  | 278                | 20.0             | TRA            |
| 10.00R20 | 18         | 149/146    | J             | 7.5          | 3000                           | 930 | 3250   | 930 | 1054                  | 278                | 20.0             | GB             |
| 11.00R20 | 16         | 150/147    | F             | 8.0          | 3075                           | 830 | 3350   | 830 | 1085                  | 293                | 20.0             | GB             |
| 11.00R20 | 18         | 152/149    | F             | 8.0          | 3250                           | 930 | 3550   | 930 | 1085                  | 293                | 20.0             | GB             |
| 12.00R20 | 18         | 154/151    | F             | 8.5          | 3450                           | 830 | 3750   | 830 | 1125                  | 315                | 21.0             | TRA            |
| 13R22.5  | 18         | 156/150    | F             | 9.75         | 3350                           | 875 | 4000   | 875 | 1124                  | 320                | 20.0             | ETRTO          |



# D990

RADIAL TRUCK TIRE (OFF ROAD ALL POSITION)

Suitable for off road conditions.

| Size     | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|          |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|          |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 14.00R20 | 18         | 160/157    | F             | 10.00W       | 4125                           | 700 | 4500   | 700 | 1238                  | 370                | 19.5             | ETRTO          |
| 14.00R20 | 20         | 164/160    | F             | 10.00W       | 4500                           | 750 | 5000   | 750 | 1238                  | 370                | 19.5             | ETRTO          |



## LDM991

RADIAL TRUCK TIRE (OFF ROAD ALL POSITION)

Suitable for off road conditions.

| Size     | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|          |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|          |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 14.00R20 | 18         | 160/157    | F             | 10.00W       | 4125                           | 700 | 4500   | 700 | 1238                  | 370                | 19.5             | ETRTO          |
| 14.00R20 | 20         | 164/160    | F             | 10.00W       | 4500                           | 750 | 5000   | 750 | 1238                  | 370                | 19.5             | ETRTO          |




## D950

RADIAL TRUCK TIRE (SHORT HAUL)

- Drive axle for on/off road conditions.
- Deep and rigid block design for good traction.
- Cut resistance compound.
- Used for logging conditions where high traction required.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 14         | 144/142    | K             | 8.25         | 2650                           | 720 | 2800   | 720 | 1065                  | 279                | 23.0             | TRA            |
| 11R22.5     | 16         | 146/143    | K             | 8.25         | 2725                           | 830 | 3000   | 830 | 1065                  | 279                | 23.0             | TRA            |
| 11R24.5     | 14         | 146/143    | F/G           | 8.25         | 2725                           | 720 | 3000   | 720 | 1116                  | 279                | 25.0             | TRA            |
| 11R24.5     | 16         | 149/146    | F/G           | 8.25         | 3000                           | 830 | 3250   | 830 | 1116                  | 279                | 25.0             | TRA            |
| 295/75R22.5 | 16         | 146/143    | J             | 9.00         | 2725                           | 830 | 3000   | 830 | 1026                  | 298                | 23.0             | TRA            |
| 285/75R24.5 | 16         | 147/144    | J             | 8.25         | 2800                           | 830 | 3075   | 830 | 1062                  | 283                | 23.0             | TRA            |

# LIGHT TRUCK

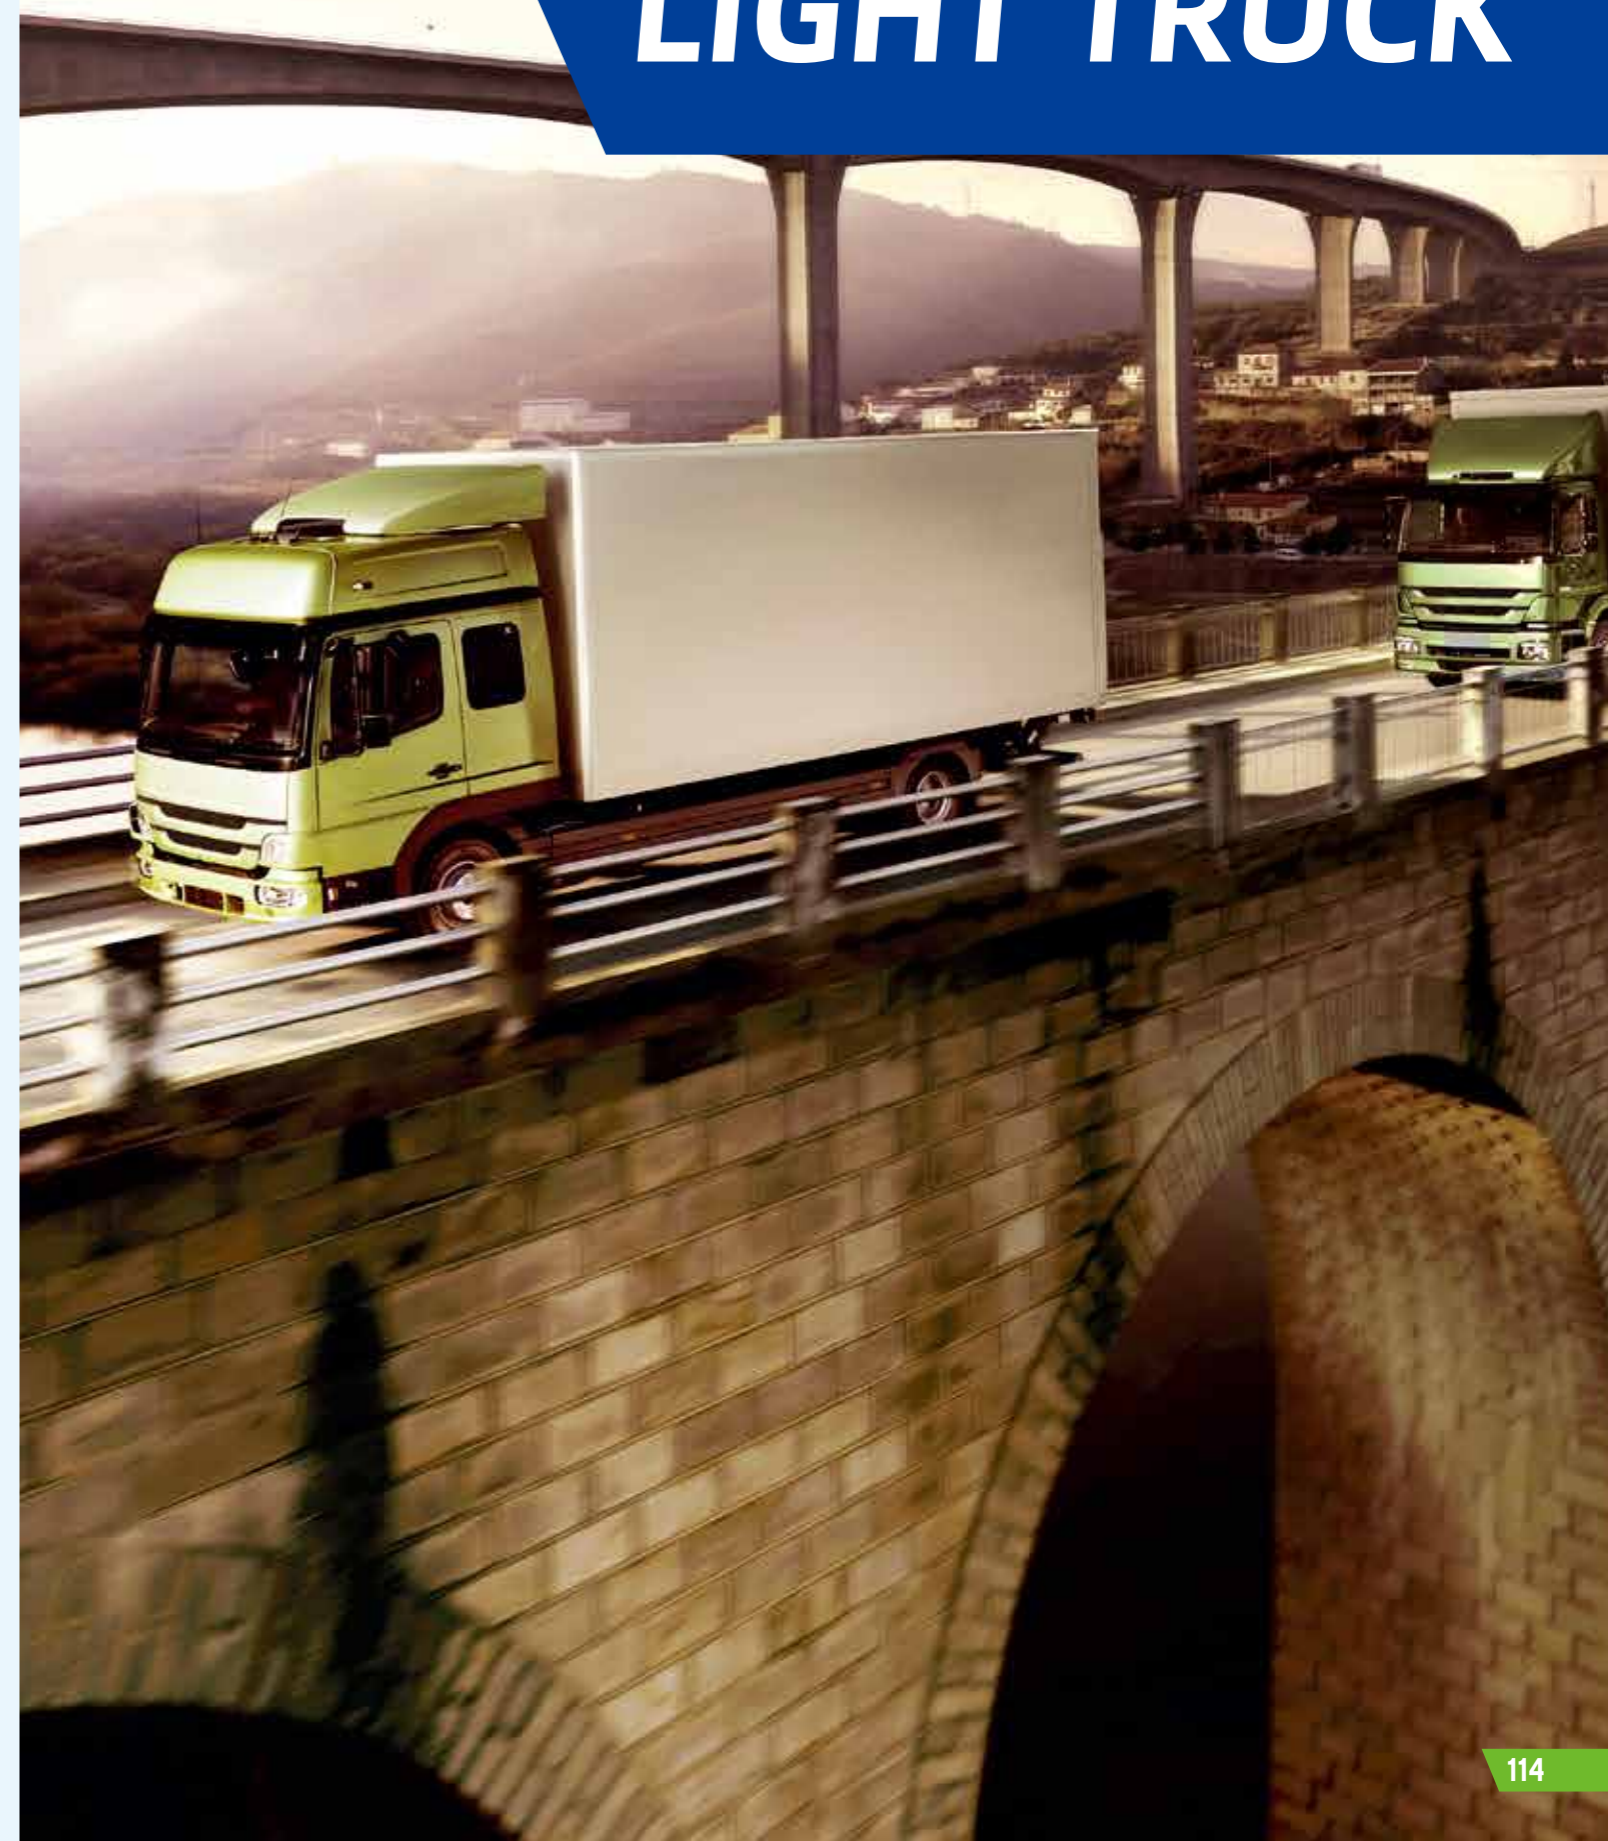



# KCA651

RADIAL TRUCK TIRE (REGIONAL)

- Suitable for all position axle of light trucks
- Thick sidewall design protects against sidewall impacts and bruises.
  - Zig-zag grooves for excellent handling.
  - HAT technology: low heat generation.

| Size      | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|           |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|           |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 7.00R16LT | 12         | 115/110    | M             | 5.50F        | 1060                           | 670 | 1215   | 670 | 775                   | 200                | 10.0             | GB             |
| 7.00R16LT | 14         | 118/114    | M             | 5.50F        | 1180                           | 770 | 1320   | 770 | 775                   | 200                | 10.0             | GB             |
| 7.50R16LT | 12         | 120/116    | M             | 6.00G        | 1250                           | 670 | 1400   | 670 | 805                   | 215                | 11.0             | GB             |
| 7.50R16LT | 14         | 122/118    | M             | 6.00G        | 1320                           | 770 | 1500   | 770 | 805                   | 215                | 11.0             | GB             |
| 8.25R16LT | 12         | 123/119    | M             | 6.50H        | 1360                           | 560 | 1550   | 560 | 855                   | 235                | 11.5             | GB             |
| 8.25R16LT | 14         | 126/122    | M             | 6.50H        | 1500                           | 670 | 1700   | 670 | 855                   | 235                | 11.5             | GB             |
| 8.25R16LT | 16         | 128/124    | M             | 6.50H        | 1600                           | 770 | 1800   | 770 | 855                   | 235                | 11.5             | GB             |



# KMA653

RADIAL TRUCK TIRE (ON&OFF ROAD)

- Suitable for all position axle of trucks
- Thick sidewall design protects against sidewall impacts and bruises.
  - Stone rejection design protects groove bottom from stone puncture
  - HAT technology: low heat generation.

| Size      | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|           |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|           |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 7.00R16LT | 12         | 115/110    | K             | 5.50F        | 1060                           | 670 | 1215   | 670 | 775                   | 200                | 11.5             | GB             |
| 7.00R16LT | 14         | 118/114    | K             | 5.50F        | 1180                           | 770 | 1320   | 770 | 775                   | 200                | 11.5             | GB             |
| 7.50R16LT | 12         | 120/116    | K             | 6.00G        | 1250                           | 670 | 1400   | 670 | 805                   | 215                | 12.5             | GB             |
| 7.50R16LT | 14         | 122/118    | K             | 6.00G        | 1320                           | 770 | 1500   | 770 | 805                   | 215                | 12.5             | GB             |
| 8.25R16LT | 12         | 123/119    | K             | 6.50H        | 1360                           | 560 | 1550   | 560 | 855                   | 235                | 13.0             | GB             |
| 8.25R16LT | 14         | 126/122    | K             | 6.50H        | 1500                           | 670 | 1700   | 670 | 855                   | 235                | 13.0             | GB             |
| 8.25R16LT | 16         | 128/124    | K             | 6.50H        | 1600                           | 770 | 1800   | 770 | 855                   | 235                | 13.0             | GB             |



# KMA652

RADIAL TRUCK TIRE (ON&OFF ROAD)

- Suitable for all position axle of light trucks
- Thick sidewall design protects against sidewall impacts and bruises.
  - Stone rejection design protects groove bottom from stone puncture.
  - HAT technology: low heat generation.

| Size      | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|           |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|           |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 7.00R16LT | 12         | 115/110    | K             | 5.50F        | 1060                           | 670 | 1215   | 670 | 775                   | 200                | 10.0             | GB             |
| 7.00R16LT | 14         | 118/114    | K             | 5.50F        | 1180                           | 770 | 1320   | 770 | 775                   | 200                | 10.0             | GB             |
| 7.50R16LT | 12         | 120/116    | K             | 6.00G        | 1250                           | 670 | 1400   | 670 | 805                   | 215                | 11.0             | GB             |
| 7.50R16LT | 14         | 122/118    | K             | 6.00G        | 1320                           | 770 | 1500   | 770 | 805                   | 215                | 11.0             | GB             |
| 8.25R16LT | 12         | 123/119    | K             | 6.50H        | 1360                           | 560 | 1550   | 560 | 855                   | 235                | 11.5             | GB             |
| 8.25R16LT | 14         | 126/122    | K             | 6.50H        | 1500                           | 670 | 1700   | 670 | 855                   | 235                | 11.5             | GB             |
| 8.25R16LT | 16         | 128/124    | K             | 6.50H        | 1600                           | 770 | 1800   | 770 | 855                   | 235                | 11.5             | GB             |



# KLD200

RADIAL TRUCK TIRE (REGIONAL DRIVE)

Suitable for medium trucks running on the high-grade road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 215/75R17.5 | 14         | 126/124    | M             | 6.00         | 1600                           | 700 | 1700   | 700 | 767                   | 211                | 14.0             | ETRTO          |
| 225/75R17.5 | 12         | 126/125    | M             | 6.75         | 1650                           | 675 | 1700   | 675 | 783                   | 226                | 14.5             | ETRTO          |
| 225/75R17.5 | 14         | 129/127    | M             | 6.75         | 1750                           | 725 | 1850   | 725 | 783                   | 226                | 14.5             | ETRTO          |
| 235/75R17.5 | 14         | 132/130    | M             | 6.75         | 1900                           | 775 | 2000   | 775 | 797                   | 233                | 14.5             | ETRTO          |
| 245/70R17.5 | 14         | 134/132    | M             | 7.50         | 2000                           | 775 | 2120   | 775 | 789                   | 248                | 14.5             | ETRTO          |
| 245/70R17.5 | 16         | 136/134    | M             | 7.50         | 2120                           | 850 | 2240   | 850 | 789                   | 248                | 14.5             | ETRTO          |
| 245/70R19.5 | 12         | 129/127    | M             | 7.50         | 1750                           | 660 | 1850   | 660 | 839                   | 248                | 14.5             | TRA            |
| 245/70R19.5 | 14         | 133/131    | M             | 7.50         | 1950                           | 760 | 2060   | 760 | 839                   | 248                | 14.5             | TRA            |
| 245/70R19.5 | 14         | 133/131    | M             | 7.50         | 1950                           | 750 | 2060   | 750 | 839                   | 248                | 14.5             | ETRTO          |
| 245/70R19.5 | 16         | 136/134    | M             | 7.50         | 2120                           | 825 | 2240   | 825 | 839                   | 248                | 14.5             | ETRTO          |



# KLS200

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for medium trucks running on the high-grade road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 215/75R17.5 | 14         | 126/124    | M             | 6.00         | 1600                           | 700 | 1700   | 700 | 767                   | 211                | 12.5             | ETRTO          |
| 215/75R17.5 | 16         | 135/133    | J             | 6.00         | 2060                           | 850 | 2180   | 850 | 767                   | 211                | 12.5             | ETRTO          |
| 225/75R17.5 | 12         | 126/125    | M             | 6.75         | 1650                           | 675 | 1700   | 675 | 783                   | 226                | 12.5             | ETRTO          |
| 225/75R17.5 | 14         | 129/127    | M             | 6.75         | 1750                           | 725 | 1850   | 725 | 783                   | 226                | 12.5             | ETRTO          |
| 235/75R17.5 | 14         | 132/130    | M             | 6.75         | 1900                           | 775 | 2000   | 775 | 797                   | 233                | 12.5             | ETRTO          |
| 235/75R17.5 | 16         | 141/140    | J             | 6.75         | 2500                           | 850 | 2575   | 850 | 797                   | 233                | 12.5             | ETRTO          |
| 235/75R17.5 | 18         | 143/141    | J             | 6.75         | 2575                           | 875 | 2725   | 875 | 797                   | 233                | 12.5             | ETRTO          |
| 245/70R17.5 | 14         | 134/132    | M             | 7.50         | 2000                           | 775 | 2120   | 775 | 789                   | 248                | 12.5             | ETRTO          |
| 245/70R17.5 | 16         | 136/134    | M             | 7.50         | 2120                           | 850 | 2240   | 850 | 789                   | 248                | 12.5             | ETRTO          |
| 245/70R17.5 | 18         | 143/141    | J             | 7.50         | 2575                           | 875 | 2725   | 875 | 789                   | 248                | 12.5             | ETRTO          |
| 245/70R19.5 | 12         | 129/127    | M             | 7.50         | 1750                           | 660 | 1850   | 660 | 839                   | 248                | 12.5             | TRA            |
| 245/70R19.5 | 14         | 133/131    | M             | 7.50         | 1950                           | 760 | 2060   | 760 | 839                   | 248                | 12.5             | TRA            |
| 245/70R19.5 | 14         | 133/131    | M             | 7.50         | 1950                           | 750 | 2060   | 750 | 839                   | 248                | 12.5             | ETRTO          |
| 245/70R19.5 | 16         | 136/134    | M             | 7.50         | 2120                           | 825 | 2240   | 825 | 839                   | 248                | 12.5             | ETRTO          |



# KLT200

RADIAL TRUCK TIRE (REGIONAL TRAILER)

Suitable for medium trucks running on the high-grade road.

| Size        | Ply Rating | Load Index       | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |                  |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |                  |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 205/65R17.5 | 16         | 129/127(132/132) | J(G)          | 6.00         | 1750                           | 900 | 1850   | 900 | 711                   | 205                | 13               | ETRTO          |
| 215/75R17.5 | 14         | 125/122          | L             | 6.00         | 1500                           | 760 | 1650   | 760 | 767                   | 211                | 12.5             | GB             |
| 215/75R17.5 | 14         | 126/124          | M             | 6.00         | 1600                           | 700 | 1700   | 700 | 767                   | 211                | 12.5             | ETRTO          |
| 215/75R17.5 | 16         | 127/124          | J             | 6.00         | 1600                           | 830 | 1750   | 830 | 767                   | 211                | 12.5             | GB             |
| 215/75R17.5 | 16         | 135/133          | J             | 6.00         | 2060                           | 850 | 2180   | 850 | 767                   | 211                | 12.5             | ETRTO          |
| 235/75R17.5 | 14         | 132/130          | M             | 6.75         | 1900                           | 775 | 2000   | 775 | 797                   | 233                | 12.5             | ETRTO          |
| 235/75R17.5 | 16         | 141/140          | J             | 6.75         | 2500                           | 850 | 2575   | 850 | 797                   | 233                | 12.5             | ETRTO          |
| 235/75R17.5 | 18         | 143/141          | J             | 6.75         | 2575                           | 875 | 2725   | 875 | 797                   | 233                | 12.5             | ETRTO          |
| 245/70R17.5 | 14         | 134/132          | M             | 7.50         | 2000                           | 775 | 2120   | 775 | 789                   | 248                | 12.5             | ETRTO          |
| 245/70R17.5 | 16         | 136/134          | M             | 7.50         | 2120                           | 850 | 2240   | 850 | 789                   | 248                | 12.5             | ETRTO          |
| 245/70R17.5 | 18         | 143/141          | J             | 7.50         | 2575                           | 875 | 2725   | 875 | 789                   | 248                | 12.5             | ETRTO          |



# KTD23

RADIAL TRUCK TIRE (REGIONAL DRIVE)

Suitable for drive axle of trucks using for high traction and high scrub applications.

- Horizontal pattern provides tyre excellent drive and braking performance.
- Shoulder pattern groove and open pattern design with good tire heat dissipation.
- Pattern block stiffener effectively restrains grinding block root tear and decorative pattern.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 215/75R17.5 | 16         | 135/133    | L             | 6.00         | 2060                           | 850 | 2180   | 850 | 767                   | 211                | 15.0             | ETRTO          |
| 225/70R19.5 | 12         | 125/123    | L             | 6.75         | 1550                           | 660 | 1650   | 660 | 811                   | 226                | 15.8             | TRA            |
| 225/70R19.5 | 14         | 128/126    | L             | 6.75         | 1700                           | 760 | 1800   | 760 | 811                   | 226                | 15.8             | TRA            |
| 245/70R19.5 | 14         | 133/131    | L             | 7.50         | 1950                           | 760 | 2060   | 760 | 839                   | 248                | 15.8             | TRA            |
| 245/70R19.5 | 16         | 135/133    | L             | 7.50         | 2060                           | 830 | 2180   | 830 | 839                   | 248                | 15.8             | TRA            |



# KJT016

RADIAL TRUCK TIRE (REGIONAL DRIVE)

Regional Haul Application / Pickup & Delivery Service Drive.

- Aggressive zigzag center grooves and open shoulder grooves provides outstanding traction in mud and snow;
- Stone rejectors protects the casing in base of the tread groove;
- Protect ribs on both sidewalls to fight damage from curbing, cuts and abrasions.
- 3D sipes lock together under compression for the stability of a solid block;
- Strong carcass materials help promote tire durability and provide tire retreadability.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 225/70R19.5 | 12         | 125/123    | M             | 6.75         | 1550                           | 660 | 1650   | 660 | 811                   | 226                | 15.0             | TRA            |
| 225/70R19.5 | 14         | 128/126    | N             | 6.75         | 1700                           | 760 | 1800   | 760 | 811                   | 226                | 15.0             | TRA            |



# LFL866

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

- Extra wide tread design for high mileage and even wear.
- Zig-zag grooves for excellent handling.
- Optimize structure design.

| Size        | Ply Rating | Load Index       | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |                  |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |                  |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 6.00R13LT   | 8          | 93/89            | L             | 4.50B        | 580                            | 460 | 650    | 460 | 655                   | 170                | 10.0             | GB             |
| 6.00R14LT   | 8          | 95/90            | L             | 4 1/2J       | 600                            | 460 | 690    | 460 | 680                   | 170                | 10.0             | GB             |
| 6.00R15LT   | 8          | 97/92            | L             | 4.50E        | 630                            | 460 | 730    | 460 | 705                   | 170                | 10.5             | GB             |
| 7.50R15LT   | 8          | 110/105          | L             | 6.00G        | 925                            | 460 | 1060   | 460 | 780                   | 215                | 13.0             | GB             |
| 7.50R15LT   | 10         | 115/110          | L             | 6.00G        | 1060                           | 560 | 1215   | 560 | 780                   | 215                | 13.0             | GB             |
| 6.50R16LT   | 12         | 110/105          | L             | 5.50F        | 925                            | 670 | 1060   | 670 | 750                   | 185                | 12.0             | GB             |
| 7.00R16LT   | 14         | 118/114          | L             | 5.50F        | 1180                           | 770 | 1320   | 770 | 775                   | 200                | 13.0             | GB             |
| 7.50R16LT   | 12         | 120/116          | M             | 6.00G        | 1250                           | 670 | 1400   | 670 | 805                   | 215                | 13.0             | GB             |
| 7.50R16LT   | 14         | 122/118          | M             | 6.00G        | 1320                           | 770 | 1500   | 770 | 805                   | 215                | 13.0             | GB             |
| 8.25R16LT   | 16         | 128/124          | L             | 6.50H        | 1600                           | 770 | 1800   | 770 | 855                   | 235                | 14.0             | GB             |
| 205/65R17.5 | 16         | 129/127(132/132) | J(G)          | 6.00         | 1750                           | 900 | 1850   | 900 | 711                   | 204                | 12.5             | ETRTO          |
| 215/70R17.5 | 14         | 123/121          | L             | 6.00         | 1550                           | 775 | 1450   | 775 | 747                   | 211                | 14.5             | JATMA          |
| 245/70R17.5 | 14         | 134/132          | M             | 7.50         | 2000                           | 775 | 2120   | 775 | 789                   | 248                | 14.5             | ETRTO          |
| 245/70R17.5 | 16         | 136/134          | M             | 7.50         | 2120                           | 850 | 2240   | 850 | 789                   | 248                | 14.5             | ETRTO          |
| 245/70R17.5 | 18         | 143/141          | J             | 7.50         | 2575                           | 875 | 2725   | 875 | 789                   | 248                | 14.5             | ETRTO          |
| 215/75R17.5 | 14         | 126/124          | M             | 6.00         | 1600                           | 700 | 1700   | 700 | 767                   | 211                | 14.5             | ETRTO          |
| 215/75R17.5 | 16         | 135/133          | J             | 6.00         | 2060                           | 850 | 2180   | 850 | 767                   | 211                | 14.5             | ETRTO          |
| 235/75R17.5 | 14         | 132/130          | M             | 6.75         | 1900                           | 775 | 2000   | 775 | 797                   | 233                | 14.5             | ETRTO          |
| 235/75R17.5 | 16         | 141/140          | J             | 6.75         | 2500                           | 850 | 2575   | 850 | 797                   | 233                | 14.5             | ETRTO          |
| 235/75R17.5 | 18         | 143/141          | J             | 6.75         | 2575                           | 875 | 2725   | 875 | 797                   | 233                | 14.5             | ETRTO          |
| 225/80R17.5 | 14         | 123/122          | L             | 6.75         | 1500                           | 700 | 1550   | 700 | 805                   | 226                | 16.0             | JATMA          |
| 225/90R17.5 | 14         | 127/125          | L             | 6.75         | 1650                           | 700 | 1750   | 700 | 851                   | 226                | 13.0             | JATMA          |
| 225/90R17.5 | 16         | 128/126          | L             | 6.75         | 1700                           | 700 | 1800   | 700 | 851                   | 226                | 13.0             | JATMA          |



# LDL831

RADIAL TRUCK TIRE (REGIONAL DRIVE)

- Typical block pattern design makes good towing and grip on wet and dry road.
- Strong wear resistance and long life.
- Retreadability.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 245/70R17.5 | 14         | 134/132    | M             | 7.50         | 2000                           | 775 | 2120   | 775 | 789                   | 248                | 18.0             | ETRTO          |
| 245/70R17.5 | 16         | 136/134    | M             | 7.50         | 2120                           | 850 | 2240   | 850 | 789                   | 248                | 18.0             | ETRTO          |
| 245/70R17.5 | 18         | 143/141    | J             | 7.50         | 2575                           | 875 | 2725   | 875 | 789                   | 248                | 18.0             | ETRTO          |
| 215/75R17.5 | 14         | 126/124    | M             | 6.00         | 1600                           | 700 | 1700   | 700 | 767                   | 211                | 16.0             | ETRTO          |
| 215/75R17.5 | 16         | 135/133    | J             | 6.00         | 2060                           | 850 | 2180   | 850 | 767                   | 211                | 16.0             | ETRTO          |
| 235/75R17.5 | 14         | 132/130    | M             | 6.75         | 1900                           | 775 | 2000   | 775 | 797                   | 233                | 17.0             | ETRTO          |
| 235/75R17.5 | 16         | 141/140    | J             | 6.75         | 2500                           | 850 | 2575   | 850 | 797                   | 233                | 17.0             | ETRTO          |
| 235/75R17.5 | 18         | 143/141    | J             | 6.75         | 2575                           | 875 | 2725   | 875 | 797                   | 233                | 17.0             | ETRTO          |



# LAR919

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Pattern block design reduces shoulder heat.
- Wide running surface and higher saturation design improves the wear mileage.

| Size      | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|           |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|           |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 6.00R14LT | 8          | 95/90      | K             | 4 1/2J       | 600                            | 460 | 690    | 460 | 680                   | 170                | 10.0             | GB             |
| 6.00R15LT | 8          | 97/92      | K             | 4.50E        | 630                            | 460 | 730    | 460 | 705                   | 170                | 10.5             | GB             |
| 6.50R16LT | 12         | 110/105    | K             | 5.50F        | 925                            | 670 | 1060   | 670 | 750                   | 185                | 12.0             | GB             |
| 7.00R16LT | 14         | 118/114    | K             | 5.50F        | 1180                           | 770 | 1320   | 770 | 775                   | 200                | 14.0             | GB             |
| 7.50R16LT | 14         | 122/118    | K             | 6.00G        | 1320                           | 770 | 1500   | 770 | 805                   | 215                | 15.0             | GB             |
| 8.25R16LT | 16         | 128/124    | K             | 6.50H        | 1600                           | 770 | 1800   | 770 | 855                   | 235                | 16.0             | GB             |



# LAR959

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Wide and deep tread grooves for long tire life.
- Excellent cutting and chipping resistance.
- Robust tread and high traction on rough surfaces.

| Size      | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|           |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|           |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 6.00R13LT | 8          | 93/89      | F             | 4.50B        | 580                            | 460 | 650    | 460 | 655                   | 170                | 12.5             | GB             |
| 6.00R14LT | 8          | 95/90      | F             | 4 1/2J       | 600                            | 460 | 690    | 460 | 680                   | 170                | 12.5             | GB             |
| 6.00R15LT | 8          | 97/92      | F             | 4.50E        | 630                            | 460 | 730    | 460 | 705                   | 170                | 12.5             | GB             |
| 6.50R16LT | 12         | 110/105    | F             | 5.50F        | 925                            | 670 | 1060   | 670 | 750                   | 185                | 13.5             | GB             |
| 7.00R16LT | 14         | 118/114    | F             | 5.50F        | 1180                           | 770 | 1320   | 770 | 783                   | 200                | 17.0             | GB             |
| 7.50R16LT | 14         | 122/118    | F             | 6.00G        | 1320                           | 770 | 1500   | 770 | 815                   | 215                | 18.0             | GB             |
| 8.25R16LT | 16         | 128/124    | D             | 6.50H        | 1600                           | 770 | 1800   | 770 | 865                   | 235                | 18.0             | GB             |
| 9.00R16LT | 16         | 134/129    | D             | 6.50H        | 1850                           | 770 | 2120   | 770 | 900                   | 255                | 18.0             | GB             |



# LLF26

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for medium trucks running on the high-grade road.

| Size      | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|           |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|           |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 8.25R15TR | 12         | 126/124    | M             | 6.50         | 1600                           | 720 | 1700   | 720 | 847                   | 236                | 12.5             | TRA            |
| 8.25R15TR | 14         | 129/127    | L             | 6.50         | 1750                           | 830 | 1850   | 830 | 847                   | 236                | 12.5             | TRA            |
| 7.50R16LT | 12         | 120/116    | M             | 6.00G        | 1250                           | 670 | 1400   | 670 | 805                   | 215                | 11.5             | GB             |
| 7.50R16LT | 14         | 122/118    | M             | 6.00G        | 1320                           | 770 | 1500   | 770 | 805                   | 215                | 11.5             | GB             |
| 8.25R16LT | 12         | 123/119    | M             | 6.50H        | 1360                           | 560 | 1550   | 560 | 855                   | 235                | 12.5             | GB             |
| 8.25R16LT | 14         | 126/122    | L             | 6.50H        | 1500                           | 670 | 1700   | 670 | 855                   | 235                | 12.5             | GB             |
| 8.25R16LT | 16         | 128/124    | L             | 6.50H        | 1600                           | 770 | 1800   | 770 | 855                   | 235                | 12.5             | GB             |
| 8.5R17.5  | 12         | 121/120    | M             | 6.00         | 1400                           | 625 | 1450   | 625 | 802                   | 215                | 12.5             | ETRTO          |
| 9.5R17.5  | 14         | 129/127    | M             | 6.75         | 1750                           | 750 | 1850   | 750 | 842                   | 240                | 12.0             | ETRTO          |
| 9.5R17.5  | 18         | 143/141    | M/J           | 6.75         | 2575                           | 875 | 2725   | 875 | 842                   | 240                | 12.0             | ETRTO          |
| 8R19.5    | 12         | 124/122    | M             | 6.00         | 1500                           | 760 | 1600   | 760 | 859                   | 203                | 12.5             | TRA            |



# F830

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for small trucks running on the high-grade road.

| Size      | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|           |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|           |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 7.00R16LT | 12         | 115/110    | M             | 5.50F        | 1060                           | 670 | 1215   | 670 | 775                   | 200                | 10.5             | GB             |
| 7.00R16LT | 14         | 118/114    | L             | 5.50F        | 1180                           | 770 | 1320   | 770 | 775                   | 200                | 10.5             | GB             |



# LLF86

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for medium trucks running on the high-grade road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 215/75R17.5 | 14         | 126/124    | L/M           | 6.00         | 1600                           | 700 | 1700   | 700 | 767                   | 211                | 12.5             | ETRTO          |
| 215/75R17.5 | 16         | 135/133    | J/L           | 6.00         | 2060                           | 850 | 2180   | 850 | 767                   | 211                | 12.5             | ETRTO          |



# F820

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for medium trucks running on the high-grade road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               | kg           | kPa                            | kg  | kPa    |     |                       |                    |                  |                |
| 8.5R17.5    | 12         | 121/120    | M             | 6.00         | 1400                           | 625 | 1450   | 625 | 802                   | 215                | 13.0             | ETRTO          |
| 205/75R17.5 | 14         | 124/122    | M             | 6.00         | 1500                           | 750 | 1600   | 750 | 753                   | 204                | 12.5             | ETRTO          |
| 215/75R17.5 | 12         | 124/123    | M             | 6.00         | 1550                           | 675 | 1600   | 675 | 767                   | 211                | 12.5             | ETRTO          |
| 215/75R17.5 | 14         | 126/124    | L/M           | 6.00         | 1600                           | 700 | 1700   | 700 | 767                   | 211                | 12.5             | ETRTO          |
| 215/75R17.5 | 16         | 135/133    | J/L           | 6.00         | 2060                           | 850 | 2180   | 850 | 767                   | 211                | 12.5             | ETRTO          |
| 235/75R17.5 | 14         | 132/130    | L/M           | 6.75         | 1900                           | 775 | 2000   | 775 | 797                   | 233                | 13.0             | ETRTO          |
| 235/75R17.5 | 16         | 141/140    | L             | 6.75         | 2500                           | 850 | 2575   | 850 | 797                   | 233                | 13.0             | ETRTO          |
| 235/75R17.5 | 18         | 143/141    | J             | 6.75         | 2575                           | 875 | 2725   | 875 | 797                   | 233                | 13.0             | ETRTO          |
| 225/70R19.5 | 12         | 125/123    | M             | 6.75         | 1550                           | 660 | 1650   | 660 | 811                   | 226                | 12.5             | TRA            |
| 225/70R19.5 | 14         | 128/126    | M             | 6.75         | 1700                           | 760 | 1800   | 760 | 811                   | 226                | 12.5             | TRA            |
| 245/70R19.5 | 12         | 129/127    | M             | 7.50         | 1750                           | 660 | 1850   | 660 | 839                   | 248                | 13.0             | TRA            |
| 245/70R19.5 | 14         | 133/131    | M             | 7.50         | 1950                           | 760 | 2060   | 760 | 839                   | 248                | 13.0             | TRA            |
| 245/70R19.5 | 14         | 133/131    | M             | 7.50         | 1950                           | 750 | 2060   | 750 | 839                   | 248                | 13.0             | ETRTO          |
| 245/70R19.5 | 16         | 136/134    | L/M           | 7.50         | 2120                           | 825 | 2240   | 825 | 839                   | 248                | 13.0             | ETRTO          |



# D905

RADIAL TRUCK TIRE (REGIONAL DRIVE)

- Suitable for medium trucks running on the high-grade road .
- Good braking and grip on wet road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               | kg           | kPa                            | kg  | kPa    |     |                       |                    |                  |                |
| 245/70R17.5 | 18         | 143/141    | L             | 7.50         | 2575                           | 875 | 2725   | 875 | 789                   | 248                | 18.0             | ETRTO          |
| 225/70R19.5 | 12         | 125/123    | L             | 6.75         | 1550                           | 660 | 1650   | 660 | 811                   | 226                | 15.0             | GB             |
| 225/70R19.5 | 14         | 128/126    | L             | 6.75         | 1700                           | 760 | 1800   | 760 | 811                   | 226                | 15.0             | GB             |
| 245/70R19.5 | 14         | 133/131    | M             | 7.50         | 1950                           | 760 | 2060   | 760 | 839                   | 248                | 16.5             | TRA            |
| 245/70R19.5 | 14         | 133/131    | M             | 7.50         | 1950                           | 750 | 2060   | 750 | 839                   | 248                | 16.5             | ETRTO          |
| 245/70R19.5 | 16         | 136/134    | M             | 7.50         | 2120                           | 825 | 2240   | 825 | 839                   | 248                | 16.5             | ETRTO          |
| 215/75R17.5 | 12         | 124/123    | M             | 6.00         | 1550                           | 675 | 1600   | 675 | 767                   | 211                | 15.0             | ETRTO          |
| 215/75R17.5 | 14         | 126/124    | L/M           | 6.00         | 1600                           | 700 | 1700   | 700 | 767                   | 211                | 15.0             | ETRTO          |
| 215/75R17.5 | 16         | 135/133    | J/L           | 6.00         | 2060                           | 850 | 2180   | 850 | 767                   | 211                | 15.0             | ETRTO          |
| 235/75R17.5 | 14         | 132/130    | L/M           | 6.75         | 1900                           | 775 | 2000   | 775 | 797                   | 233                | 15.5             | ETRTO          |
| 235/75R17.5 | 16         | 141/140    | J             | 6.75         | 2500                           | 850 | 2575   | 850 | 797                   | 233                | 15.5             | ETRTO          |
| 235/75R17.5 | 18         | 143/141    | J             | 6.75         | 2575                           | 875 | 2725   | 875 | 797                   | 233                | 15.5             | ETRTO          |



# LAM903

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Suitable for medium trucks running on on/off road.
- High traction.

| Size      | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|           |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|           |            |            |               | kg           | kPa                            | kg  | kPa    |     |                       |                    |                  |                |
| 7.50R16LT | 8          | 112/107    | L/M           | 6.00G        | 975                            | 460 | 1120   | 460 | 805                   | 215                | 9.5              | GB             |



# LLA78

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for medium trucks running on the high-grade road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               | kg           | kPa                            | kg  | kPa    |     |                       |                    |                  |                |
| 245/70R17.5 | 18         | 143/141    | J             | 7.50         | 2575                           | 875 | 2725   | 875 | 789                   | 248                | 12.0             | ETRTO          |
| 235/75R17.5 | 14         | 132/130    | L/M           | 6.75         | 1900                           | 775 | 2000   | 775 | 797                   | 233                | 13.0             | ETRTO          |
| 235/75R17.5 | 16         | 141/140    | J             | 6.75         | 2500                           | 850 | 2575   | 850 | 797                   | 233                | 13.0             | ETRTO          |
| 235/75R17.5 | 18         | 143/141    | J             | 6.75         | 2575                           | 875 | 2725   | 875 | 797                   | 233                | 13.0             | ETRTO          |



# D955

RADIAL TRUCK TIRE (ON&OFF ROAD DRIVE)

- Suitable for medium trucks running on the normal road.
- Good braking and grip on wet road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 7.00R16LT   | 12         | 115/110    | M             | 5.50F        | 1060                           | 670 | 1215   | 670 | 775                   | 200                | 12.5             | GB             |
| 7.50R16LT   | 12         | 120/116    | M             | 6.00G        | 1250                           | 670 | 1400   | 670 | 805                   | 215                | 14.5             | GB             |
| 7.50R16LT   | 14         | 122/118    | M             | 6.00G        | 1320                           | 770 | 1500   | 770 | 805                   | 215                | 14.5             | GB             |
| 8.25R16LT   | 12         | 123/119    | M             | 6.50H        | 1360                           | 560 | 1550   | 560 | 855                   | 235                | 15.5             | GB             |
| 8.25R16LT   | 14         | 126/122    | L             | 6.50H        | 1500                           | 670 | 1700   | 670 | 855                   | 235                | 15.5             | GB             |
| 8.25R16LT   | 16         | 128/124    | L             | 6.50H        | 1600                           | 770 | 1800   | 770 | 855                   | 235                | 15.5             | GB             |
| 225/70R19.5 | 12         | 125/123    | M             | 6.75         | 1550                           | 660 | 1650   | 660 | 811                   | 226                | 14.5             | TRA            |
| 225/70R19.5 | 14         | 128/126    | M             | 6.75         | 1700                           | 760 | 1800   | 760 | 811                   | 226                | 14.5             | TRA            |
| 245/70R19.5 | 14         | 133/131    | M             | 7.50         | 1950                           | 760 | 2060   | 760 | 839                   | 248                | 15.5             | TRA            |
| 245/70R19.5 | 14         | 133/131    | M             | 7.50         | 1950                           | 750 | 2060   | 750 | 839                   | 248                | 15.5             | ETRTO          |
| 245/70R19.5 | 16         | 136/134    | L             | 7.50         | 2120                           | 825 | 2240   | 825 | 839                   | 248                | 15.5             | ETRTO          |



# LLA08

RADIAL TRUCK TIRE (ON&OFF ROAD ALL POSITION)

- Suitable for medium trucks running on the normal road.
- Typical combined pattern.

| Size      | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|           |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|           |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 6.50R16LT | 10         | 107/102    | M             | 5.50F        | 850                            | 560 | 975    | 560 | 750                   | 185                | 10.5             | GB             |
| 6.50R16LT | 12         | 110/105    | L             | 5.50F        | 925                            | 670 | 1060   | 670 | 750                   | 185                | 10.5             | GB             |
| 7.00R16LT | 12         | 115/110    | M             | 5.50F        | 1060                           | 670 | 1215   | 670 | 775                   | 200                | 11.5             | GB             |
| 7.00R16LT | 14         | 118/114    | L             | 5.50F        | 1180                           | 770 | 1320   | 770 | 775                   | 200                | 11.5             | GB             |
| 7.50R16LT | 12         | 120/116    | M             | 6.00G        | 1250                           | 670 | 1400   | 670 | 805                   | 215                | 12.5             | GB             |
| 7.50R16LT | 14         | 122/118    | M             | 6.00G        | 1320                           | 770 | 1500   | 770 | 805                   | 215                | 12.5             | GB             |
| 8.25R16LT | 12         | 123/119    | M             | 6.50H        | 1360                           | 560 | 1550   | 560 | 855                   | 235                | 13.5             | GB             |
| 8.25R16LT | 14         | 126/122    | L             | 6.50H        | 1500                           | 670 | 1700   | 670 | 855                   | 235                | 13.5             | GB             |
| 8.25R16LT | 16         | 128/124    | L             | 6.50H        | 1600                           | 770 | 1800   | 770 | 855                   | 235                | 13.5             | GB             |
| 9.00R16LT | 14         | 131/126    | L             | 6.50H        | 1700                           | 670 | 1950   | 670 | 890                   | 255                | 14.5             | GB             |
| 9.00R16LT | 16         | 134/129    | L             | 6.50H        | 1850                           | 770 | 2120   | 770 | 890                   | 255                | 14.5             | GB             |



# D969

RADIAL TRUCK TIRE (OFF ROAD ALL POSITION)

- Good traction resistance.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

| Size      | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|           |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|           |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 7.00R16LT | 12         | 115/110    | F             | 5.50F        | 1060                           | 670 | 1215   | 670 | 775                   | 200                | 15.5             | GB             |
| 7.00R16LT | 14         | 118/114    | F             | 5.50F        | 1180                           | 770 | 1320   | 770 | 775                   | 200                | 15.5             | GB             |
| 7.50R16LT | 12         | 120/116    | F             | 6.00G        | 1250                           | 670 | 1400   | 670 | 815                   | 215                | 17.5             | GB             |
| 7.50R16LT | 14         | 122/118    | F             | 6.00G        | 1320                           | 770 | 1500   | 770 | 815                   | 215                | 17.5             | GB             |
| 8.25R16LT | 12         | 123/119    | F             | 6.50H        | 1360                           | 560 | 1550   | 560 | 865                   | 235                | 17.5             | GB             |
| 8.25R16LT | 14         | 126/122    | F             | 6.50H        | 1500                           | 670 | 1700   | 670 | 865                   | 235                | 17.5             | GB             |
| 8.25R16LT | 16         | 128/124    | F             | 6.50H        | 1600                           | 770 | 1800   | 770 | 865                   | 235                | 17.5             | GB             |



# LD0993

RADIAL TRUCK TIRE (OFF ROAD ALL POSITION)

- Off-road pattern block ensures powerful traction and good self-cleaning ability.
- Chip, cut and abrasion resistance tread compound.
- Deep tread depth increases mileage and service life.

| Size      | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-----------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|           |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|           |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 6.50R16LT | 12         | 110/105    | F             | 5.50F        | 925                            | 670 | 1060   | 670 | 750                   | 185                | 13.5             | GB             |
| 7.00R16LT | 14         | 118/114    | F             | 5.50F        | 1180                           | 770 | 1320   | 770 | 775                   | 200                | 14.5             | GB             |
| 7.50R16LT | 14         | 122/118    | F             | 6.00G        | 1320                           | 770 | 1500   | 770 | 815                   | 215                | 16.5             | GB             |
| 8.25R16LT | 16         | 128/124    | F             | 6.50H        | 1600                           | 770 | 1800   | 770 | 865                   | 235                | 18.0             | GB             |



# LLD09

RADIAL TRUCK TIRE (ON&OFF ROAD DRIVE)

- Suitable for medium trucks running on the normal road.
- Typical combined pattern.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 7.00R16LT   | 12         | 115/110    | M             | 5.50F        | 1060                           | 670 | 1215   | 670 | 775                   | 200                | 12.5             | GB             |
| 7.00R16LT   | 14         | 118/114    | L             | 5.50F        | 1180                           | 770 | 1320   | 770 | 775                   | 200                | 12.5             | GB             |
| 7.50R16LT   | 12         | 120/116    | M             | 6.00G        | 1250                           | 670 | 1400   | 670 | 805                   | 215                | 13.5             | GB             |
| 7.50R16LT   | 14         | 122/118    | M             | 6.00G        | 1320                           | 770 | 1500   | 770 | 805                   | 215                | 13.5             | GB             |
| 8.25R16LT   | 12         | 123/119    | L             | 6.50H        | 1360                           | 560 | 1550   | 560 | 855                   | 235                | 14.5             | GB             |
| 8.25R16LT   | 14         | 126/122    | K             | 6.50H        | 1500                           | 670 | 1700   | 670 | 855                   | 235                | 14.5             | GB             |
| 8.25R16LT   | 16         | 128/124    | K             | 6.50H        | 1600                           | 770 | 1800   | 770 | 855                   | 235                | 14.5             | GB             |
| 215/75R17.5 | 12         | 124/123    | K             | 6.00         | 1550                           | 675 | 1600   | 675 | 767                   | 211                | 14.0             | ETRTO          |
| 215/75R17.5 | 14         | 126/124    | K             | 6.00         | 1600                           | 700 | 1700   | 700 | 767                   | 211                | 14.0             | ETRTO          |
| 215/75R17.5 | 16         | 128/126    | K             | 6.00         | 1700                           | 750 | 1800   | 750 | 767                   | 211                | 14.0             | ETRTO          |
| 215/75R17.5 | 16         | 135/133    | K             | 6.00         | 2060                           | 850 | 2180   | 850 | 767                   | 211                | 14.0             | ETRTO          |
| 235/75R17.5 | 14         | 132/130    | K             | 6.75         | 1900                           | 775 | 2000   | 775 | 797                   | 233                | 15.0             | ETRTO          |
| 235/75R17.5 | 16         | 141/140    | K             | 6.75         | 2500                           | 850 | 2575   | 850 | 797                   | 233                | 15.0             | ETRTO          |
| 235/75R17.5 | 18         | 143/141    | K             | 6.75         | 2575                           | 875 | 2725   | 875 | 797                   | 233                | 15.0             | ETRTO          |
| 225/80R17.5 | 14         | 123/122    | K             | 6.75         | 1500                           | 700 | 1550   | 700 | 805                   | 226                | 15.0             | JATMA          |



# F835

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for small trucks running on the high-grade road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| LT225/75R16 | 12         | 119/116    | N             | 6.00         | 1250                           | 650 | 1360   | 650 | 744                   | 223                | 11.1             | TRA            |
| LT245/75R16 | 12         | 123/120    | N             | 7.00         | 1400                           | 650 | 1550   | 650 | 774                   | 248                | 11.1             | TRA            |
| LT235/85R16 | 14         | 126/123    | L             | 6 1/2J       | 1550                           | 750 | 1700   | 750 | 806                   | 235                | 8.9              | —              |
| ST235/85R16 | 14         | 132/127    | L             | 6 1/2J       | 1750                           | 760 | 2000   | 760 | 806                   | 235                | 8.9              | TRA            |



# LAL867

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for small trucks running on the high-grade road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 195/85R16LT | 12         | 114/112    | L             | 5 1/2J       | 1120                           | 600 | 1180   | 600 | 738                   | 196                | 10.0             | JATMA          |
| 205/85R16LT | 12         | 117/115    | L             | 5 1/2J       | 1215                           | 600 | 1285   | 600 | 754                   | 203                | 10.0             | JATMA          |



# LAL812

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

Suitable for small trucks running on the high-grade road.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 195/85R16LT | 12         | 114/112    | L             | 5 1/2J       | 1120                           | 600 | 1180   | 600 | 738                   | 196                | 10.0             | JATMA          |
| 205/85R16LT | 12         | 117/115    | L             | 5 1/2J       | 1215                           | 600 | 1285   | 600 | 754                   | 203                | 10.0             | JATMA          |



# LAL815

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

- Extra wide tread design for high mileage and even wear.
- Zig-zag grooves for excellent handling.
- Optimize structure design.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 225/80R17.5 | 14         | 123/122    | L             | 6.75         | 1500                           | 700 | 1550   | 700 | 805                   | 226                | 15.0             | JATMA          |

# COACH&URBAN



## LDU610

RADIAL BUS TIRE (URBAN DRIVE)

- Enhanced sidewall ensures high safety.
- Tire strength is increased by 35%,with application of ST steel cord.
- Tire bead cracking is prevented,with application fiber layer in bead area.

| Size    | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|---------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|         |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|         |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5 | 16         | 146/143    | J             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 21.5             | TRA            |
| 11R22.5 | 16         | 148/145    | J             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 21.5             | ETRTO          |



## LAU609

RADIAL BUS TIRE (URBAN ALL POSITION)

- Enhanced sidewall ensures high safety.
- Tire strength is increased by 35%,with application of ST steel cord.
- Tire bead cracking is prevented,with application fiber layer in bead area.

| Size        | Ply Rating | Load Index        | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|-------------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |                   |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |                   |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 305/70R22.5 | 20         | 152/150 (154/150) | J(F)          | 9.00         | 3350                           | 900 | 3550   | 900 | 1000                  | 305                | 21.0             | ETRTO          |
| 275/70R22.5 | 16         | 148/145           | J             | 8.25         | 2900                           | 900 | 3150   | 900 | 958                   | 276                | 21               | ETRTO          |
| 275/70R22.5 | 16         | 148/145 (152/148) | J(E)          | 8.25         | 2900                           | 900 | 3150   | 900 | 958                   | 276                | 21.0             | ETRTO          |
| 275/70R22.5 | 18         | 150/148(152/148)  | J(E)          | 8.25         | 3150                           | 900 | 3350   | 900 | 958                   | 276                | 21.0             | ETRTO          |
| 11R22.5     | 16         | 148/145           | J             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 21.0             | ETRTO          |
| 245/70R19.5 | 12         | 129/127           | J             | 7.50         | 1850                           | 660 | 1750   | 660 | 839                   | 248                | 16.0             | TRA            |
| 245/70R19.5 | 14         | 133/131           | J             | 7.50         | 2060                           | 760 | 1950   | 760 | 839                   | 248                | 16.0             | TRA            |
| 245/70R19.5 | 14         | 133/131           | J             | 7.50         | 2060                           | 750 | 1950   | 750 | 839                   | 248                | 16.0             | ETRTO          |
| 245/70R19.5 | 16         | 135/133           | J             | 7.50         | 2180                           | 830 | 2060   | 830 | 839                   | 248                | 16.0             | TRA            |
| 245/70R19.5 | 16         | 136/134           | J             | 7.50         | 2240                           | 825 | 2120   | 825 | 839                   | 248                | 16.0             | ETRTO          |



# LAU608

RADIAL BUS TIRE (COACH ALL POSITION)

- Enhanced sidewall ensures high safety.
- Tire strength is increased by 35%,with application of ST steel cord.
- Good wet traction.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 295/80R22.5 | 16         | 152/148    | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 17.0             | ETRTO          |
| 295/80R22.5 | 18         | 152/149    | M             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 17.0             | GB             |
| 295/80R22.5 | 18         | 154/149    | M             | 9.00         | 3250                           | 850 | 3750   | 850 | 1044                  | 298                | 17.0             | ETRTO          |



# LFL866

RADIAL TRUCK TIRE (REGIONAL ALL POSITION)

- Extra wide tread design for high mileage and even wear.
- Zig-zag grooves for excellent handling.
- Optimize structure design.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 6.00R15LT   | 8          | 97/92      | L             | 4.50E        | 630                            | 460 | 730    | 460 | 705                   | 170                | 10.5             | GB             |
| 7.50R15LT   | 8          | 110/105    | L             | 6.00G        | 925                            | 460 | 1060   | 460 | 780                   | 215                | 13.0             | GB             |
| 7.50R15LT   | 10         | 115/110    | L             | 6.00G        | 1060                           | 560 | 1215   | 560 | 780                   | 215                | 13.0             | GB             |
| 6.50R16LT   | 12         | 110/105    | L             | 5.50F        | 925                            | 670 | 1060   | 670 | 750                   | 185                | 12.0             | GB             |
| 7.00R16LT   | 14         | 118/114    | L             | 5.50F        | 1180                           | 770 | 1320   | 770 | 775                   | 200                | 13.0             | GB             |
| 7.50R16LT   | 12         | 120/116    | M             | 6.00G        | 1250                           | 670 | 1400   | 670 | 805                   | 215                | 13.0             | GB             |
| 7.50R16LT   | 14         | 122/118    | M             | 6.00G        | 1320                           | 770 | 1500   | 770 | 805                   | 215                | 13.0             | GB             |
| 8.25R16LT   | 16         | 128/124    | L             | 6.50H        | 1600                           | 770 | 1800   | 770 | 855                   | 235                | 14.0             | GB             |
| 8R22.5      | 14         | 130/128    | M             | 6.00         | 1800                           | 830 | 1900   | 830 | 935                   | 203                | 14.0             | GB             |
| 215/70R17.5 | 14         | 123/121    | L             | 6.00         | 1550                           | 775 | 1450   | 775 | 747                   | 211                | 14.5             | JATMA          |
| 245/70R17.5 | 14         | 134/132    | M             | 7.50         | 2000                           | 775 | 2120   | 775 | 789                   | 248                | 14.5             | ETRTO          |
| 245/70R17.5 | 16         | 136/134    | M             | 7.50         | 2120                           | 850 | 2240   | 850 | 789                   | 248                | 14.5             | ETRTO          |
| 245/70R17.5 | 18         | 143/141    | J             | 7.50         | 2575                           | 875 | 2725   | 875 | 789                   | 248                | 14.5             | ETRTO          |
| 215/75R17.5 | 14         | 126/124    | M             | 6.00         | 1600                           | 700 | 1700   | 700 | 767                   | 211                | 14.5             | ETRTO          |
| 215/75R17.5 | 16         | 135/133    | J             | 6.00         | 2060                           | 850 | 2180   | 850 | 767                   | 211                | 14.5             | ETRTO          |
| 235/75R17.5 | 14         | 132/130    | M             | 6.75         | 1900                           | 775 | 2000   | 775 | 797                   | 233                | 14.5             | ETRTO          |
| 235/75R17.5 | 16         | 141/140    | J             | 6.75         | 2500                           | 850 | 2575   | 850 | 797                   | 233                | 14.5             | ETRTO          |
| 235/75R17.5 | 18         | 143/141    | J             | 6.75         | 2575                           | 875 | 2725   | 875 | 797                   | 233                | 14.5             | ETRTO          |
| 225/80R17.5 | 14         | 123/122    | L             | 6.75         | 1500                           | 700 | 1550   | 700 | 805                   | 226                | 16.0             | JATMA          |
| 225/90R17.5 | 14         | 127/125    | L             | 6.75         | 1650                           | 700 | 1750   | 700 | 851                   | 226                | 13.0             | JATMA          |
| 225/90R17.5 | 16         | 128/126    | L             | 6.75         | 1700                           | 700 | 1800   | 700 | 851                   | 226                | 13.0             | JATMA          |



# LTL812

RADIAL BUS TIRE (COACH ALL POSITION)

- Suitable for all axle of bus riding on highway.
- Long life.
- Good grip performance.
- low eccentric wear.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 9R22.5      | 14         | 136/134    | M             | 6.75         | 2120                           | 830 | 2240   | 830 | 974                   | 229                | 15.0             | TRA            |
| 10R22.5     | 14         | 141/139    | M             | 7.50         | 2430                           | 790 | 2575   | 790 | 1019                  | 254                | 15.0             | TRA            |
| 10R22.5     | 14         | 144/142    | L             | 7.50         | 2650                           | 850 | 2800   | 850 | 1020                  | 254                | 15.0             | ETRTO          |
| 11R22.5     | 14         | 144/142    | M             | 8.25         | 2650                           | 720 | 2800   | 720 | 1054                  | 279                | 16.0             | TRA            |
| 11R22.5     | 16         | 146/143    | M             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 16.0             | TRA            |
| 11R22.5     | 16         | 148/145    | M             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 16.0             | ETRTO          |
| 12R22.5     | 16         | 152/148    | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1084                  | 300                | 17.0             | ETRTO          |
| 275/70R22.5 | 16         | 148/145    | M             | 8.25         | 2900                           | 900 | 3150   | 900 | 958                   | 276                | 16.0             | ETRTO          |
| 295/80R22.5 | 16         | 152/148    | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 17.0             | ETRTO          |
| 295/80R22.5 | 18         | 152/149    | M             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 17.0             | GB             |



# LAU802

RADIAL BUS TIRE (URBAN ALL POSITION)

- Enhanced sidewall ensures high safety.
- Long service life.
- Typical used for urban bus

| Size        | Ply Rating | Load Index        | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|-------------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |                   |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |                   |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5     | 16         | 146/143           | F             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 20.0             | TRA            |
| 11R22.5     | 16         | 148/145           | J             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 20.0             | ETRTO          |
| 255/70R22.5 | 16         | 140/137           | J             | 7.50         | 2300                           | 800 | 2500   | 800 | 930                   | 255                | 19.0             | ETRTO          |
| 275/70R22.5 | 16         | 148/145 (152/148) | J(E)          | 8.25         | 2900                           | 900 | 3150   | 900 | 958                   | 276                | 19.5             | ETRTO          |
| 305/70R22.5 | 16         | 152/148(154/150)  | J(E)          | 9.00         | 3150                           | 900 | 3550   | 900 | 1000                  | 305                | 20.0             | ETRTO          |
| 295/80R22.5 | 16         | 152/148(154/150)  | J(E)          | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 20.0             | ETRTO          |
| 295/80R22.5 | 18         | 152/149           | J             | 9.00         | 3250                           | 900 | 3550   | 900 | 1044                  | 298                | 20.0             | GB             |

# WINTER



## KWD700

RADIAL TRUCK TIRE ON ICE AND SNOW

- Long Haul Application Drive
- 3D Kerf technology provides excellent traction and long original tread life;
  - Wide tread design and combined structure of rib and block pattern provides stability, longer mileage, and better handling performance in all weather conditions;
  - Long life, low rolling resistance;
  - Optimizes the footprint for even wear and long tread life;
  - Strong carcass materials help promote tire durability and provide tire retreadability.

| Size    | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|---------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|         |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|         |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 11R22.5 | 16         | 146/143    | L             | 8.25         | 2725                           | 830 | 3000   | 830 | 1065                  | 279                | 21.5             | TRA            |
| 11R24.5 | 16         | 149/146    | L             | 8.25         | 3000                           | 830 | 3250   | 830 | 1116                  | 279                | 21.5             | TRA            |



## KWD600

RADIAL TRUCK TIRE ON ICE AND SNOW

- Suitable for drive axle of trucks under snow condition.
- Lasting grip and stability, with M+S and 3PMSF marking.
  - Optimized rib contact combats uneven wear and improves wet handling and braking.

| Size        | Ply Rating | Load Index       | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |                  |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |                  |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 295/80R22.5 | 16         | 152/148          | M             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 20.5             | ETRTO          |
| 315/70R22.5 | 16         | 154/150(152/148) | L(M)          | 9.00         | 3350                           | 900 | 3750   | 900 | 1014                  | 312                | 20.0             | ETRTO          |
| 315/70R22.5 | 18         | 156/150(154/150) | L(M)          | 9.00         | 3350                           | 900 | 4000   | 900 | 1014                  | 312                | 20.0             | ETRTO          |
| 315/80R22.5 | 18         | 154/150          | K             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 22.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150          | K             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 22.0             | ETRTO          |



# LFW806

RADIAL TRUCK TIRE ON ICE AND SNOW (ALL POSITION)

- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Low noise.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 6.50R16LT   | 10         | 107/102    | M             | 5.50F        | 850                            | 560 | 975    | 560 | 750                   | 185                | 11.0             | GB             |
| 6.50R16LT   | 12         | 110/105    | M             | 5.50F        | 925                            | 670 | 1060   | 670 | 750                   | 185                | 11.0             | GB             |
| 7.00R16LT   | 12         | 115/110    | M             | 5.50F        | 1060                           | 670 | 1215   | 670 | 775                   | 200                | 11.5             | GB             |
| 7.00R16LT   | 14         | 118/114    | L             | 5.50F        | 1180                           | 770 | 1320   | 770 | 775                   | 200                | 11.5             | GB             |
| 7.50R16LT   | 14         | 122/118    | M             | 6.00G        | 1320                           | 770 | 1500   | 770 | 805                   | 215                | 12.0             | GB             |
| 8.25R16LT   | 14         | 126/122    | L             | 6.50H        | 1500                           | 670 | 1700   | 670 | 855                   | 235                | 12.5             | GB             |
| 11R22.5     | 16         | 146/143    | M             | 8.25         | 2725                           | 800 | 3000   | 800 | 1054                  | 279                | 15.0             | JATMA          |
| 11R22.5     | 16         | 146/143    | M             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 15.0             | TRA            |
| 11R22.5     | 16         | 148/145    | L             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 15.0             | ETRTO          |
| 11R24.5     | 14         | 146/143    | M             | 8.25         | 2725                           | 720 | 3000   | 720 | 1104                  | 279                | 15.0             | TRA            |
| 11R24.5     | 16         | 149/146    | M             | 8.25         | 3000                           | 830 | 3250   | 830 | 1104                  | 279                | 15.0             | TRA            |
| 385/65R22.5 | 20         | 160(158)   | J(L)          | 11.75        | --                             | --  | 4500   | 900 | 1072                  | 389                | 16.5             | ETRTO          |
| 275/70R22.5 | 16         | 148/145    | M             | 8.25         | 2900                           | 900 | 3150   | 900 | 958                   | 276                | 15.0             | ETRTO          |
| 275/70R22.5 | 16         | 144/141    | M             | 8.25         | 2575                           | 830 | 2800   | 830 | 958                   | 276                | 15.0             | GB             |
| 315/70R22.5 | 16         | 154/150    | L             | 9.00         | 3350                           | 900 | 3750   | 900 | 1014                  | 312                | 15.0             | ETRTO          |
| 295/75R22.5 | 14         | 144/141    | M             | 9.00         | 2575                           | 760 | 2800   | 760 | 1026                  | 298                | 15.0             | TRA            |
| 295/75R22.5 | 16         | 146/143    | M             | 9.00         | 2725                           | 830 | 3000   | 830 | 1026                  | 298                | 15.0             | TRA            |
| 295/80R22.5 | 16         | 152/148    | K             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 15.0             | ETRTO          |
| 295/80R22.5 | 16         | 150/147    | K             | 9.00         | 3075                           | 830 | 3350   | 830 | 1044                  | 298                | 15.0             | GB             |
| 315/80R22.5 | 18         | 154/150    | K             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 15.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | K             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 15.0             | ETRTO          |



# LDW807

RADIAL TRUCK TIRE ON ICE AND SNOW (DRIVE)

- High safety and good handling.
- Optimized rib contact combats uneven wear and improves wet handling and braking.
- Long life.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 6.50R16LT   | 10         | 107/102    | M             | 5.50F        | 850                            | 560 | 975    | 560 | 750                   | 185                | 11.0             | GB             |
| 6.50R16LT   | 12         | 110/105    | M             | 5.50F        | 925                            | 670 | 1060   | 670 | 750                   | 185                | 11.0             | GB             |
| 7.00R16LT   | 12         | 115/110    | M             | 5.50F        | 1060                           | 670 | 1215   | 670 | 775                   | 200                | 11.5             | GB             |
| 7.00R16LT   | 14         | 118/114    | L             | 5.50F        | 1180                           | 770 | 1320   | 770 | 775                   | 200                | 11.5             | GB             |
| 7.50R16LT   | 14         | 122/118    | M             | 6.00G        | 1320                           | 770 | 1500   | 770 | 805                   | 215                | 14.5             | GB             |
| 8.25R16LT   | 14         | 126/122    | L             | 6.50H        | 1500                           | 670 | 1700   | 670 | 855                   | 235                | 15.5             | GB             |
| 11R22.5     | 16         | 146/143    | M             | 8.25         | 2725                           | 800 | 3000   | 800 | 1054                  | 279                | 20.0             | JATMA          |
| 11R22.5     | 16         | 146/143    | M             | 8.25         | 2725                           | 830 | 3000   | 830 | 1054                  | 279                | 20.0             | TRA            |
| 11R22.5     | 16         | 148/145    | L             | 8.25         | 2900                           | 850 | 3150   | 850 | 1050                  | 279                | 20.0             | ETRTO          |
| 315/70R22.5 | 16         | 154/150    | L             | 9.00         | 3350                           | 900 | 3750   | 900 | 1014                  | 312                | 20.0             | ETRTO          |
| 295/80R22.5 | 16         | 152/148    | K             | 9.00         | 3150                           | 850 | 3550   | 850 | 1044                  | 298                | 20.0             | ETRTO          |
| 295/80R22.5 | 16         | 150/147    | K             | 9.00         | 3075                           | 830 | 3350   | 830 | 1044                  | 298                | 20.0             | GB             |
| 315/80R22.5 | 18         | 154/150    | K             | 9.00         | 3350                           | 825 | 3750   | 825 | 1076                  | 312                | 20.0             | ETRTO          |
| 315/80R22.5 | 20         | 156/150    | K             | 9.00         | 3350                           | 850 | 4000   | 850 | 1076                  | 312                | 20.0             | ETRTO          |



# KWT600

- For trailer axle of trucks under snow condition use only.
- Lasting grip and stability ,with M+S and 3PMSF marking.
- Optimized rib contact combats uneven wear and improves wet handling and braking.

| Size        | Ply Rating | Load Index | Speed Symbols | Standard Rim | Max Load and Inflated Pressure |     |        |     | Overall Diameter (mm) | Section Width (mm) | Tread Depth (mm) | Operation Norm |
|-------------|------------|------------|---------------|--------------|--------------------------------|-----|--------|-----|-----------------------|--------------------|------------------|----------------|
|             |            |            |               |              | Dual                           |     | Single |     |                       |                    |                  |                |
|             |            |            |               |              | kg                             | kPa | kg     | kPa |                       |                    |                  |                |
| 385/55R22.5 | 18         | 158        | L             | 12.25        | --                             | --  | 4250   | 850 | 996                   | 386                | 14.5             | ETRTO          |
| 385/55R22.5 | 20         | 160(158)   | K(L)          | 12.25        | --                             | --  | 4500   | 900 | 996                   | 386                | 14.5             | ETRTO          |
| 385/65R22.5 | 20         | 160(158)   | K(L)          | 11.75        | --                             | --  | 4500   | 900 | 1072                  | 389                | 15.5             | ETRTO          |
| 385/65R22.5 | 24         | 164(158)   | K(L)          | 11.75        | --                             | --  | 5000   | 900 | 1072                  | 389                | 15.5             | ETRTO          |

